




Features


- Available in 27 finishes including 12 PVD finishes
- All brass decorative grid with no visible surface screws
- Surface is foot friendly with no sharp edges
- Rigid grid construction - will not dish or bend
- Square design for easy floor design and installation
- Outlet flow rate: 20 gpm (75 L/min) with 1/4" head of water when installed with drain rough 9177
- Drain rough or throat (9177, 9178, or 9178-UG-2) sold separately

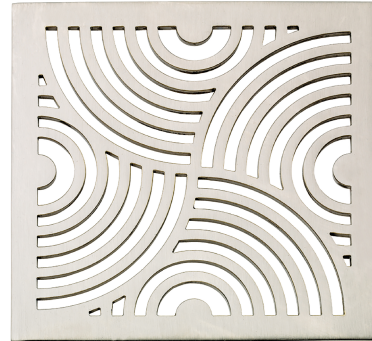

Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.2/CSA B125.2
- US PAT NO. 8043497

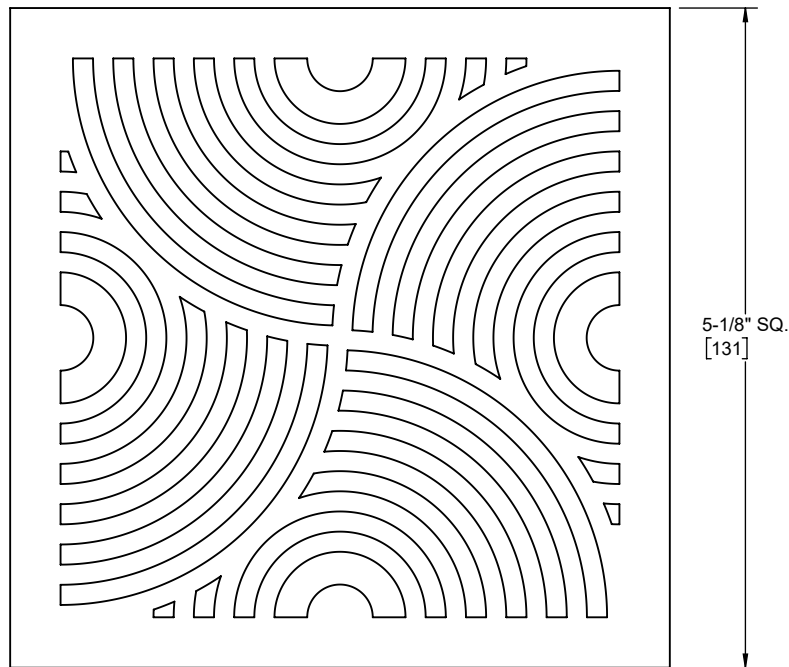

open area = 9.20 in² [5935.5 mm²]

