


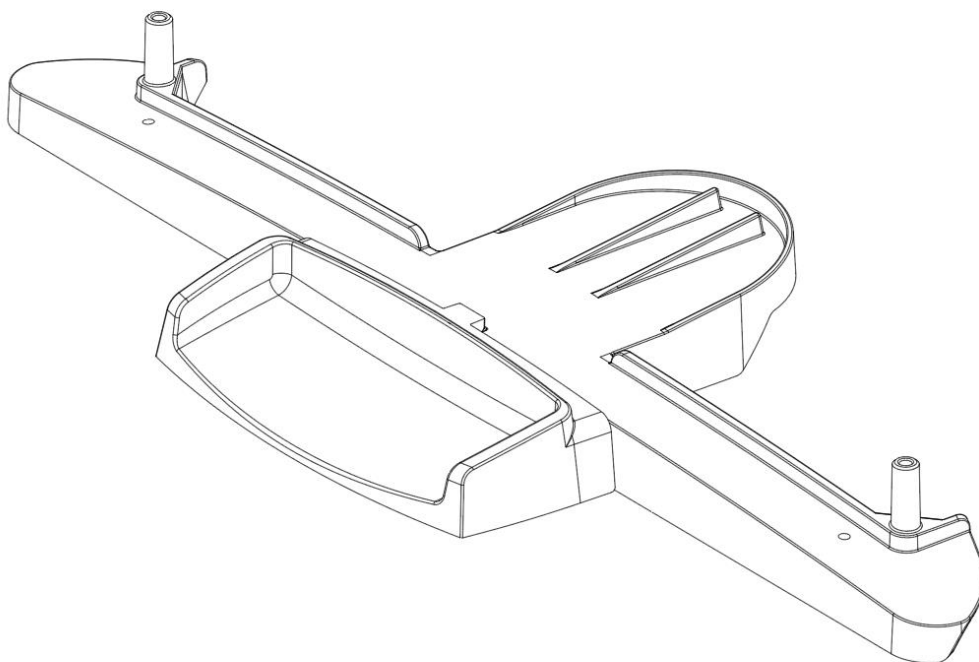


OASIS TO ELKAY SPILLWAY ADAPTER

INSTALLATION INSTRUCTIONS


NOTE: Unplug power supply and turn OFF water supply to both units while servicing.

1. Remove the two screws holding the bottle filler wrapper to the frame and allow the bottle filler to tilt forward.

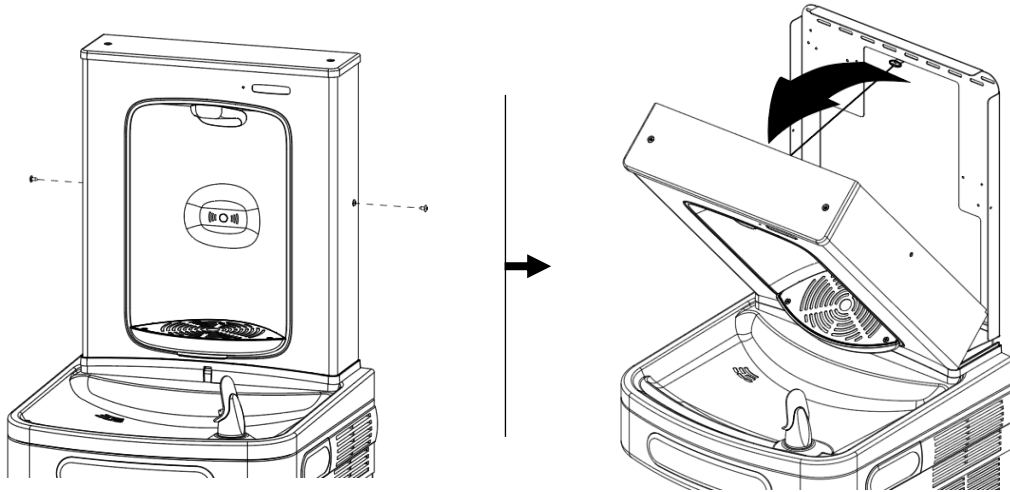


2. Lift the bottle filler and remove the original Elkay adapter. If the rubber bottle filler gasket is attached to the adapter, be sure to carefully set the bottle filler down so that it does not scratch the basin top. **DO NOT DISCARD THE RUBBER GASKET.**


Note: It may be necessary to loosen the anchor screws for the bottle filler frame for gasket and adapter removal.

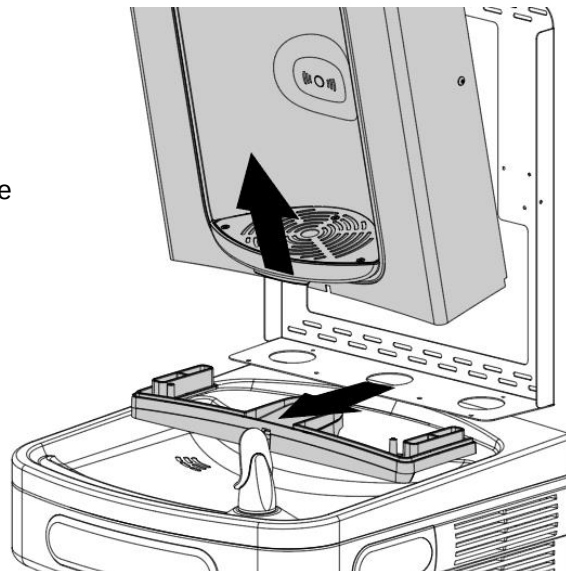

3. Replace the original hard plastic adapter with the new spillway assembly and reattach to the rubber gasket.

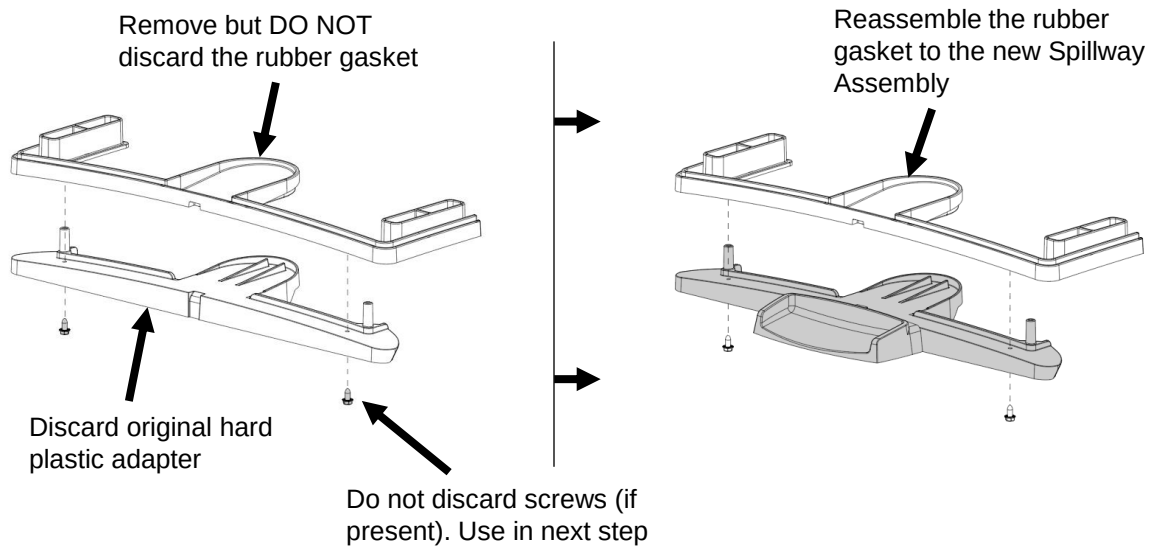


4. Slide the new assembly between the bottle filler frame and the fountain top. Ensure the drip tray sits flat on the fountain top.

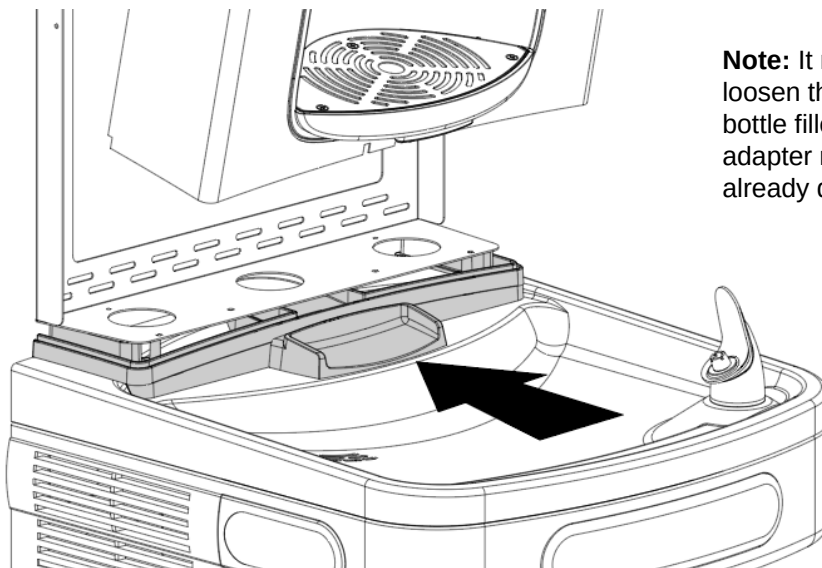


Note: It may be necessary to loosen the anchor screws for the bottle filler frame for gasket and adapter reassembly if not already done in step 2.

5. Reinstall the bottle filler. Be sure the wrapper is seated properly into the rubber gasket and secure the two side screws.

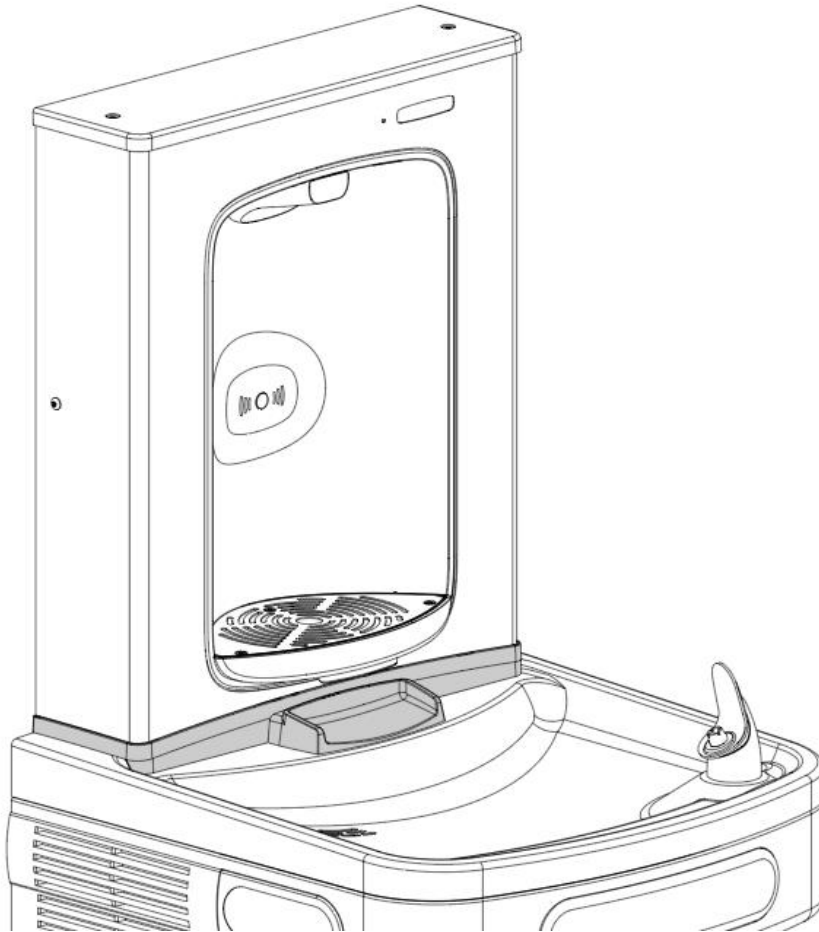

6. Turn the water supply back on and plug in on both units.

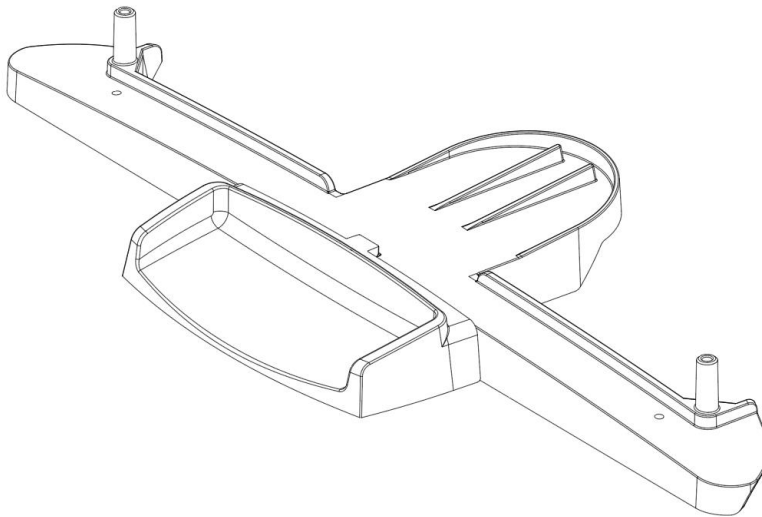

P/N 030099-715 Date: 8/2023

© 2023 LVD Acquisition, LLC

Oasis, Aqua Pointe, Versacooler and VersaFiller are registered trademarks of LVD Acquisition, LLC dba Oasis International

Haws is a registered trademark of HAWS Corporation.

Elkay and Halsey Taylor are registered trademarks owned or licensed by Elkay Sales Inc. and/or its parent Elkay Manufacturing Company



OASIS INTERNATIONAL
222 East Campus View Blvd.
Columbus, OH 43235
614-861-1350
www.oasiscoolers.com