

Aimpoint®

Instructions for THE ADAPTER TUBE for MPS3 FLIP-UP COVER



Aimpoint AB

Jägershillgatan 15
SE- 213 75 Malmö, Sweden
Phone +46 (0)40 671 50 20
Fax +46 (0)40 21 92 38
e-mail: info@aimpoint.se
www.aimpoint.com

Aimpoint Inc.

14103 Mariah Court
Chantilly, VA 20151-2113, USA
Phone +1 703-263-9795
Fax +1 703-263-9463
e-mail: info@aimpoint.com
www.aimpoint.com

THE FUTURE IN SIGHT™

PRESENTATION

The Aimpoint® Adapter tube is intended to be installed on the Aimpoint MPS3® red dot sight.

Once installed, the Adapter allows for mounting of the Aimpoint® Rear Flip-up Lenscover on the sight.

PHYSICAL SPECIFICATIONS

Weight: 18.6 g


Inner diameter: 37 mm

Height: 20 mm

Outer diameter: 48 mm

LOCATION AND DESCRIPTION OF MAJOR COMPONENTS

1. Adapter tube
2. O-ring

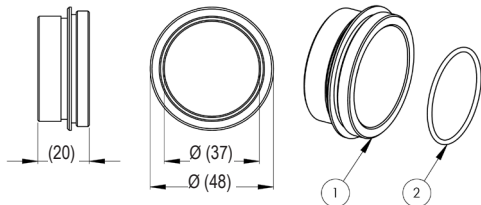

MOUNTING THE LENS COVERS

1. Make sure that the threads on the sight are free from dirt.
2. Lubricate the threads of the adaptor tube (1) with some grease alternative with Loctite to keep it in place permanently.
3. Tighten the adapter tube (1) clockwise by hand until it fastens.
4. Put the lens cover on the adapter (3).
5. Test that the lens cover can be opened and closed.

NOTE: The adapter tube (1) needs to be removed, when performing a zeroing to be able to reach the adjustment screw (4).

