


SECTION A-A

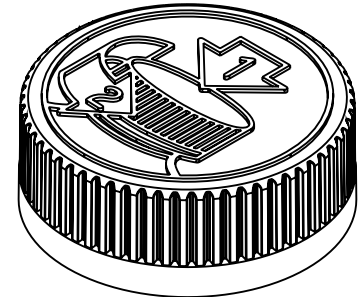

STATIC TORQUE RECOMMENDATION: 17-26 in-lbs
 REQUIREMENT MAY VARY DEPENDING UPON CONTAINER MATERIAL,
 NECK FINISH, AND CAPPING EQUIPMENT

REFERENCE	DIMENSION	TOLERANCE	UNITS
E	1.396 [35.46]	±0.010 [0.25]	in [mm]
T	1.488 [37.80]	±0.010 [0.25]	in [mm]
H (Seated)	0.521 [13.23]	REFERENCE	in [mm]
H (Inner)	0.388 [9.86]	±0.008 [0.20]	in [mm]
OD	1.760 [44.70]	±0.013 [0.33]	in [mm]
OAH	0.671 [17.04]	±0.011 [0.28]	in [mm]
PART WEIGHT	7.1	± 0.7	g
THREAD DETAIL INFORMATION:	6 THREADS PER INCH	0.167" [4.24] PITCH	380° FULL DEPTH THREADS

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITY TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG31849

DESCRIPTION:

38-400 PP Ribbed Sides Cap with CR Pictorial,
 020 SG-75M Liner

Safe-Gard™ Type A Technical Data Sheet

.020" Pulp SG-75M

Revision: SG75M-03142016

Product	.020" Pulp SG-75M																				
Scope	Two piece white-lined pulp backed heat induction foil innerseal that will provide a tamper evident seal to PE containers.																				
Composition	<table border="1"> <thead> <tr> <th>Material</th> <th>Standard</th> <th>Metric</th> </tr> </thead> <tbody> <tr> <td>Pulp</td> <td>0.020"</td> <td>0.508mm</td> </tr> <tr> <td>Wax</td> <td>-</td> <td>-</td> </tr> <tr> <td>Foil</td> <td>0.001"</td> <td>0.025mm</td> </tr> <tr> <td>PET Film</td> <td>0.0005"</td> <td>0.013mm</td> </tr> <tr> <td>Heat Seal</td> <td>0.0015"</td> <td>0.038mm</td> </tr> </tbody> </table>	Material	Standard	Metric	Pulp	0.020"	0.508mm	Wax	-	-	Foil	0.001"	0.025mm	PET Film	0.0005"	0.013mm	Heat Seal	0.0015"	0.038mm		
Material	Standard	Metric																			
Pulp	0.020"	0.508mm																			
Wax	-	-																			
Foil	0.001"	0.025mm																			
PET Film	0.0005"	0.013mm																			
Heat Seal	0.0015"	0.038mm																			

FDA Status: 21 CFR 177.1210	Recommended Storage and Handling: Refer to website	
Drug Master File (DMF): 3782	EU / EP Reg.:	
GTR Oxygen: Essentially Zero	MVTR: Essentially Zero	
Sealing to glass containers: Selig can not guarantee the performance or seal integrity of this materials when applied to any glass (treated or untreated) container. We suggest you contact your glass supplier for recommendations on glass treatments that may or may not improve performance or seal integrity.		
Print Location (if any): On foil layer		

Selig materials are compliant with limitation of heavy metals in packaging per CONEG & EU 94/62/EC, article 11.

DISTRIBUTED BY: 	REF NO.: DWG31849
DESCRIPTION: 38-400 PP Ribbed Sides Cap with CR Pictorial, 020 SG-75M Liner	

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITY TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.