

BLACK DIAMOND®

Project Name: _____

Location: _____

Item #: _____

Qty: _____

Black Diamond 1 Door Reach-In Refrigerator, 23.1 Cu. Ft. Capacity, in Stainless Steel

USRF-1D



Designed for busy commercial kitchens, the Black Diamond 1 Door Reach-In Refrigerator combines robust stainless steel construction and advanced temperature management for essential refrigerated storage. Its bottom-mount compressor system and adjustable digital controller ensure consistent cooling and maximum energy efficiency. Removable shelves, self-closing solid door with recessed handle, and casters deliver versatile organization and easy access, while ETL certifications back reliable performance.

FEATURES AND CONSTRUCTION

- 23.1 Cu. Ft. storage capacity
- Bottom-mounted, self-contained compressor design ensures optimal cooling efficiency
- Constructed of heavy-duty stainless steel both inside and out
- 3 removable plastic-coated wire shelves
- Front digital temperature controller with LED display
- Equipped with 4 heavy-duty casters for easy mobility
- Temperature range of 33°F to 40°F is ideal for preserving freshness
- Automatic defrost system minimizes maintenance
- 1 self-closing solid door with a recessed handle

ELECTRIC

115V / 60Hz / 1Ph

Cord Length (Inches): 98.40"

Plug Type: NEMA 5-15P

Cord set included

NEMA 5-15P



3RD PARTY APPROVALS



STORAGE CAPACITY

- Cubic Feet: 23.1 Cu. Ft.

TEMPERATURE

- Holding Temperature (Fahrenheit): 33° - 40°

These models are designed to operate in an environment where temperature and humidity do not exceed 75°F (24°C) and 55% relative humidity

WARRANTY (USA / CANADA)


Two (2) Year Limited Warranty on Parts and Labor, Five (5) Year Warranty on Compressor and Evaporator

Contact us for details at 1.877.368.2797





USRF-1D

FRONT

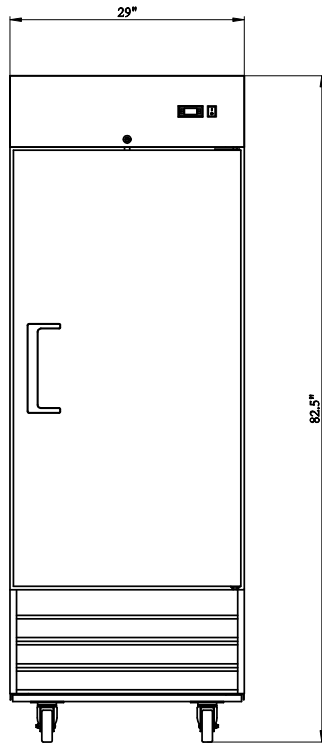

SIDE

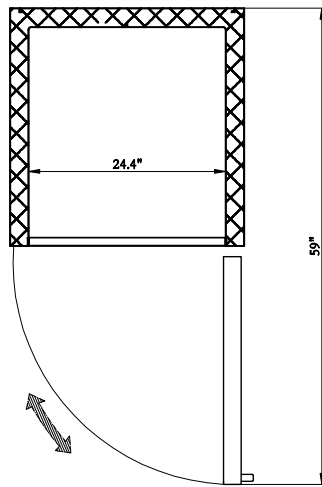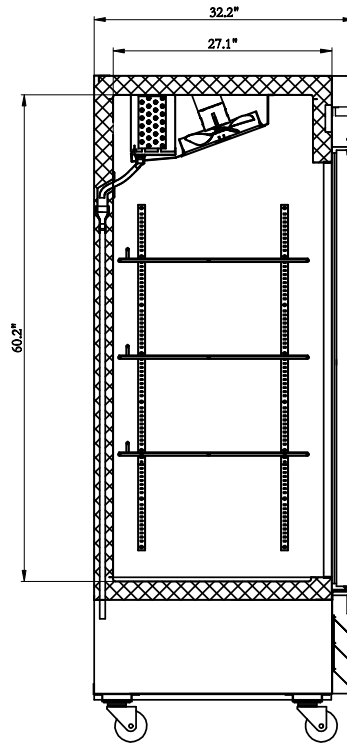

TOP

Reach-In

Doors	Shelves	Amps	HP	Refrigerant	Assembled Dimensions (in)	Item Weight (lbs)	Shipping Weight (lbs)
1	3	3.6A	1/5	R290 2.824	29.00" x 32.20" x 82.50"	281.6	321.0

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.