
Tower Lights and Beacons

Preassembled Tower Lights
60 mm Diameter
Harmony® XVC



XVC6B5 *XVC6M5*

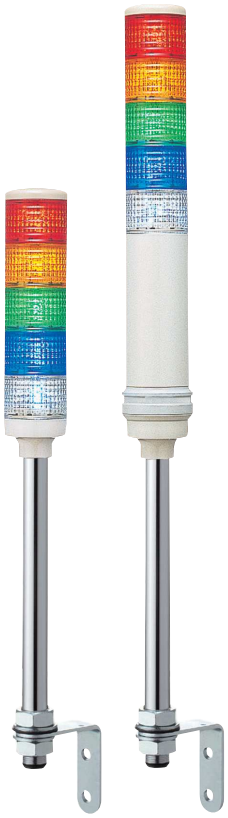

XVC6B5K *XVC6M5K*

Complete, Pre-wired Tower Lights 60 mm Diameter

Description	Light Source (included)	Voltage	Signaling Colors (1) Steady	Signaling Colors (1) Flashing (2)	Catalog Number	Weight kg (lb)
For Support Tube Mounting, 22 mm						
Without Buzzer	LED for steady light only	24 Vac/dc	R	—	**XVC6B1**	0.700 (1.54)
			R, O	—	**XVC6B2**	0.740 (1.63)
			R, O, G	—	**XVC6B3**	0.780 (1.72)
			R, O, G, B	—	**XVC6B4**	0.820 (1.81)
			R, O, G, B, C	—	**XVC6B5**	0.860 (1.90)
		100-240 Vac	R	—	**XVC6M1**	0.960 (2.12)
			R, O	—	**XVC6M2**	1.020 (2.25)
			R, O, G	—	**XVC6M3**	1.070 (2.36)
			R, O, G, B	—	**XVC6M4**	1.120 (2.47)
			R, O, G, B, C	—	**XVC6M5**	1.180 (2.60)
With Buzzer + Flashing Light	LED for steady or flashing light	24 Vac/dc	R	R	**XVC6B15S**	0.900 (1.98)
			R, O	R, O	**XVC6B25S**	0.940 (2.07)
			R, O, G	R, O, G	**XVC6B35S**	0.980 (2.16)
			R, O, G, B	R, O, G, B	**XVC6B45S**	1.020 (2.25)
			R, O, G, B, C	R, O, G, B, C	**XVC6B55S**	1.060 (2.34)
		100-240 Vac	R	R	**XVC6M15S**	1.010 (2.23)
			R, O	R, O	**XVC6M25S**	1.070 (2.36)
			R, O, G	R, O, G	**XVC6M35S**	1.120 (2.47)
			R, O, G, B	R, O, G, B	**XVC6M45S**	1.170 (2.58)
			R, O, G, B, C	R, O, G, B, C	**XVC6M55S**	1.230 (2.71)
For Base Mounting						
Without Buzzer	LED for steady light only	24 Vac/dc	R	—	**XVC6B1K**	0.200 (0.44)
			R, O	—	**XVC6B2K**	0.250 (0.55)
			R, O, G	—	**XVC6B3K**	0.300 (0.66)
			R, O, G, B	—	**XVC6B4K**	0.350 (0.77)
			R, O, G, B, C	—	**XVC6B5K**	0.400 (0.88)
		100-240 Vac	R	—	**XVC6M1K**	0.440 (0.97)
			R, O	—	**XVC6M2K**	0.500 (1.10)
			R, O, G	—	**XVC6M3K**	0.550 (1.21)
			R, O, G, B	—	**XVC6M4K**	0.600 (1.32)
			R, O, G, B, C	—	**XVC6M5K**	0.660 (1.46)
With Buzzer + Flashing Light	LED for steady or flashing light	24 Vac/dc	R	R	**XVC6B15SK**	0.200 (0.44)
			R, O	R, O	**XVC6B25SK**	0.250 (0.55)
			R, O, G	R, O, G	**XVC6B35SK**	0.300 (0.66)
			R, O, G, B	R, O, G, B	**XVC6B45SK**	0.350 (0.77)
			R, O, G, B, C	R, O, G, B, C	**XVC6B55SK**	0.400 (0.88)
		100-240 Vac	R	R	**XVC6M15SK**	0.490 (1.08)
			R, O	R, O	**XVC6M25SK**	0.550 (1.21)
			R, O, G	R, O, G	**XVC6M35SK**	0.600 (1.32)
			R, O, G, B	R, O, G, B	**XVC6M45SK**	0.650 (1.43)
			R, O, G, B, C	R, O, G, B, C	**XVC6M55SK**	0.710 (1.57)



XVCZ02



XVCZ12



XVCZ32

Accessories for Support Tube Mounting and Base Mounting

Description	For Use With	Diameter mm (in)	Minimum Height to be Added mm (in)	Catalog Number	Weight kg (lb)
Die-cast Metal Mounting Base for Support-tube Mounting	XVC6●● and XVC6●●5S	100 (3.94)	30 (1.18)	**XVCZ02**	0.080 (0.18)
Stamped Metal Plate for Base Mounting	XVC6●● K and XVC6●●5SK	84 (3.31)	21.6 (0.85)	**XVCZ12**	0.100 (0.22)
Wall Mounting Bracket for Support-tube Mounting	XVC6●● and XVC6●●5S	—	82 (3.23)	**XVCZ32**	0.130 (0.29)

(1) Signaling colors: R: Red, O: Orange, G: Green, B: Blue, C: Clear. The colors are listed in the same order as the mounting order of the illuminated units (from top to bottom).
(2) Flashing function can be simply selected/programmed by wiring.