













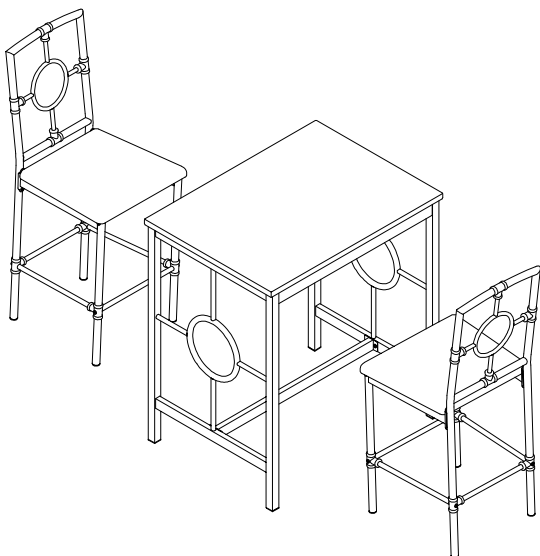


ASSEMBLY INSTRUCTION

3PC PACK COUNTER HEIGHT SET WITH FAUX MARBLE TOP


A Chair Side Frame	B Chair Front Rail	C Chair Back	D Seat Cushion
			
4PCS	4PCS	2PCS	2PCS
E Table Side Frame	F Table Bottom Stretcher	G Table Top Stretcher	H Table Top
			
2PCS	1PC	2PCS	1PC
I Bolt 1/4"*16mm	J Bolt 1/4"*19mm	K Bolt 1/4"*43mm	L Screw M5*70mm
			
20PCS	8PCS	12PCS	4PCS
M Screw M5*58mm	N L-Allen Key 4mm		
			
8PCS	1PC		



This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.

1


Attach the Chair Side Frame (A) to the Chair Back (C), insert the Bolt (J) and Bolt (K), turn the L-Allen Key (N) to tighten them.

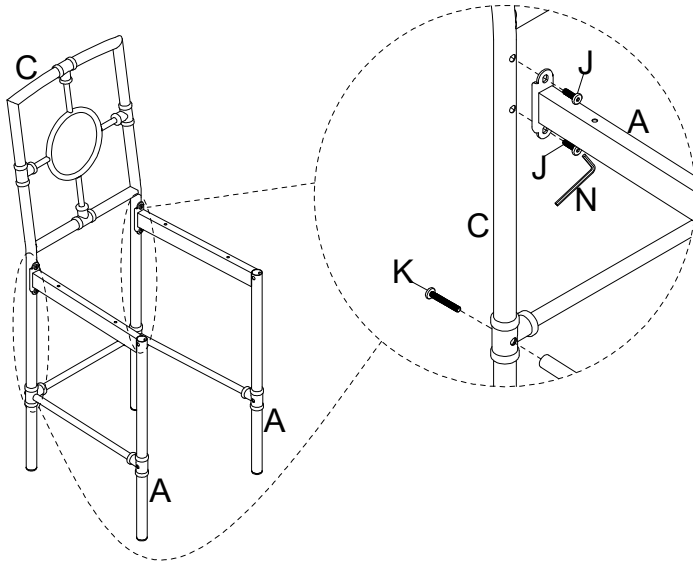


Take the Allen Key, and turn the bolts until the legs are secure. **DO NOT TIGHTEN COMPLETELY.** Stop when you feel you are adding force to tighten the bolts.

2

Attach the Chair Front Rail (B) to the Chair Side Frame (A), insert the Bolt (K), turn the L-Allen Key (N) to tighten them.

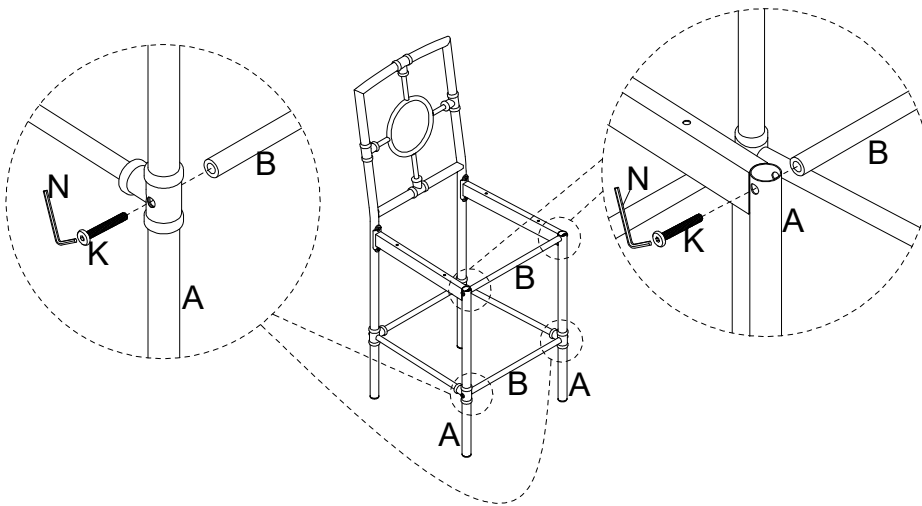**3**

Attach the Seat Cushion (D) to the Chair Side Frame (A), insert the Screw (M), turn the Screwdriver (not provided) to tighten them.

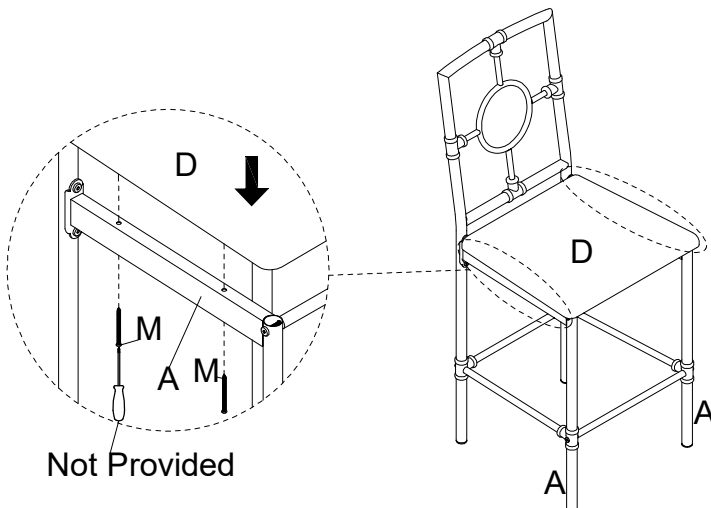


Not Provided

Stand chair up on an even surface and check that it is balanced. If there is a slight wobble, apply downward pressure in the corner where a leg is uneven. Keeping pressure in that corner, tighten all bolts. If balanced, apply downward pressure evenly in the center and tighten all bolts. Do not over-tighten beyond hole depth.


Helpful Tip:

-Instead of applying downward pressure while reaching under to tighten bolts, have someone sit in the chair while you tighten the bolts.


- 4** Attach the Table Side Frame (E) to the Table Top Stretcher (G), insert the Bolt (I), turn the L-Allen Key (N) to tighten them.

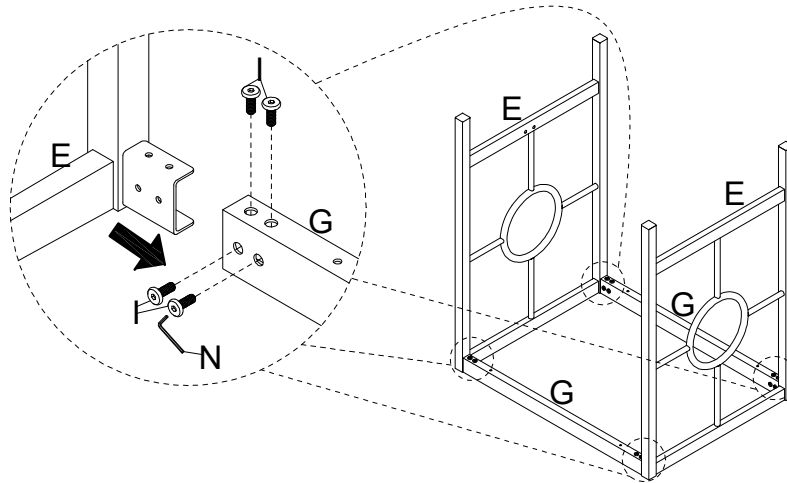

- 5** Place the Table Top (H) on the smooth and stable carpeted or padded surface. Attach the assembled frame to the Table Top (H), insert the Screw (L), turn the Screwdriver (not provided) to tighten them.

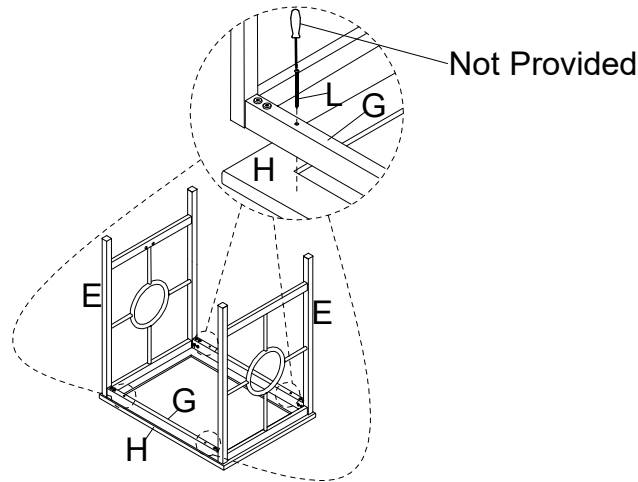

- 6** Attach the Table Bottom Stretcher (F) to the Table Side Frame (E), insert the Bolt (I), turn the L-Allen Key (N) to tighten them.

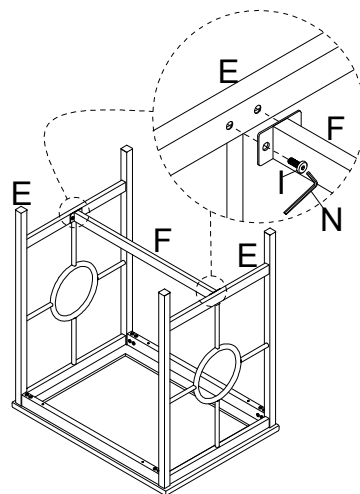

Cleaning & Care

Treat surface with care. Surface is resistant to scratches but is not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.