

SONANCE



PATIO SERIES DATA SHEET

(4) SATELLITE SPEAKERS | (4) GROUND STAKES | (1) SUBWOOFER
OPTIONAL: (1) UA 2-125 DSP AMPLIFIER

TECHNICAL SPECIFICATIONS

Model	Satellite Speaker	Subwoofer
Driver	3.5" (98mm) Anodized aluminum cone and Santoprene™ surround	8" (203mm) dual voice coil, polypropylene and Santoprene surround
Frequency Response	40Hz - 20kHz +/-3dB (System)	40Hz - 20kHz +/-3dB (System)
Crossover Frequency	125Hz	100Hz
Impedence	16 Ohms nominal	8 Ohms nominal per voice coil
System Impedence	8 Ohms nominal	8 Ohms nominal
Power Handling	50 watts minimum; 150 watts maximum	150 Watts
Sensitivity	85dB 2.83V / 1 meter	89dB Sensitivity @ 2.83V / 1 meter
Enclosure Material	High-heat ABS sealed enclosure, Non-corroding	High-heat ABS sealed enclosure, Non-corroding
Mounting Threads	1/2" NPS (National Pipe Standard)	-
Product Dimensions (HxD)	6.75" x 4.5" (171.35mm x 115mm)	21.4" x 12.4" (544mm x 315mm)
Shipping Weight	41.7 lbs (19 kg) System, no Amp 52.8 lbs (24 kg) System, with Amp	41.7 lbs (19 kg) System, no Amp 52.8 lbs (24 kg) System, with Amp

DIMENSIONAL DRAWINGS

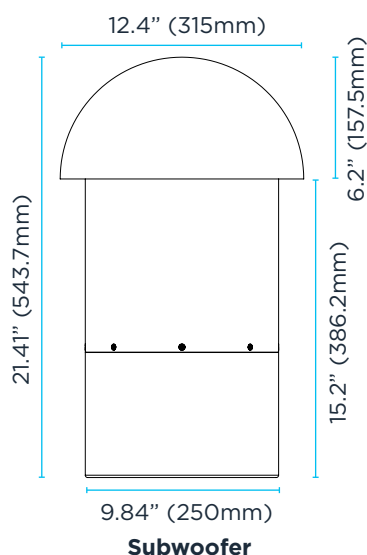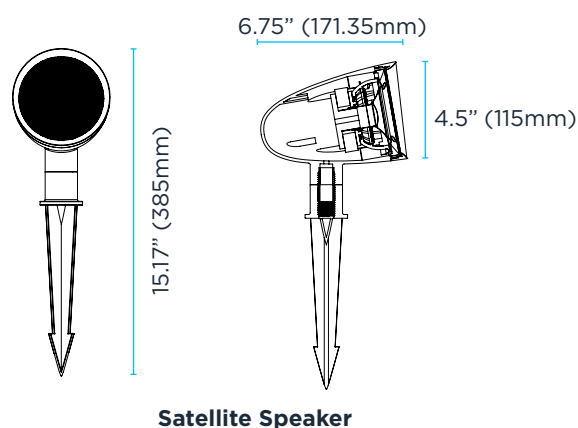

Patio Series 4.1 System
UA 2-125 DSP Amplifier
SKU 93730

Patio Series 4.1 System
(no amp)
SKU 93429