


PREPARATION


1. Record your model number for future reference.
2. **DANGER: Risk of electric shock.** To avoid electric shock, the power must be turned off at the circuit breaker or fuse box before beginning the installation procedure.
3. **DANGER: Risk of electric shock.** To avoid electric shock, the outlet box must be properly grounded.
4. **Important Information.** Inspect the product for any damages. This product is for indoor use only. Observe all local codes.
5. Your product may appear different than the one illustrated. The installation procedures remain the same.

Please see next page for a larger installation image


TOOLS AND MATERIALS NEEDED




Phillips & Flathead
Screwdriver




Slip Joint
Pliers




Small Adjustable
Wrench



Wire
Cutter/stripper





Electrical
Current Tester



Electrical
Tape

FIXTURE INSTALLATION

1. Remove the fixture and parts bag(s) from the carton. Put them onto a clean and soft cloth to protect finish. Confirm all parts are included.
2. Thread wire through canopy (E), joint ball (D); install joint ball (D) onto rod (F).
3. Loosen knob (G), slide rod (H) out to desired height then tighten knob (G).
4. Trim excess wires to minimum 10" beyond canopy (E), strip wires to 5/8" at the end and twist.
5. Install shade (I), cage (K) onto fixture with socket ring (J).
6. Attach mounting plate (B) onto outlet box with screws (C). Ensure the direction of ground screw (M) is as shown.
7. **NOTICE:** To avoid short circuit, make sure wires are not exposed. Fasten fixture green or bare ground wires to the green or bare copper wire in outlet box with wire nut (A) or fasten onto ground screw (M) on mounting plate.
8. **NOTICE:** To avoid short circuit, make sure wires are not exposed. Fasten fixture white wires to the white wire in outlet box with wire nut (A). Wrap the wire connector with electrical tape so that the tape seals the end of wire nut (A), see diagram.
9. **NOTICE:** To avoid short circuit, make sure wires are not exposed. Fasten fixture lead wire without ridge(s) or black wire to the black wire in outlet box with wire nut (A). Wrap the wire connector with electrical tape so that the tape seals the end of wire nut (A), see diagram.
10. Tuck wires carefully inside outlet box. Attach the canopy (E) onto mounting plate (B) and secure it with screws (L).
11. **NOTICE:** Do not exceed recommended wattage. Install lamp(s). Rated for **SKU23663 Max 60 W, Type G25; SKU23664 Max 100 W, Type G40.** (Bulb(s) not included).
12. Restore power to circuit at breaker or fuse box.

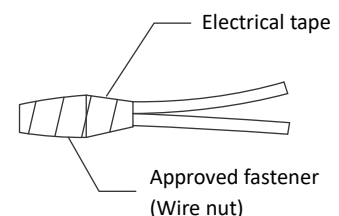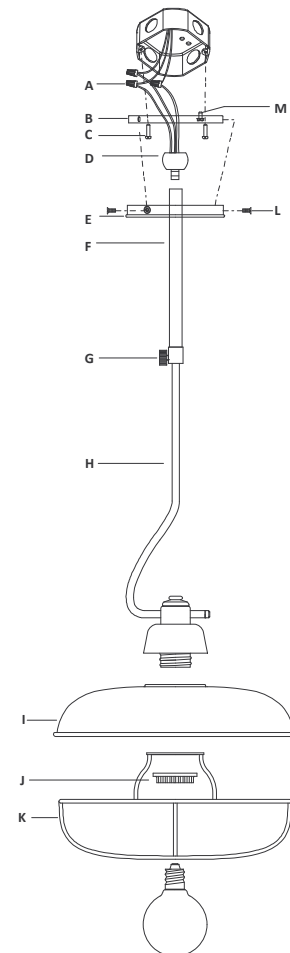

CLEANING

Please clean fixture with a soft and dry cloth ONLY. Clean glass with a mild soap.

