INSTALLATION AND SAFETY INSTRUCTIONS

FOR YOUR SAFETY

WARNING: BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS SHUT OFF.

GENERAL

You don't need special tools to install this fixture. Be sure to follow the steps in the order given. Under no circumstances should a fixture be hung on house electrical wires, nor should a swag type fixture be installed on a ceiling, which contains a radiant type heating system. Read instructions carefully. If you are unclear as to how to proceed, consult a qualified electrician.

NOTE: Proper wiring is essential for the safe operation of this fixture.

FIXTURE ASSEMBLY

Carefully removed the fixture from the carton and check that all parts are included as shown in figure. Be careful not to misplace any of the screws or parts, which are needed to install this fixture.

STEP 1: Connect Frame, Chain(G) and Canopy with key link.

INSTALLATION


IMPORTANT: Do not attach fixture directly to outlet box.

STEP 1: Attach the Crossbar (C) to the outlet Box (A) with the two outlet Box screws (B) as shown. The side of the Crossbar marked "GND" must face out.

STEP 2: Thread the Nipple (D) part way into the center hole of the Crossbar (C), and secure with the washer and hex nut.

STEP 3: Lace wires up through chain and pass wires through holes in canopy. We recommend lacing wire up through every other link of chain.

WIRE CONNECTION FOR TRANSFORMER

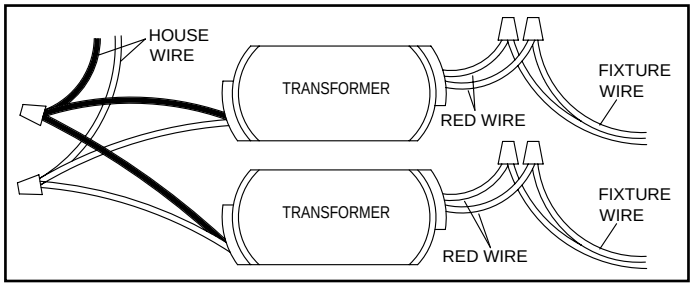

GROUNDING INSTALLATIONS

STEP 1: Insert the green grounding screw into the hole with two raised dimples on the Universe mounting bar. Wrap the ground wire from the fixture (if supplied) around the green grounding screw, then connect it to ground wire from the outlet box (if not fixed on the outlet box) using a wire connector. If ground wire from the fixture is not supplied, wrap the ground wire (if not fixed on the outlet box) from the outlet box around the green grounding screw and tighten it.

NEVER CONNECT GROUND WIRE TO BLACK OR WHITE POWER SUPPLY WIRES.

STEP 2: Take black wires of transformer and place evenly against the black wire from the outlet box. Do NOT twist wires together before using wire connectors.

STEP 3: Fit a wire connector (not supplied) over the wires and screw the connector clockwise until you feel firmness.

STEP 4: Can pull the connector off, carefully re-do steps 2 and 3, as above, and check again for a firm connection.

STEP 6: Connect white wires of transformer to the white wire from the outlet box in the same manner. Make sure no bare wires can be seen outside wire connectors.

FINAL ASSEMBLY

STEP 1: After wires are connected, place the Canopy (E) over the Nipple (D) so the Nipple (D) protrudes through the center hole.

STEP 2: Holding the fixture in place, thread the nut and Ball Nut (F) onto the end of the Nipple (D) until Canopy (E) is secured to the ceiling.


STEP 3: Install lamps. (Please do not exceed the maximum capacity recommended on the socket.)

CLEANING

To clean, wipe fixture with a soft cloth. Clean glass with a mild soap. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

ORDERING PARTS

Keep this sheet for future reference, and in case you need to order replacement parts. All parts for this fixture can be ordered from place of purchase. Be sure to use exact wording from illustration when ordering parts.

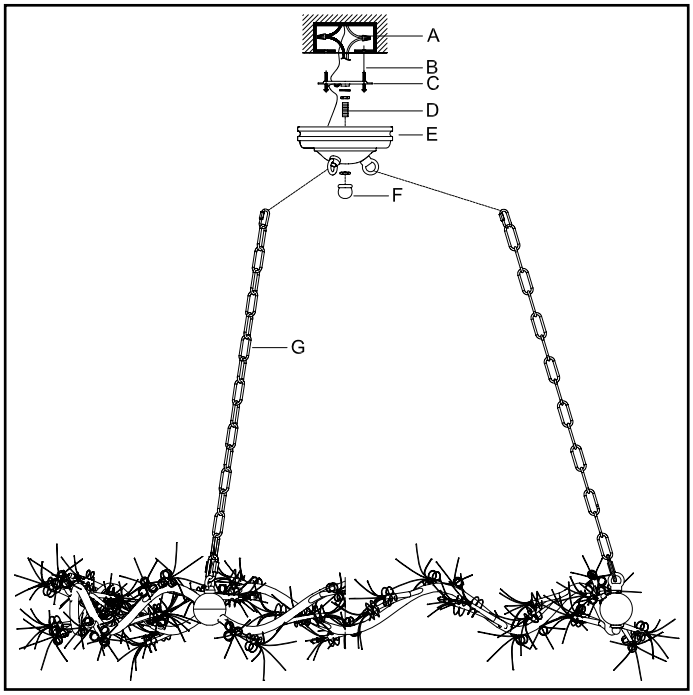

ITEM NO.: AJC-9083

NOTE: DO NOT EXCEED RECOMMENDED

WATTAGE. 10 Watt 12 Type G4 Halogen Bulbs (INCLUDED).