

LANGLEY WOOD QUEEN BED


ASSEMBLY INSTRUCTIONS

MODUS
FURNITURE

PARTS PACKING CONFIGURATIONS


BOX #1:
A. HEADBOARD

1 PC

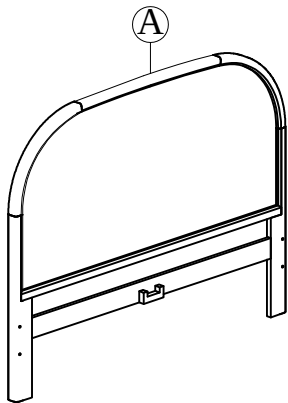


BOX #2:
B. FOOTBOARD
C. SLAT ROLL

1 PC
1 SET

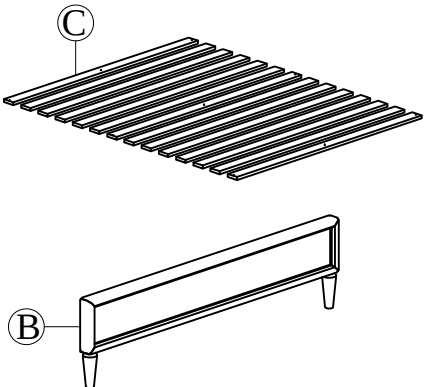


BOX #3:
D. SIDE RAILS
E. CENTER SUPPORT
F. SUPPORT LEG

2 PCS
1 PC
5 PCS

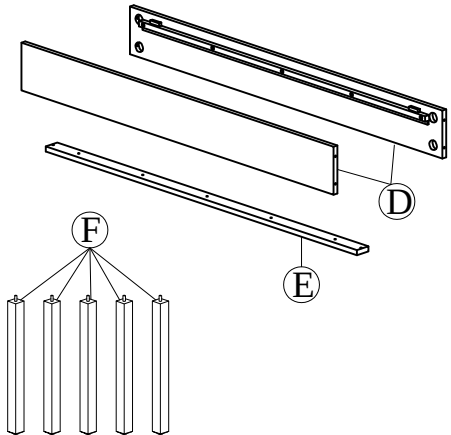

FULLY ASSEMBLED

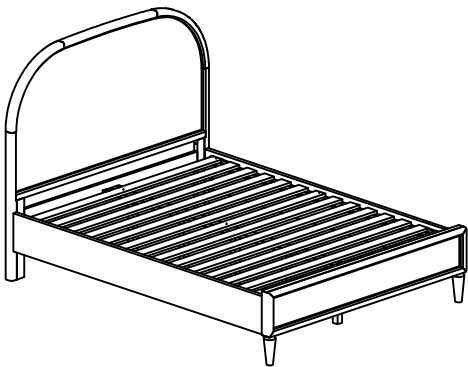


Not provided

HARDWARE KIT PACKED IN BOX #2

No.	Description	Image	Quantity
1	THREADED BOLT (8x90mm)		8 PCS
2	HALF MOON WASHER (7x14x27mm)		8 PCS
3	HEX NUT (M8)		8 PCS
4	WRENCH (13mm)		1 PC
5	WOOD SCREW (4x30mm)		11 PCS
6	ALLEN KEY (4mm)		1 PC

STEP 1:

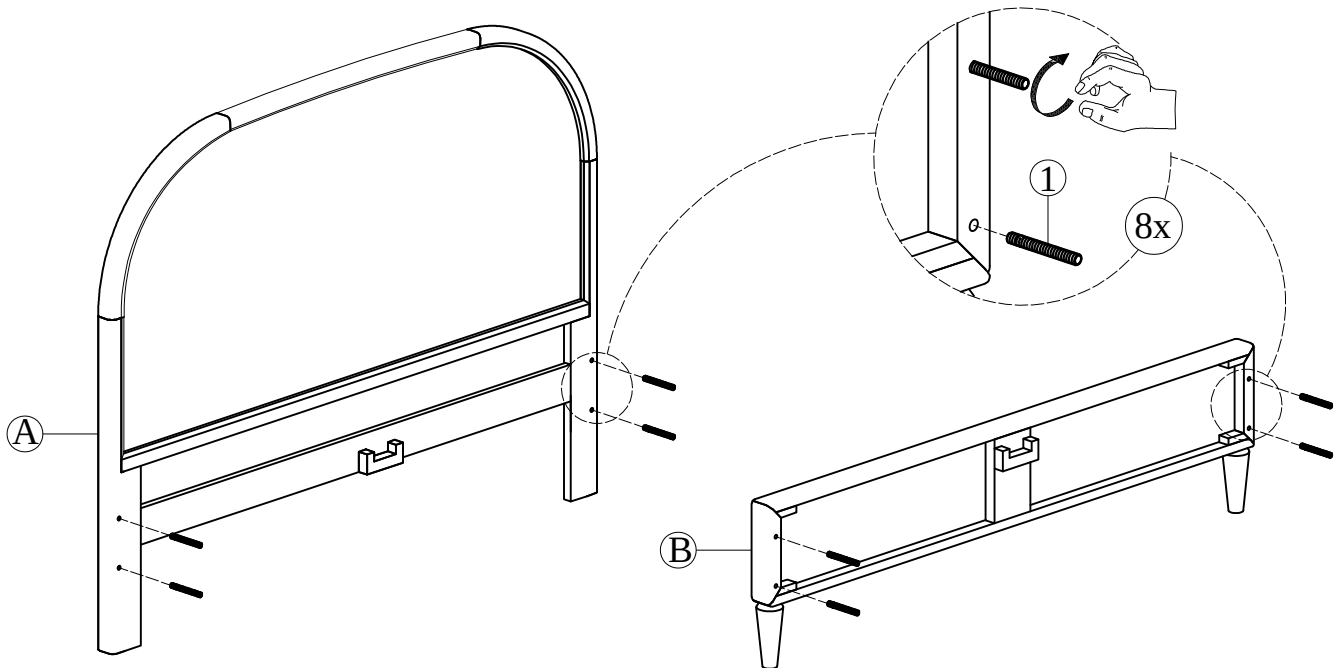


LANGLEY WOOD QUEEN BED


ASSEMBLY INSTRUCTIONS



STEP 2:

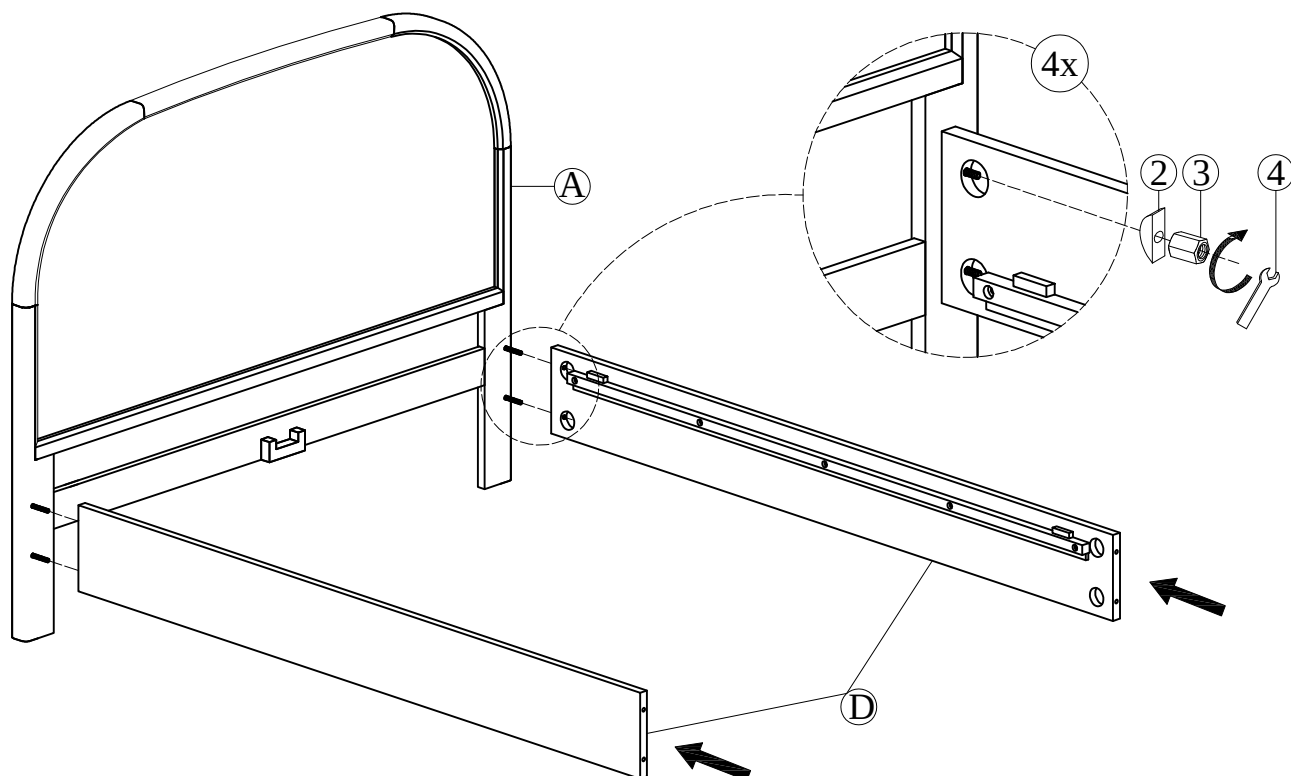

STEP 3:

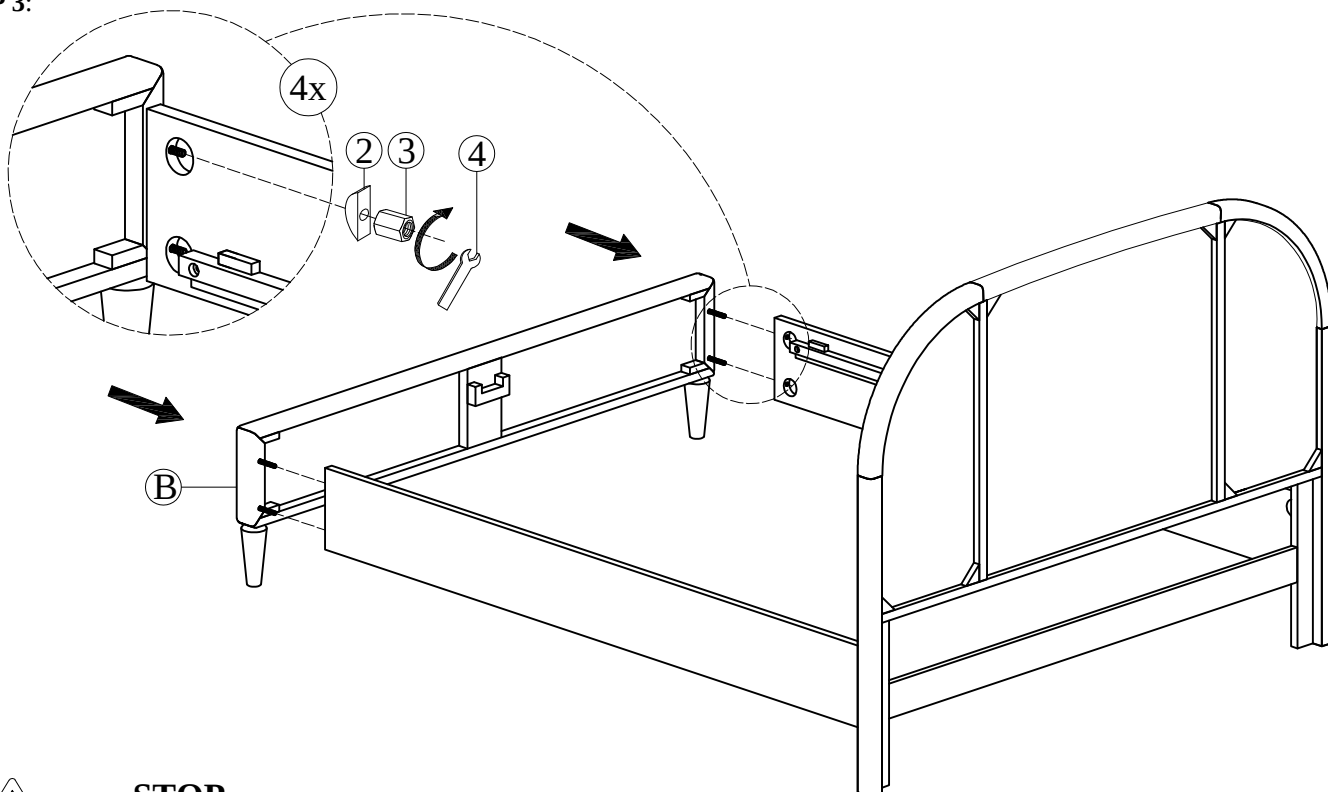

STOP


- IF USING BED WITH AN ADJUSTABLE MATTRESS BASE, SKIP STEPS 4, 5, 6 & 7 AND REFERENCE APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT.
- IF USING BED FRAME WITH STANDARD BOX SPRING OR FOUNDATION, CONTINUE TO STEP 4

LANGLEY WOOD QUEEN BED


ASSEMBLY INSTRUCTIONS



STEP 4:

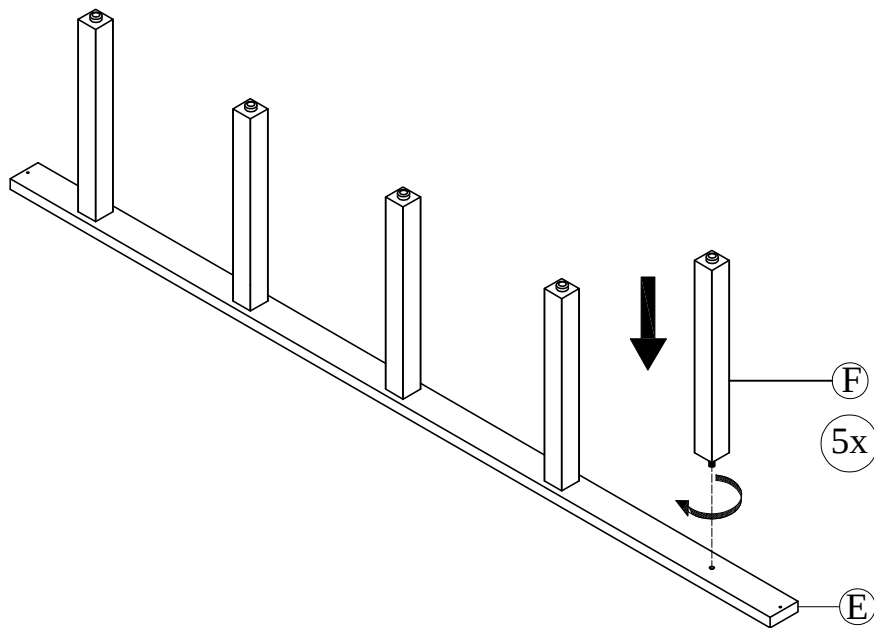

STEP 5:

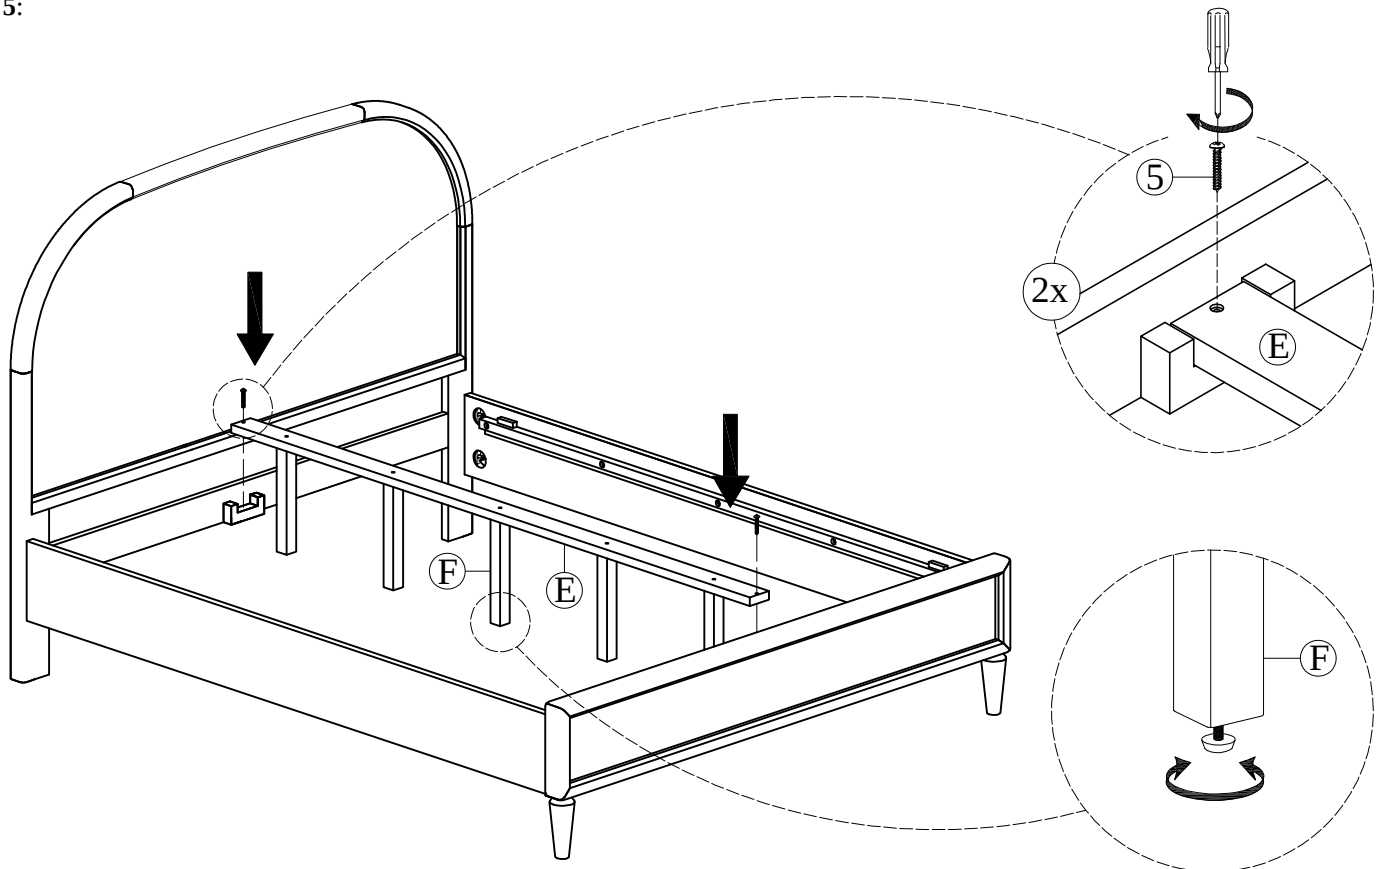


LANGLEY WOOD QUEEN BED


ASSEMBLY INSTRUCTIONS



STEP 6:

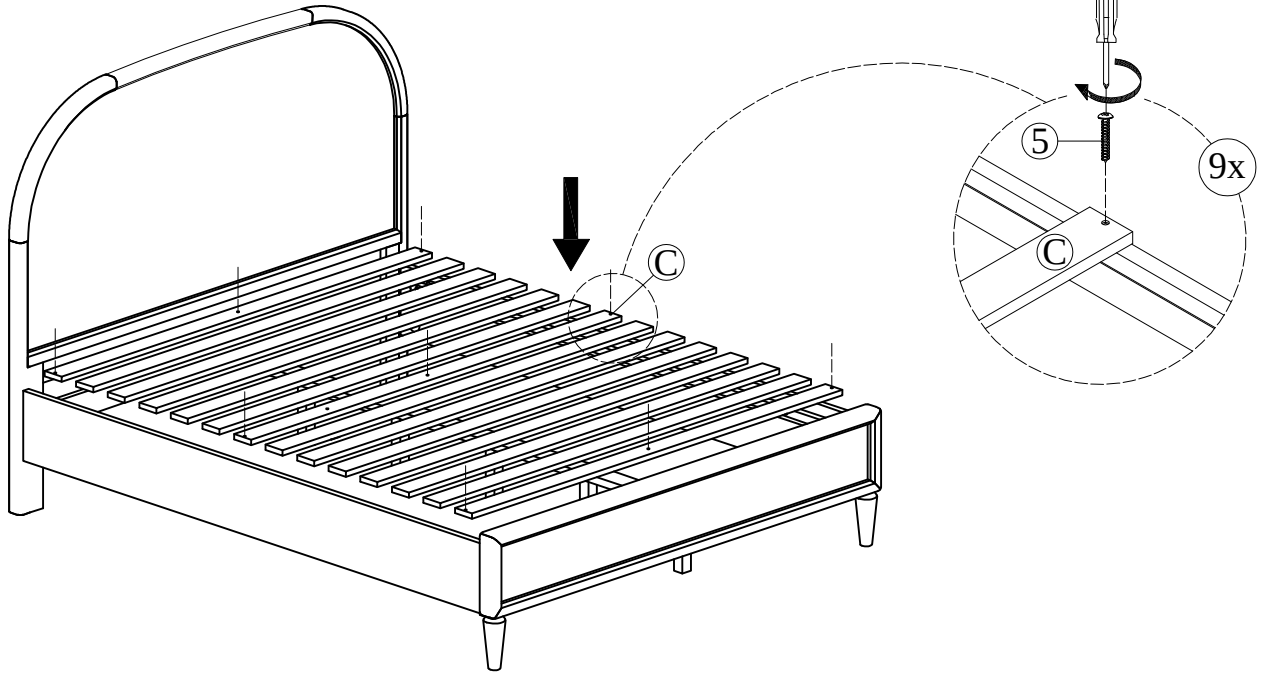

STEP 7:

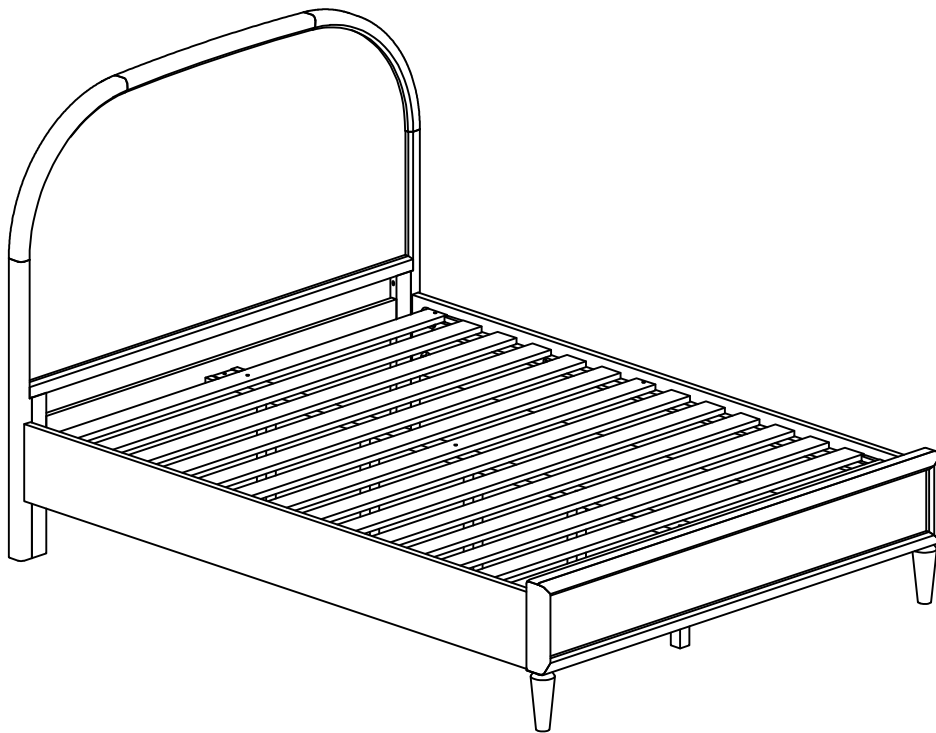


ASSEMBLY COMPLETE

INSTRUCTIONS FOR ADJUSTING LEVELERS:

Position the bed in your space and locate the leveler under each support leg.

Turn the leveler counter-clockwise to extend the leveler and clockwise to retract it.

Adjust each leveler until each support leg is applying equal, upward pressure on the support slat.



MAINTENANCE INSTRUCTIONS:

- Periodically check all fittings and tighten if necessary, as they can loosen over time.
- Always remove box spring and mattress before moving the bed.
- Lift the bed when moving it. Dragging the bed can damage the center support.
- Readjust levelers after moving the bed.

LANGLEY WOOD QUEEN BED

ASSEMBLY INSTRUCTIONS



APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT

AN ADJUSTABLE MATTRESS BASE IS A FREESTANDING MATTRESS SUPPORT THAT SITS WITHIN THE PERIMETER OF THE BED FRAME.

IF USING THIS BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION THESE INSTRUCTIONS DO NOT APPLY.


PRE-ASSEMBLED SIDE RAIL CLEATS OBSTRUCT ADJUSTABLE BASE INSTALLATION AND OPERATION. FOLLOW THESE INSTRUCTIONS TO REMOVE THEM.

THE FOLLOWING PARTS ARE NOT REQUIRED FOR ADJUSTABLE MATTRESS BASE INSTALLATION:

C. SLAT ROLL	:1 SET	5. WOOD SCREW (4x30mm)	:11 PCS
E. CENTER SUPPORT	:1 PC		
F. SUPPORT LEG	:5 PCS		

STEP 1:

USE ALLEN KEY (6) IN BOX #2 TO UNSCREW ALLEN BOLTS AND REMOVE PRE-ASSEMBLED SIDE RAIL CLEATS.

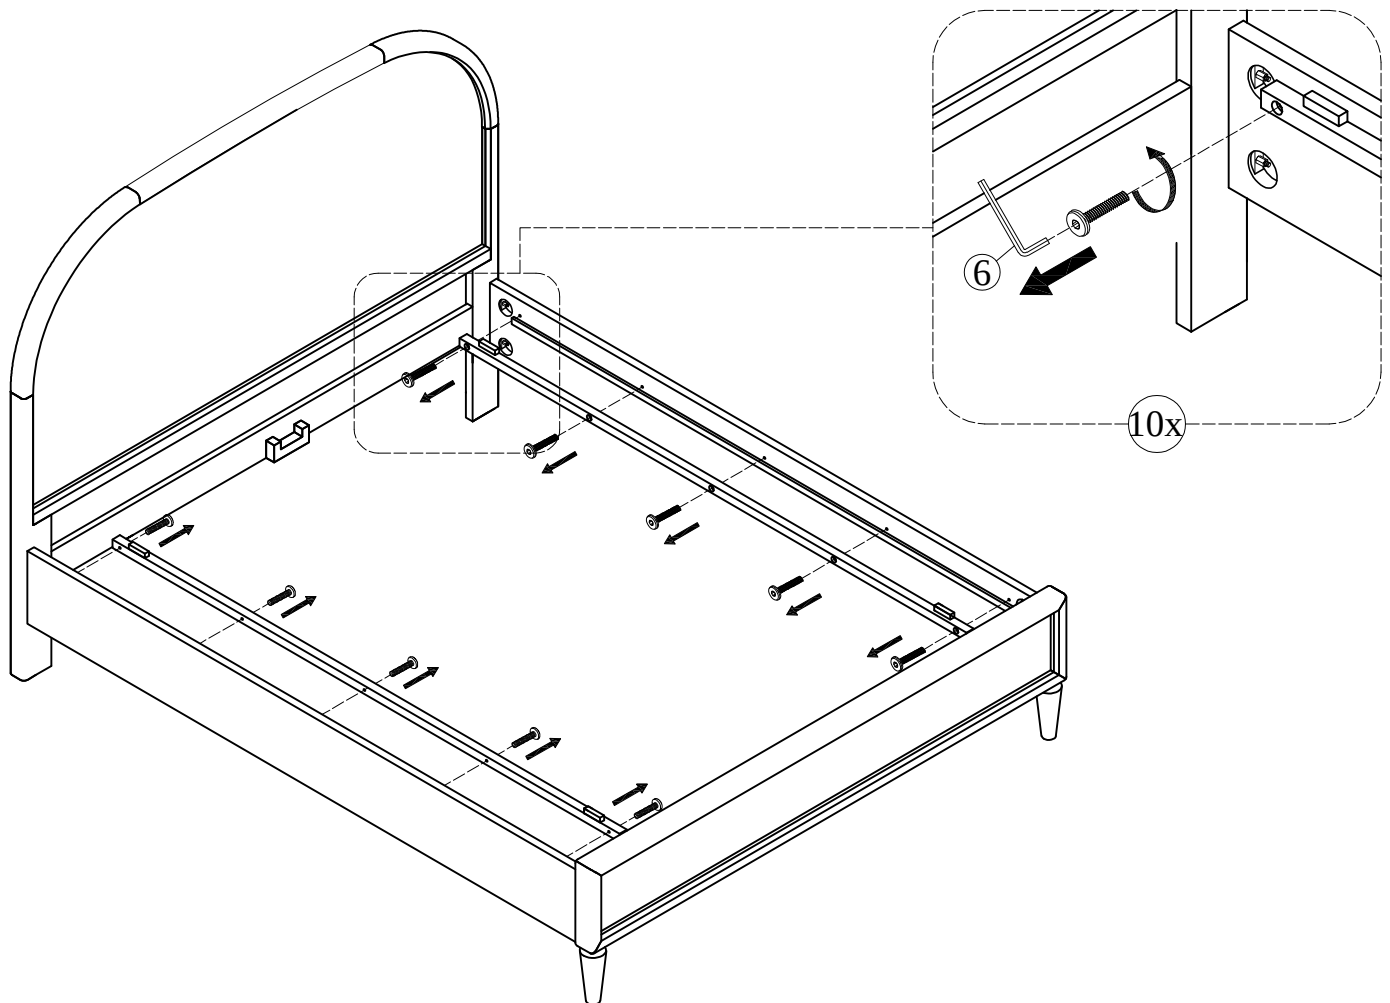

NOTE: YOU MAY WISH TO RETAIN UNUSED PARTS IF IN THE FUTURE YOU INTEND TO USE THE BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION.

LANGLEY WOOD KING BED


ASSEMBLY INSTRUCTIONS



PARTS PACKING CONFIGURATIONS


BOX #1:
A. HEADBOARD

1 PC

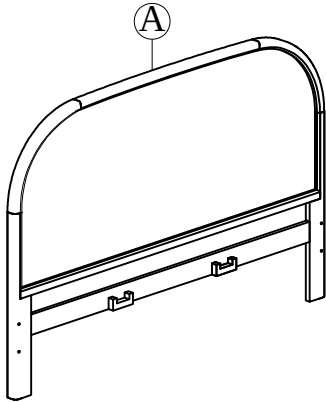


BOX #2:
B. FOOTBOARD
C. SLAT ROLL

1 PC
1 SET

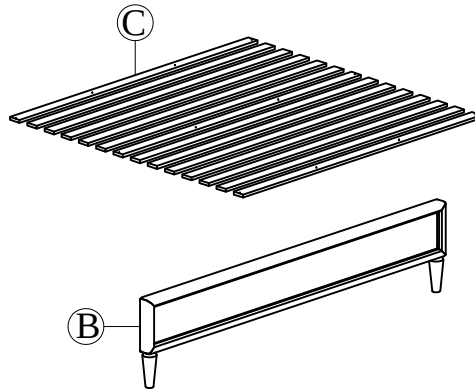


BOX #3:
D. SIDE RAILS
E. CENTER SUPPORT
F. SUPPORT LEG

2 PCS
2 PCS
10 PCS

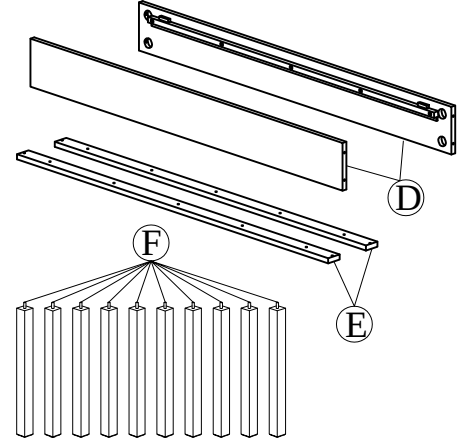

FULLY ASSEMBLED

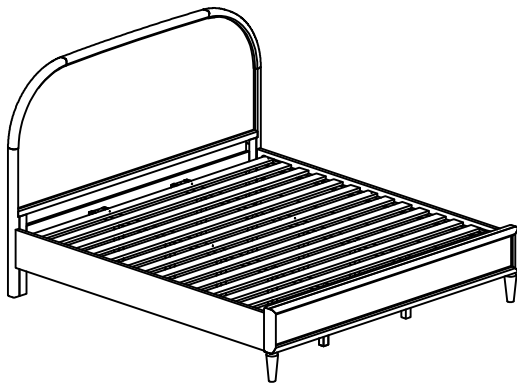


Not provided

HARDWARE KIT PACKED IN BOX #2

No.	Description	Image	Quantity
1	THREADED BOLT (8x90mm)		8 PCS
2	HALF MOON WASHER (7x14x27mm)		8 PCS
3	HEX NUT (M8)		8 PCS
4	WRENCH (13mm)		1 PC
5	WOOD SCREW (4x30mm)		16 PCS
6	ALLEN KEY (4mm)		1 PC

STEP 1:

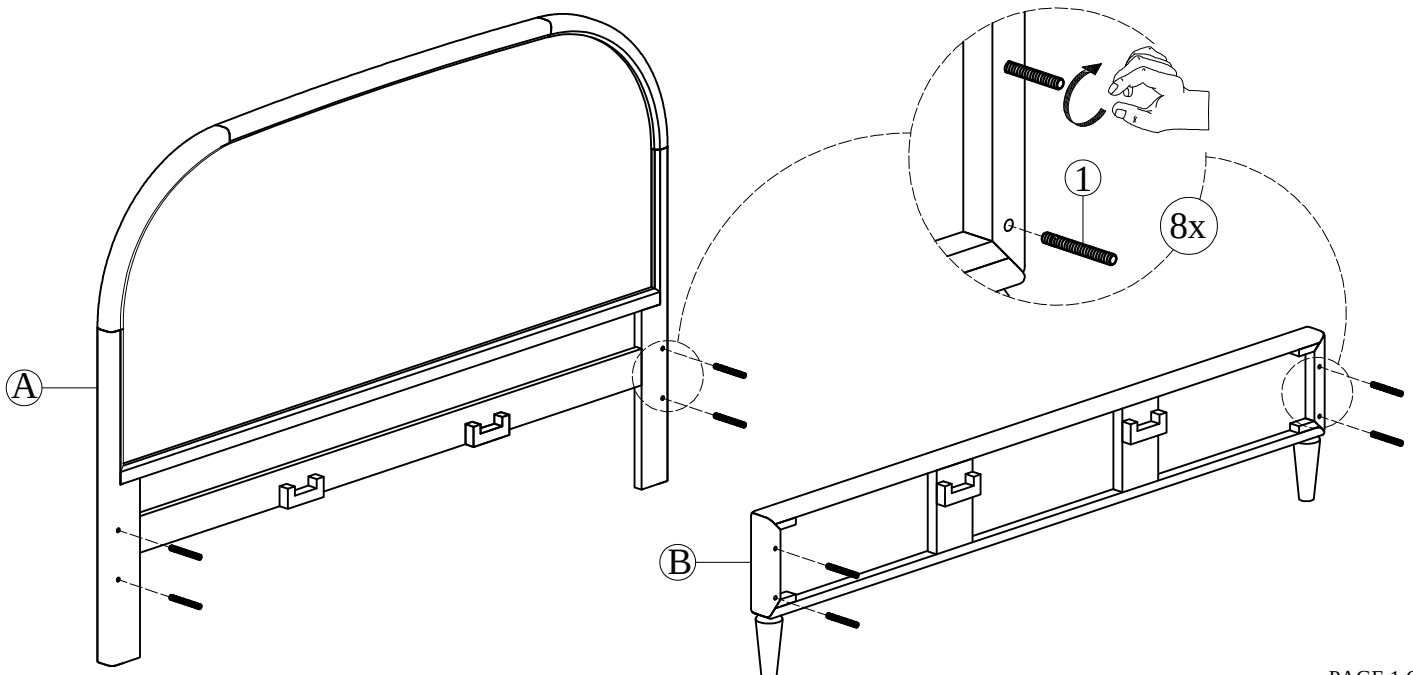


LANGLEY WOOD KING BED


ASSEMBLY INSTRUCTIONS



STEP 2:

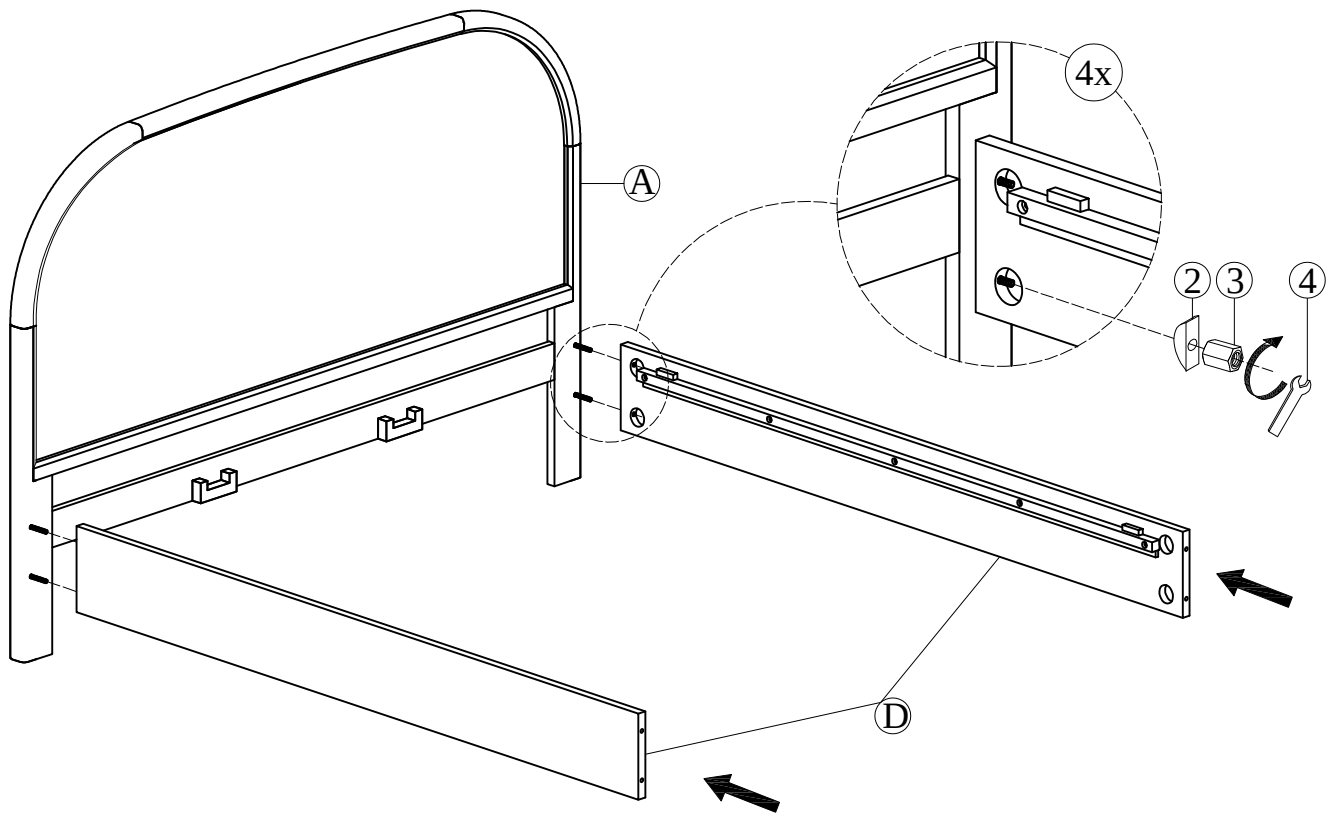

STEP 3:

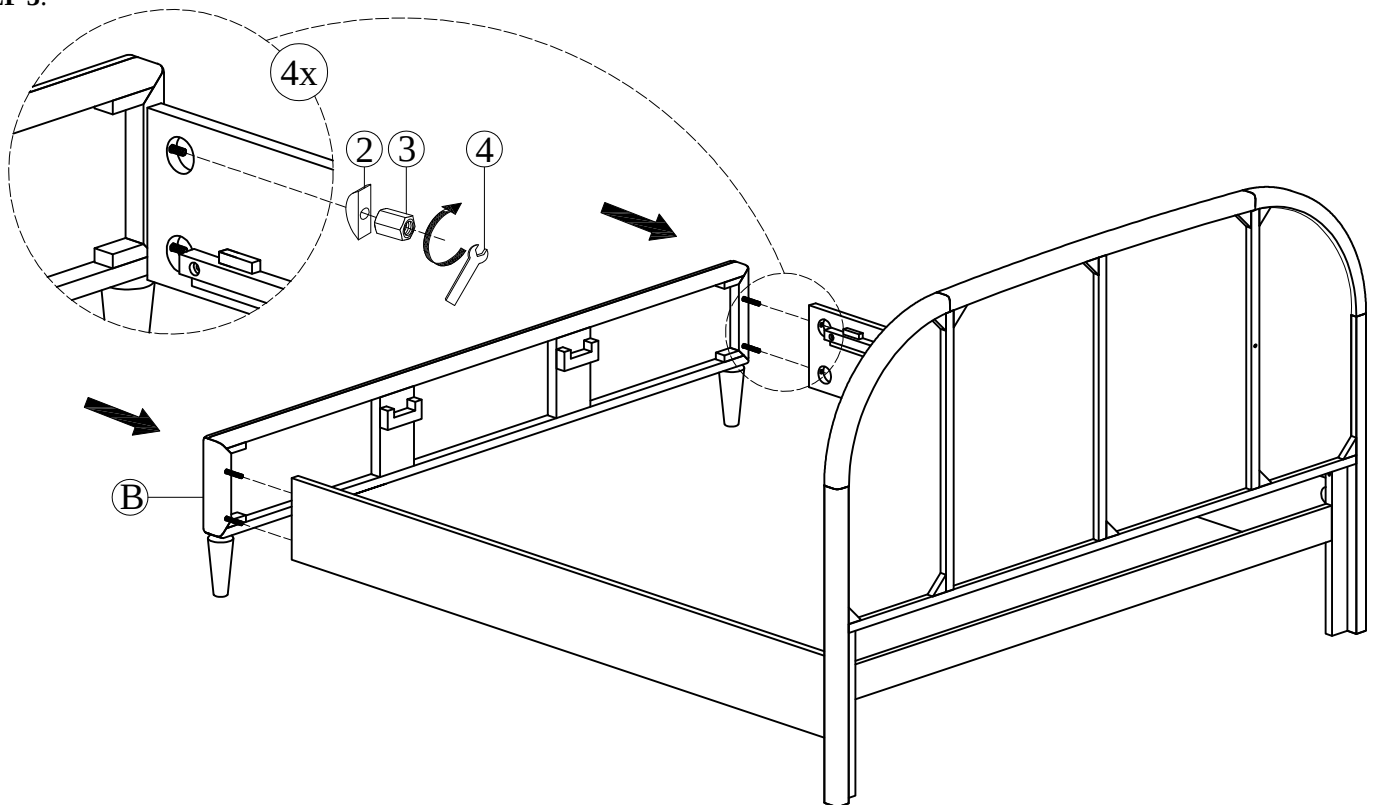

STOP


- IF USING BED WITH AN ADJUSTABLE MATTRESS BASE, SKIP STEPS 4, 5, 6 & 7 AND REFERENCE APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT.
- IF USING BED FRAME WITH STANDARD BOX SPRING OR FOUNDATION, CONTINUE TO STEP 4

LANGLEY WOOD KING BED


ASSEMBLY INSTRUCTIONS



STEP 4:

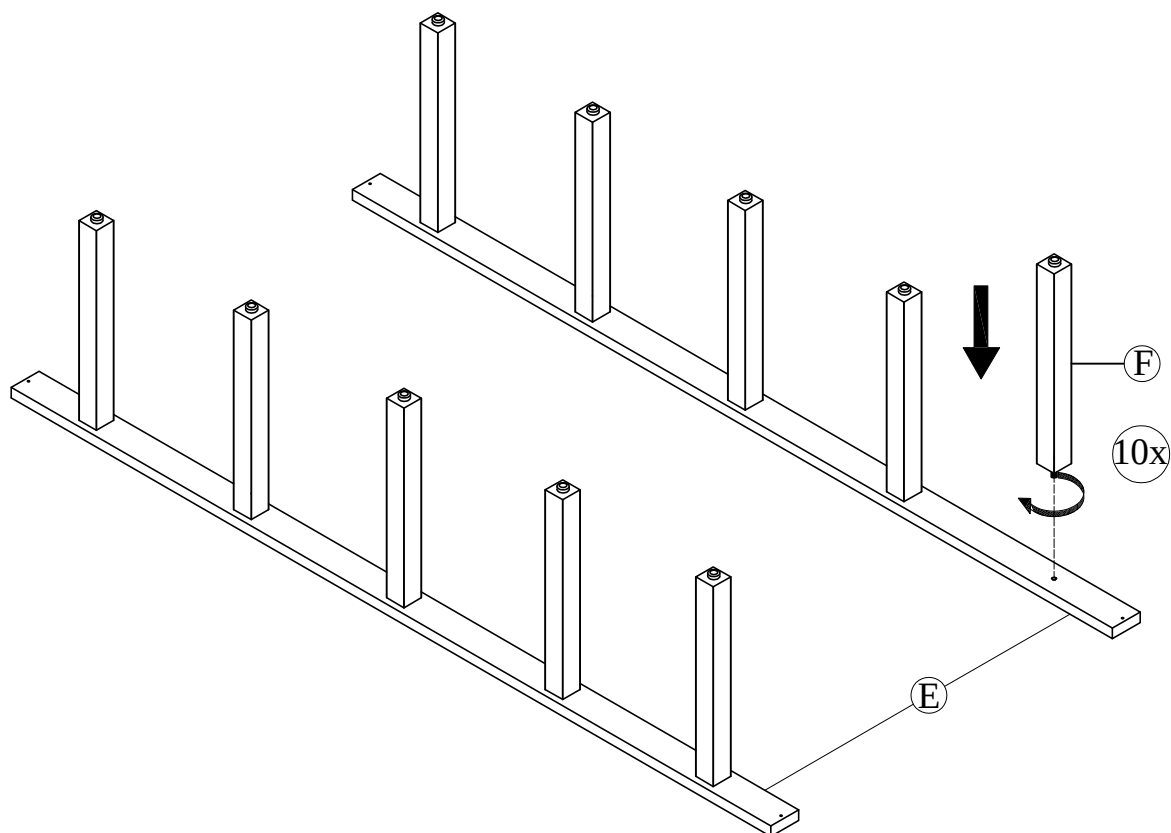

STEP 5:

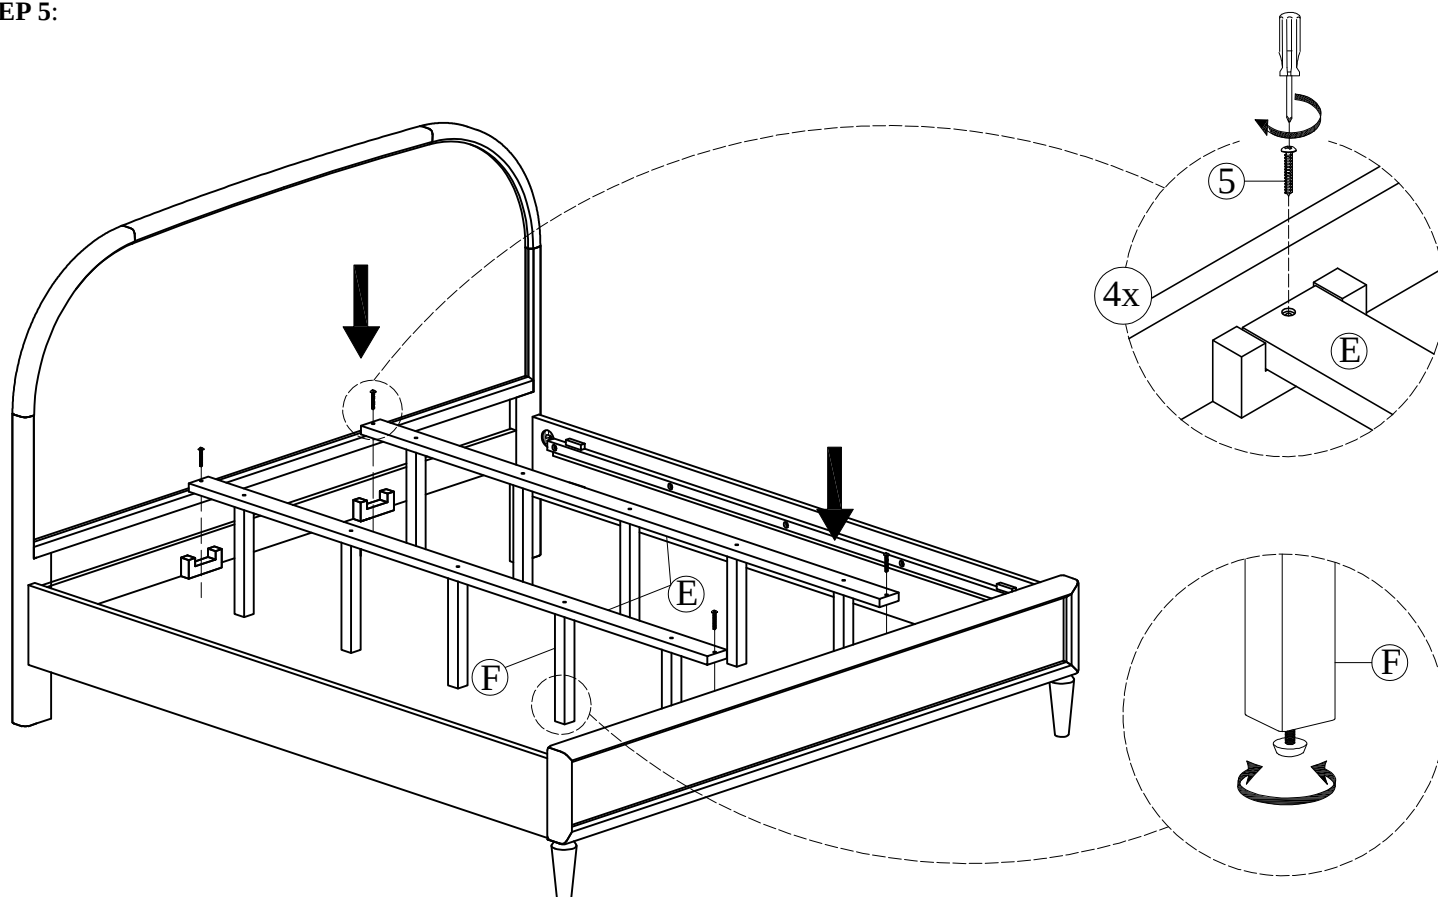


LANGLEY WOOD KING BED


ASSEMBLY INSTRUCTIONS



STEP 6:

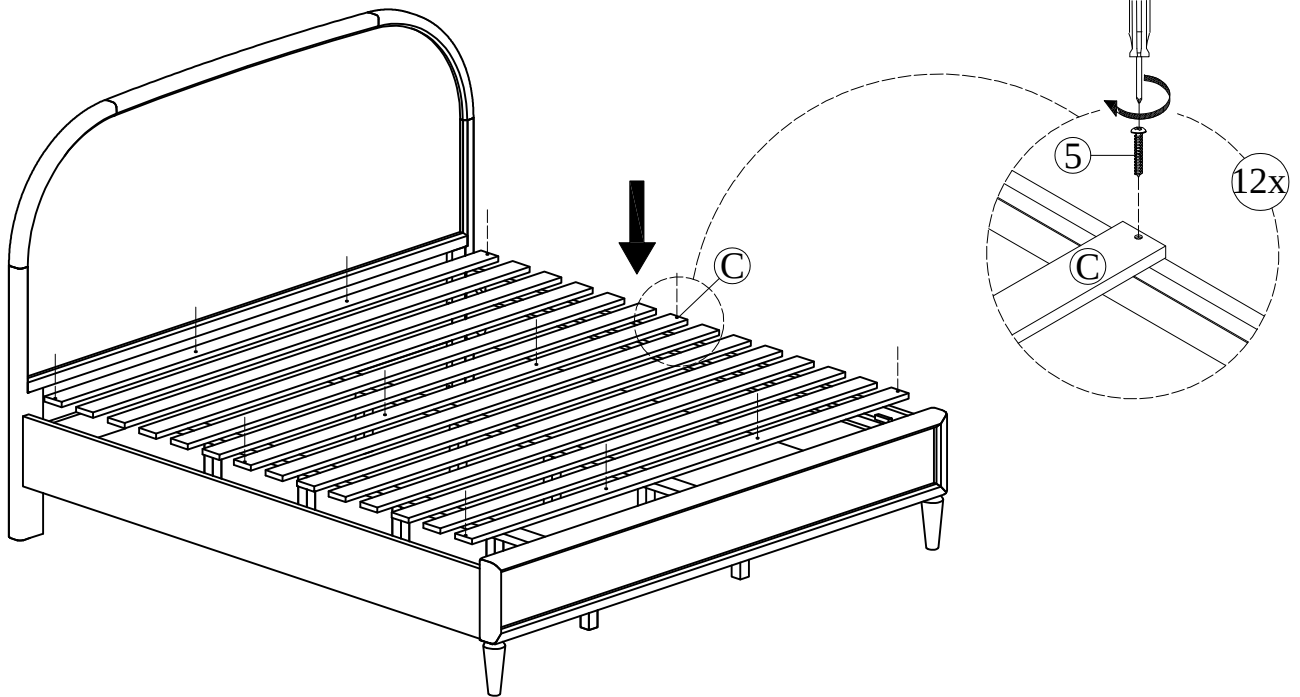

STEP 7:

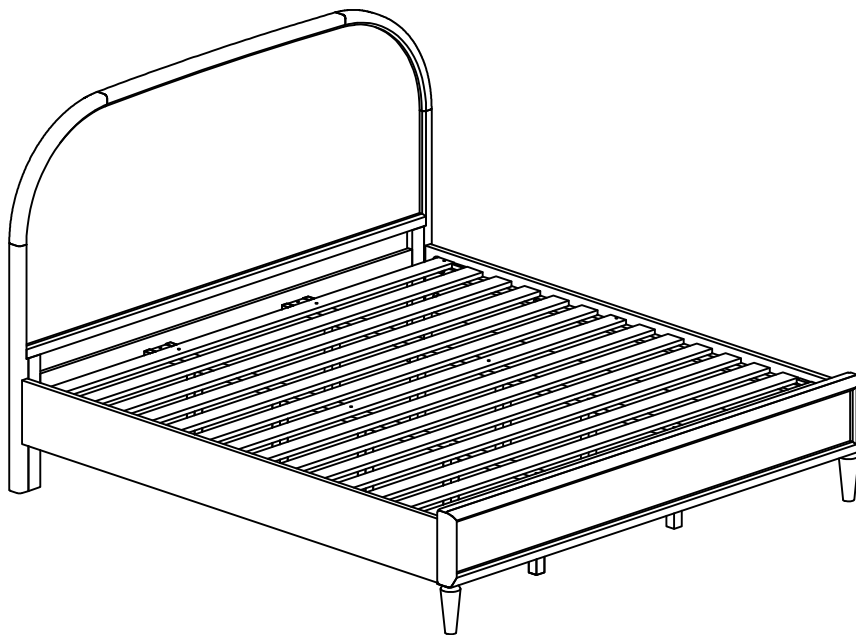


ASSEMBLY COMPLETE

INSTRUCTIONS FOR ADJUSTING LEVELERS:

Position the bed in your space and locate the leveler under each support leg.

Turn the leveler counter-clockwise to extend the leveler and clockwise to retract it.

Adjust each leveler until each support leg is applying equal, upward pressure on the support slat.



MAINTENANCE INSTRUCTIONS:

- Periodically check all fittings and tighten if necessary, as they can loosen over time.
- Always remove box spring and mattress before moving the bed.
- Lift the bed when moving it. Dragging the bed can damage the center support.
- Readjust levelers after moving the bed.

LANGLEY WOOD KING BED

ASSEMBLY INSTRUCTIONS



APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT

AN ADJUSTABLE MATTRESS BASE IS A FREESTANDING MATTRESS SUPPORT THAT SITS WITHIN THE PERIMETER OF THE BED FRAME.

IF USING THIS BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION THESE INSTRUCTIONS DO NOT APPLY.


PRE-ASSEMBLED SIDE RAIL CLEATS OBSTRUCT ADJUSTABLE BASE INSTALLATION AND OPERATION. FOLLOW THESE INSTRUCTIONS TO REMOVE THEM.

THE FOLLOWING PARTS ARE NOT REQUIRED FOR ADJUSTABLE MATTRESS BASE INSTALLATION:

C. SLAT ROLL	:1 SET	5. WOOD SCREW (4x30mm)	:16 PCS
E. CENTER SUPPORT	:2 PCS		
F. SUPPORT LEG	:10 PCS		

STEP 1:

USE ALLEN KEY (6) IN BOX #2 TO UNSCREW ALLEN BOLTS AND REMOVE PRE-ASSEMBLED SIDE RAIL CLEATS.

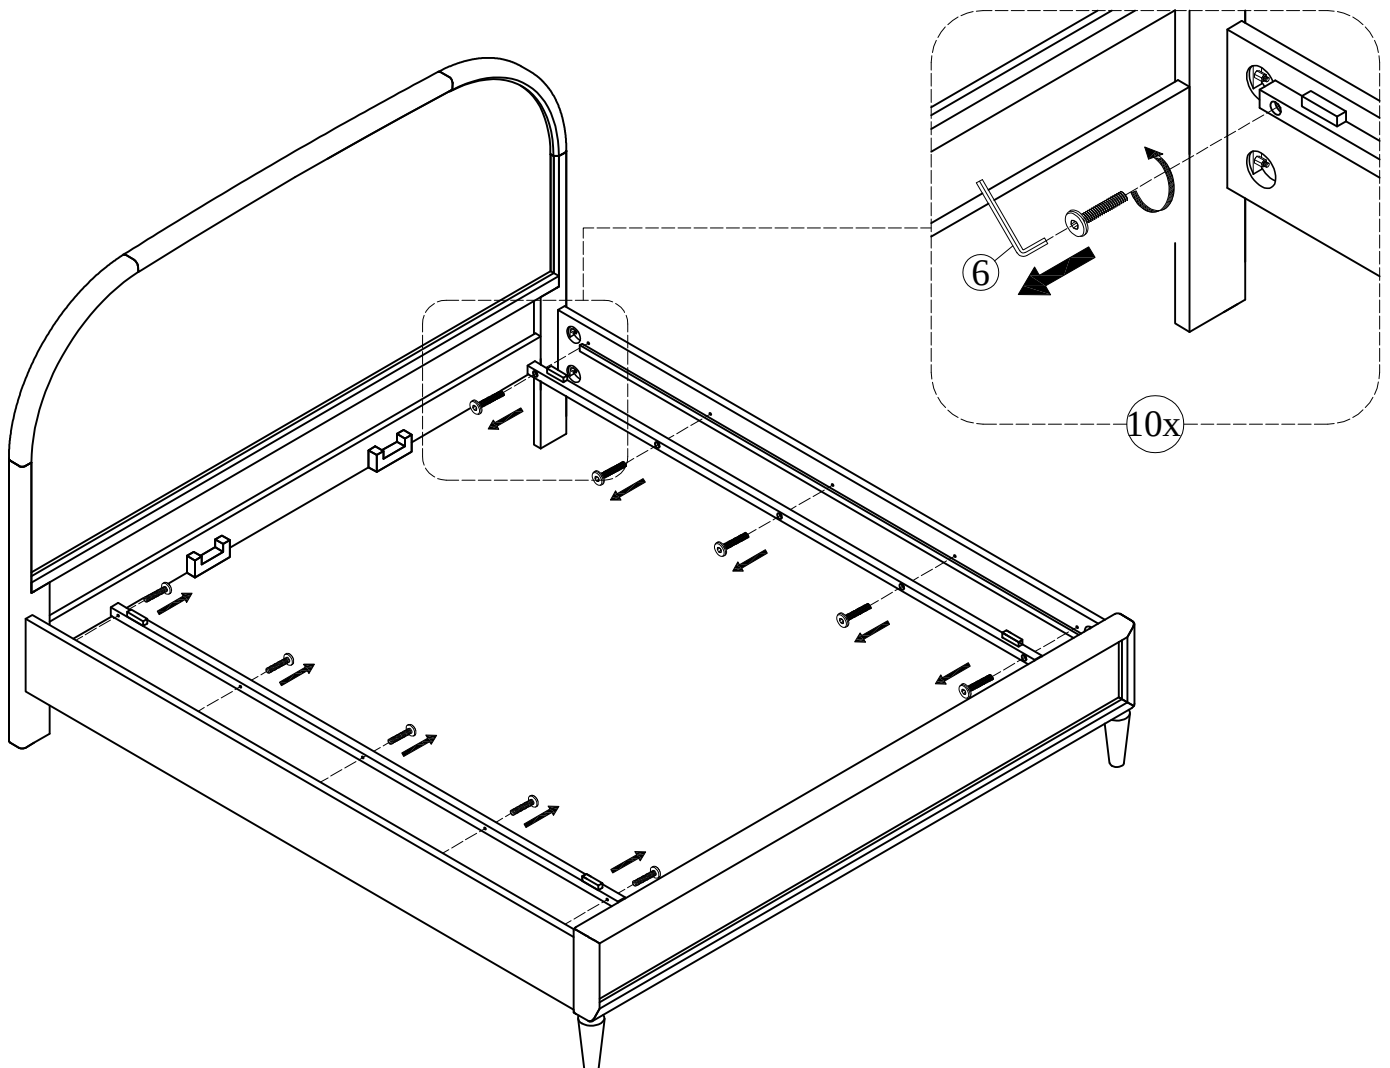

NOTE: YOU MAY WISH TO RETAIN UNUSED PARTS IF IN THE FUTURE YOU INTEND TO USE THE BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION.

LANGLEY WOOD C.KING BED


ASSEMBLY INSTRUCTIONS



PARTS PACKING CONFIGURATIONS


BOX #1:
A. HEADBOARD

1 PC

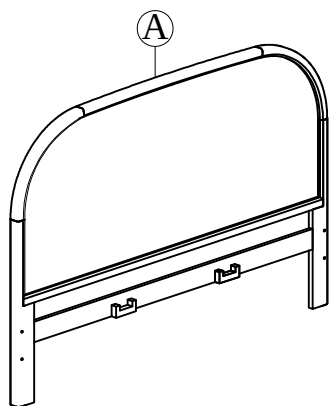


BOX #2:
B. FOOTBOARD
C. SLAT ROLL

1 PC
1 SET

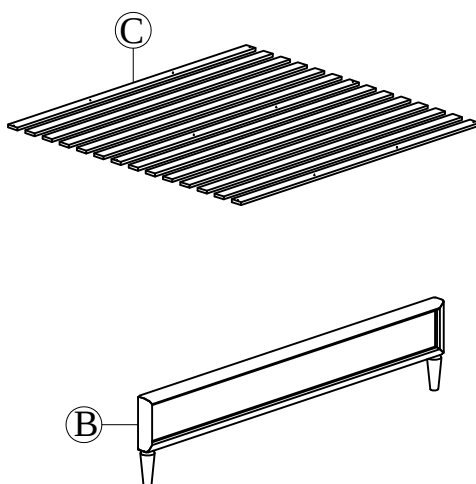


BOX #3:
D. SIDE RAILS
E. CENTER SUPPORT
F. SUPPORT LEG
G. MATTRESS SPACER

2 PCS
2 PCS
10 PCS
2 PCS

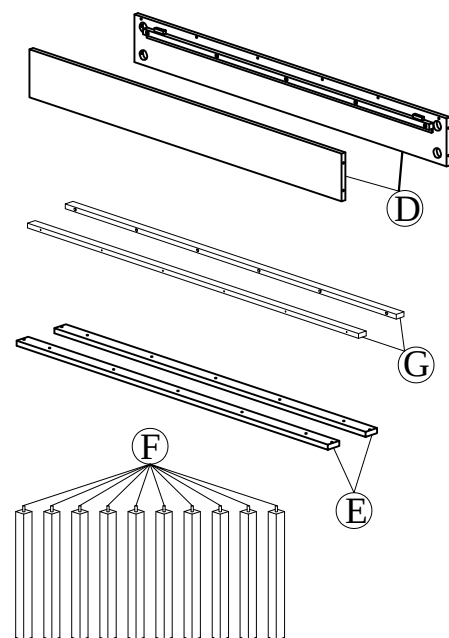

FULLY ASSEMBLED

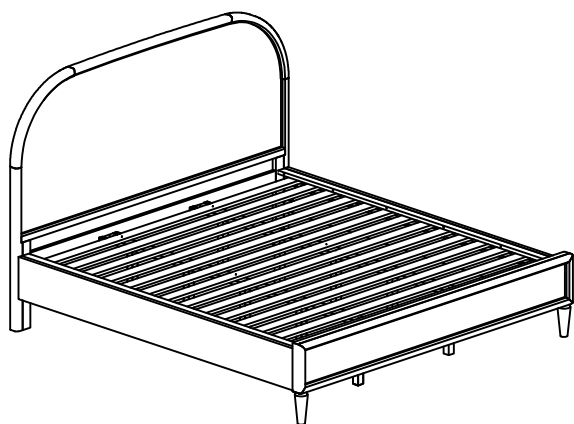

HARDWARE KIT PACKED IN BOX #2

No.	Description	Image	Quantity
1	THREADED BOLT (8x90mm)		8 PCS
2	HALF MOON WASHER (7x14x27mm)		8 PCS
3	HEX NUT (M8)		8 PCS
4	WRENCH (13mm)		1 PC
5	WOOD SCREW (4x30mm)		16 PCS
6	ALLEN KEY (4mm)		1 PC

HARDWARE KIT PACKED IN BOX #3

No.	Description	Image	Quantity
6	ALLEN KEY (4mm)		1 PC
7	ALLEN BOLT (6x60mm)		12 PCS
8	SPRING WASHER (M6)		12 PCS
9	FLAT WASHER (M6)		12 PCS



Not provided


LANGLEY WOOD C.KING BED

ASSEMBLY INSTRUCTIONS




STEP 1:

NOTE: USE HARDWARE PACKED IN BOX #2 FOR STEPS 1, 2, 3, 5 & 6

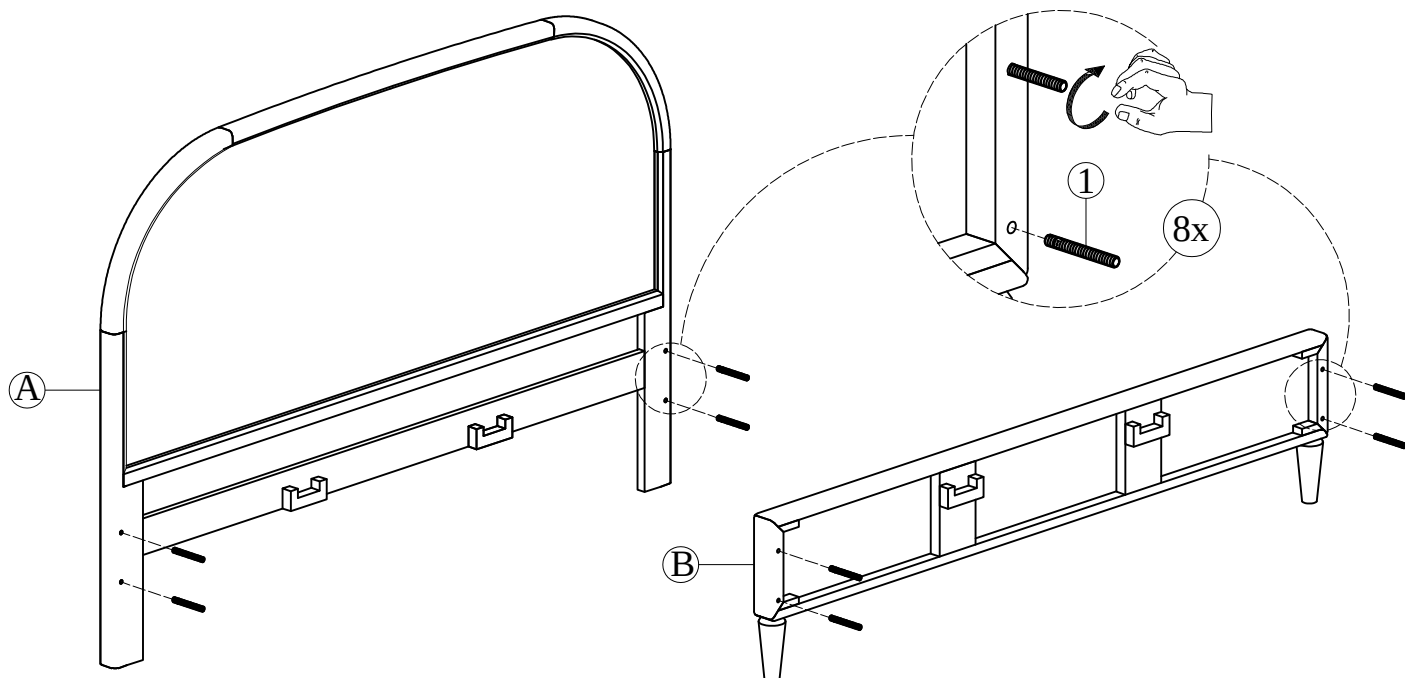

STEP 2:

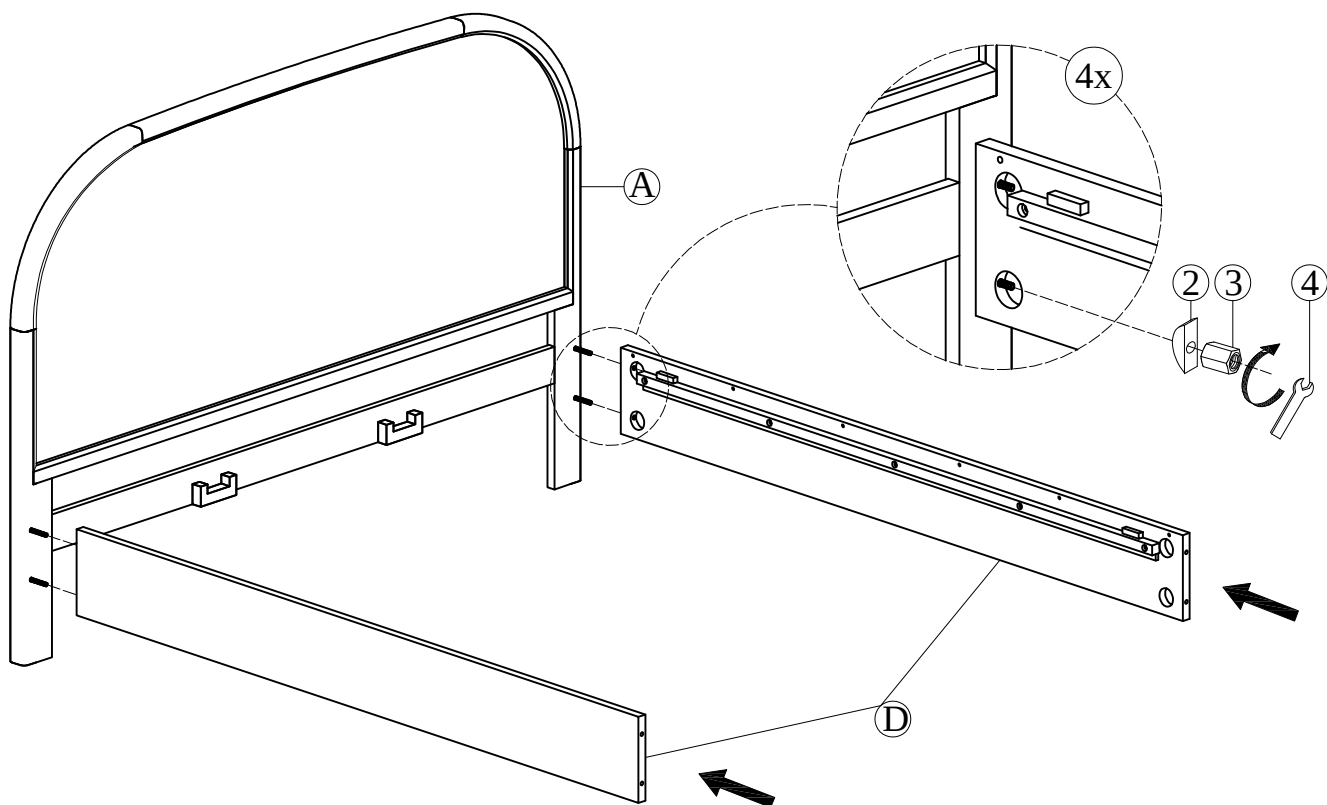


LANGLEY WOOD C.KING BED

ASSEMBLY INSTRUCTIONS




STEP 3:

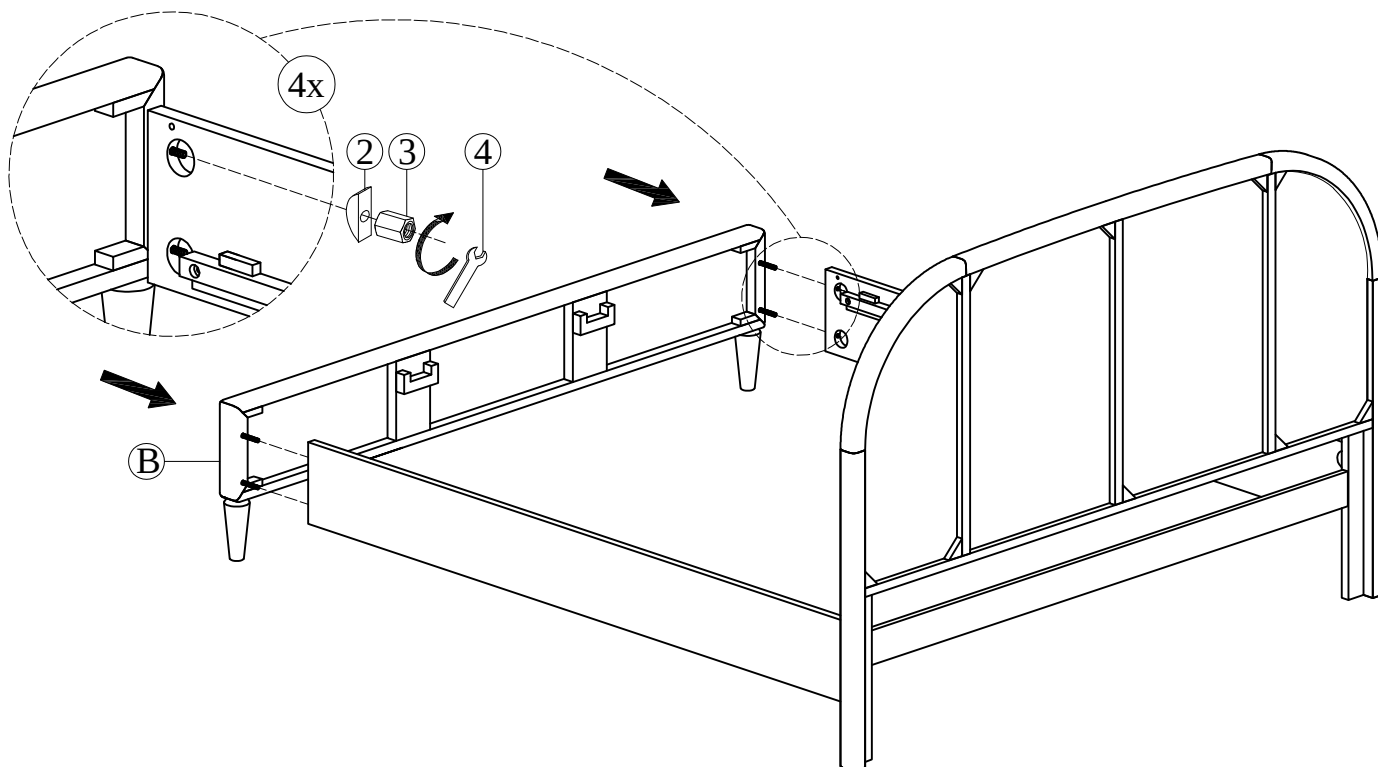

STOP

- IF USING BED WITH AN ADJUSTABLE MATTRESS BASE, SKIP STEPS 4, 5, 6, 7 & 8 AND REFERENCE APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT.
- IF USING BED FRAME WITH STANDARD BOX SPRING OR FOUNDATION, CONTINUE TO STEP 4

STEP 4:

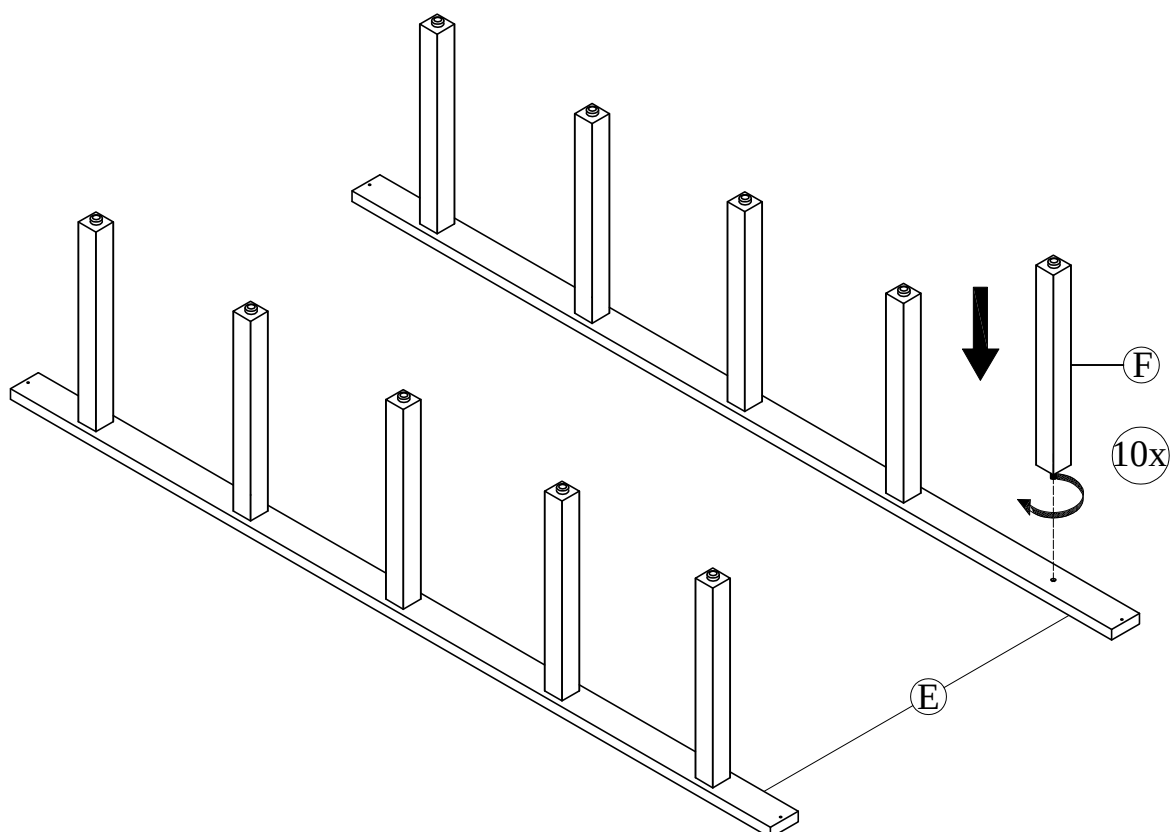


LANGLEY WOOD C.KING BED


ASSEMBLY INSTRUCTIONS



STEP 5:

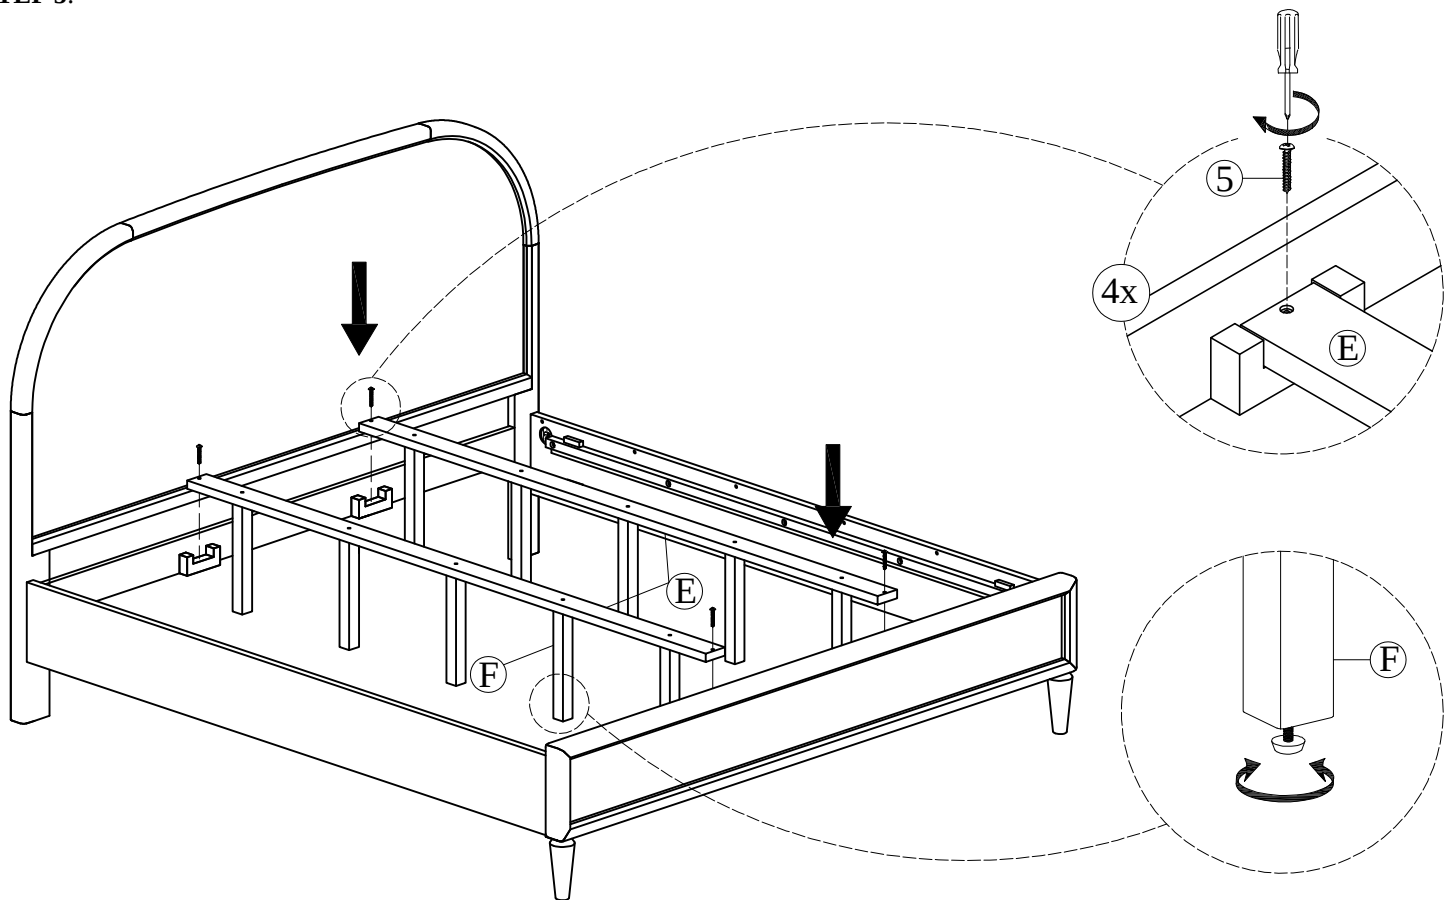

STEP 6:

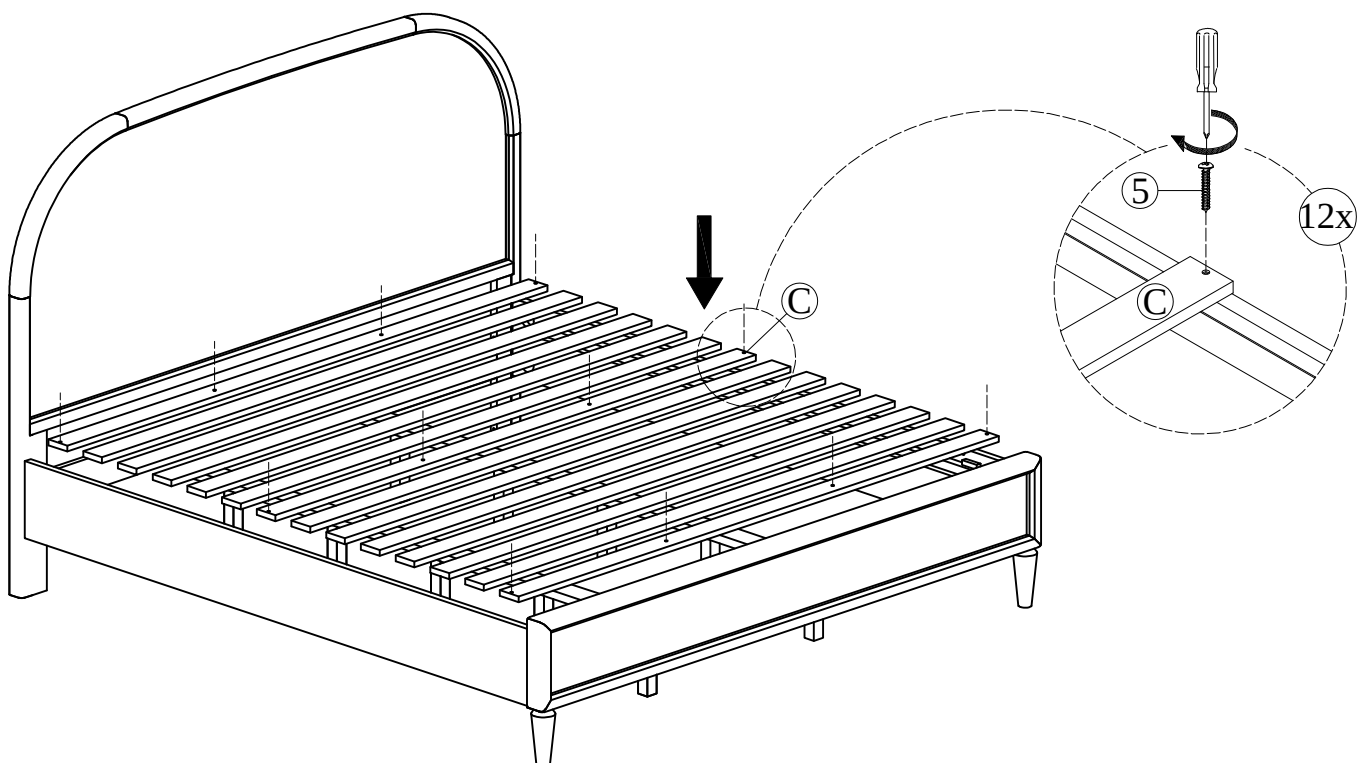


LANGLEY WOOD C.KING BED


ASSEMBLY INSTRUCTIONS



STEP 7:

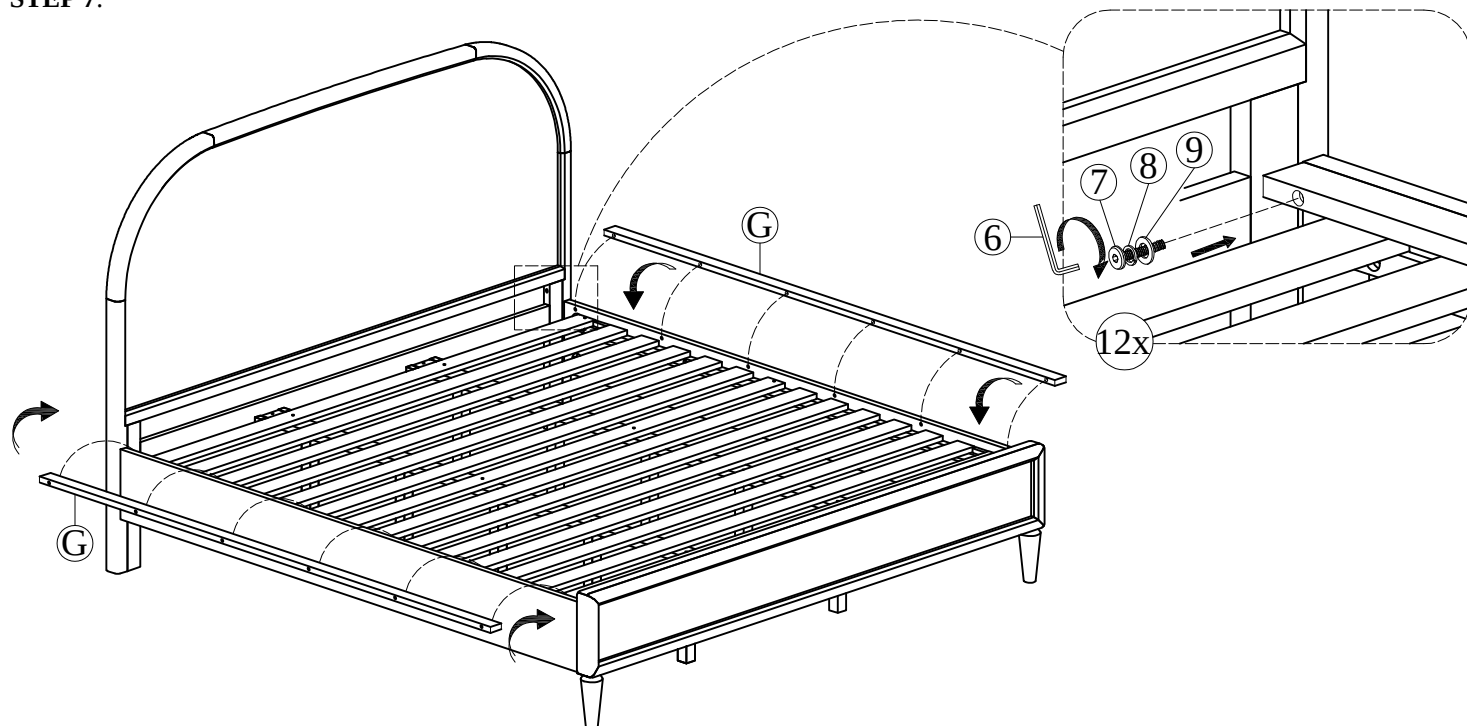

STEP 8:

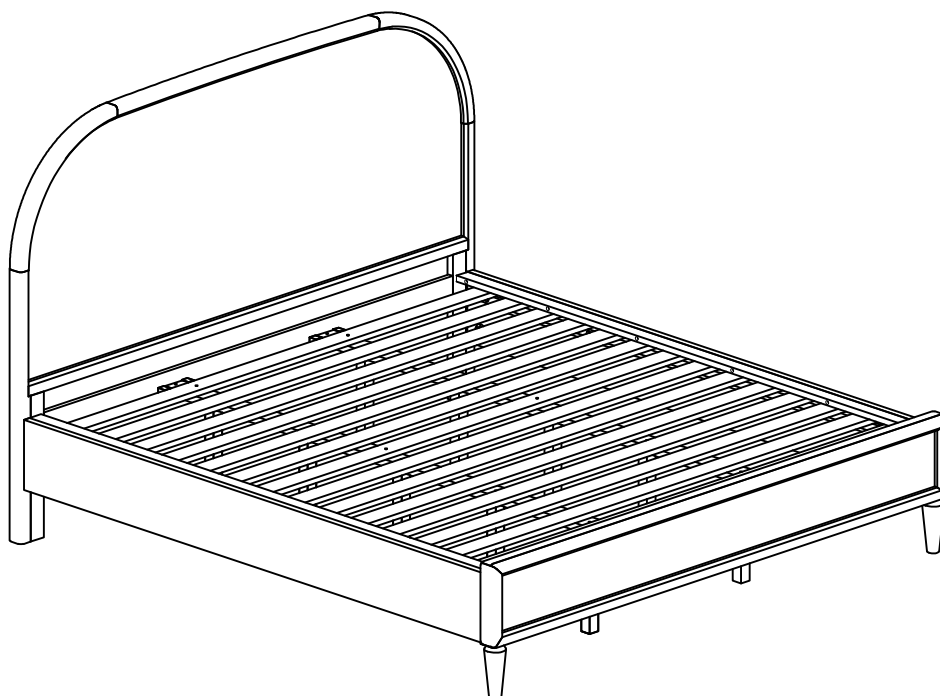


ASSEMBLY COMPLETE

INSTRUCTIONS FOR ADJUSTING LEVELERS:

Position the bed in your space and locate the leveler under each support leg.

Turn the leveler counter-clockwise to extend the leveler and clockwise to retract it.

Adjust each leveler until each support leg is applying equal, upward pressure on the support slat.



MAINTENANCE INSTRUCTIONS:

- Periodically check all fittings and tighten if necessary, as they can loosen over time.
- Always remove box spring and mattress before moving the bed.
- Lift the bed when moving it. Dragging the bed can damage the center support.
- Readjust levelers after moving the bed.

LANGLEY WOOD C.KING BED

ASSEMBLY INSTRUCTIONS

APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT



AN ADJUSTABLE MATTRESS BASE IS A FREESTANDING MATTRESS SUPPORT THAT SITS WITHIN THE PERIMETER OF THE BED FRAME.


IF USING THIS BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION THESE INSTRUCTIONS DO NOT APPLY.

PRE-ASSEMBLED SIDE RAIL CLEATS OBSTRUCT ADJUSTABLE BASE INSTALLATION AND OPERATION. FOLLOW THESE INSTRUCTIONS TO REMOVE THEM.

THE FOLLOWING PARTS ARE NOT REQUIRED FOR ADJUSTABLE MATTRESS BASE INSTALLATION:

C. SLAT ROLL	:1 SET	5. WOOD SCREW (4x30mm)	:16 PCS
E. CENTER SUPPORT	:2 PCS	7. ALLEN BOLT (6x60mm)	:12 PCS
F. SUPPORT LEG	:10 PCS	8. SPRING WASHER (M6)	:12 PCS
G. MATTRESS SPACER	:2 PCS	9. FLAT WASHER (M6)	:12 PCS

STEP 1:
USE ALLEN KEY (6) IN BOX #2 OR #3 TO UNSCREW ALLEN BOLTS AND REMOVE PRE-ASSEMBLED SIDE RAIL CLEATS.

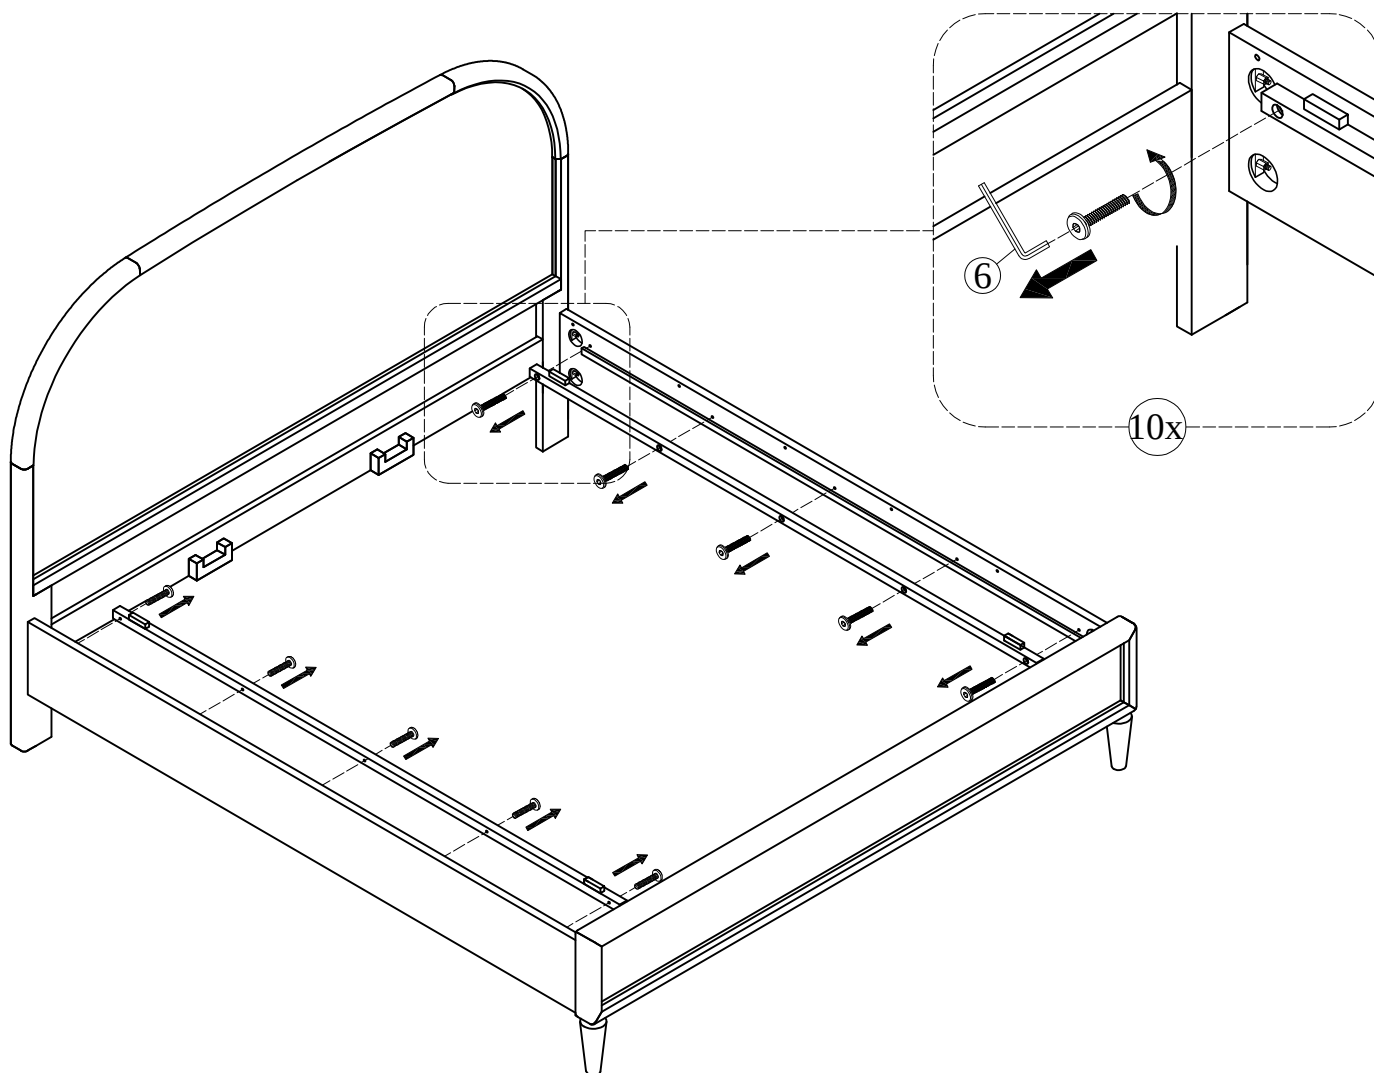

NOTE: YOU MAY WISH TO RETAIN UNUSED PARTS IF IN THE FUTURE YOU INTEND TO USE THE BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION.