
SYMMONS® Dia®



3593BTRM
Hand Shower Trim
Specification Submittal

Location:

Model Numbers

☐ **3593BTRM**
Hand Shower Trim

Valve Options:
- 261 Series Temptrol® Shower Valve with TRM modifier.
- 161 Series Temptrol Shower Valve requires TC modifier.

Feature Highlights

- Dia Hand Shower Trim.
- Requires Temptrol Pressure-Balancing Shower Valve.
- Dual check valves for backflow protection.
- 30” slide bar.
- 60” flexible metal hose.
- 7-mode HydroMersion™ hand shower with Non-Positive Shutoff (NPSO).
- Standard 2.0 gpm (7.6 L/min) flow restrictors.
- Components made from metal and nonmetal materials plated in standard Polished Chrome finish.

Modifications

☐	**15** CG	1.5 gpm (5.7 L/min) flow restrictor
☐	**175**	1.75 gpm (6.6 L/min) flow restrictor
☐	**Delete Suffix B**	Chrome plastic escutcheon on valve with color graphics/indicators in place of standard brass escutcheon
☐	**L2**	Less hand shower (wand only)
☐	**L7**	Less handle
☐	**TC**	Test Cap Trim (includes TA-10™ & T-12A) *used with 161 Series Temptrol Valve*
☐	**BBZ**	Brushed Bronze finish
☐	**MB**	Matte Black finish
☐	**STN**	Satin Nickel finish
☐	**1L**	1-Inch Spindle Extension

Compliance

- ASME® A112.18.1/CSA® B125.1
- WaterSense® 1.5 gpm (5.7 L/min) 1.75 gpm (6.6 L/min) 2.0 gpm (7.6 L/min)
- Lever handle meets ADA requirements for operation

Warranty

Limited Lifetime - for residential installations.
10 Years - for commercial/industrial installations.
Refer to www.symmons.com/warranty for complete warranty information.

SKU Builder

Series	Finish	Modifier	Flow Rate	TRM (required)	TC	1L	Final SKU
3593B	STN		15	TRM			3593BSTN15TRM
3593	MB	L2		TRM	TC	1L	3593MBL2TRMTC1L


Notes: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

Architectural/Engineering Specification

Symmons Dia Hand Shower System _____ Includes Dia Shower Trim for the Temptrol® Pressure-Balancing Shower Valve. Features include dual check valves for backflow protection, 30” slide bar, in-line vacuum breaker, 60” flexible metal hose, 7-mode HydroMersion hand shower with NPSO, and standard 2.0 gpm (7.6 L/min) flow restrictor. Components made from metal and nonmetal materials plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 1.75 gpm (6.6 L/min), 2.0 gpm (7.6 L/min) compliant. Lever handle meets ADA requirements for operation. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, 175 = 1.75 gpm (6.6 L/min) flow restrictor, Delete Suffix B = Chrome plastic escutcheon, TC = Test Cap Trim, L2 = Less hand shower (wand only), L7 = Less handle, BBZ = Brushed Bronze finish, MB = Matte Black finish, STN = Satin Nickel finish, and 1L = 1-Inch spindle extension.

Symmons Industries, Inc. ▪ 31 Brooks Drive ▪ Braintree, MA 02184 ▪ Phone: (800) 796-6667 ▪ Fax: (800) 961-9621
Copyright © 2026 Symmons Industries, Inc.

Dimensions

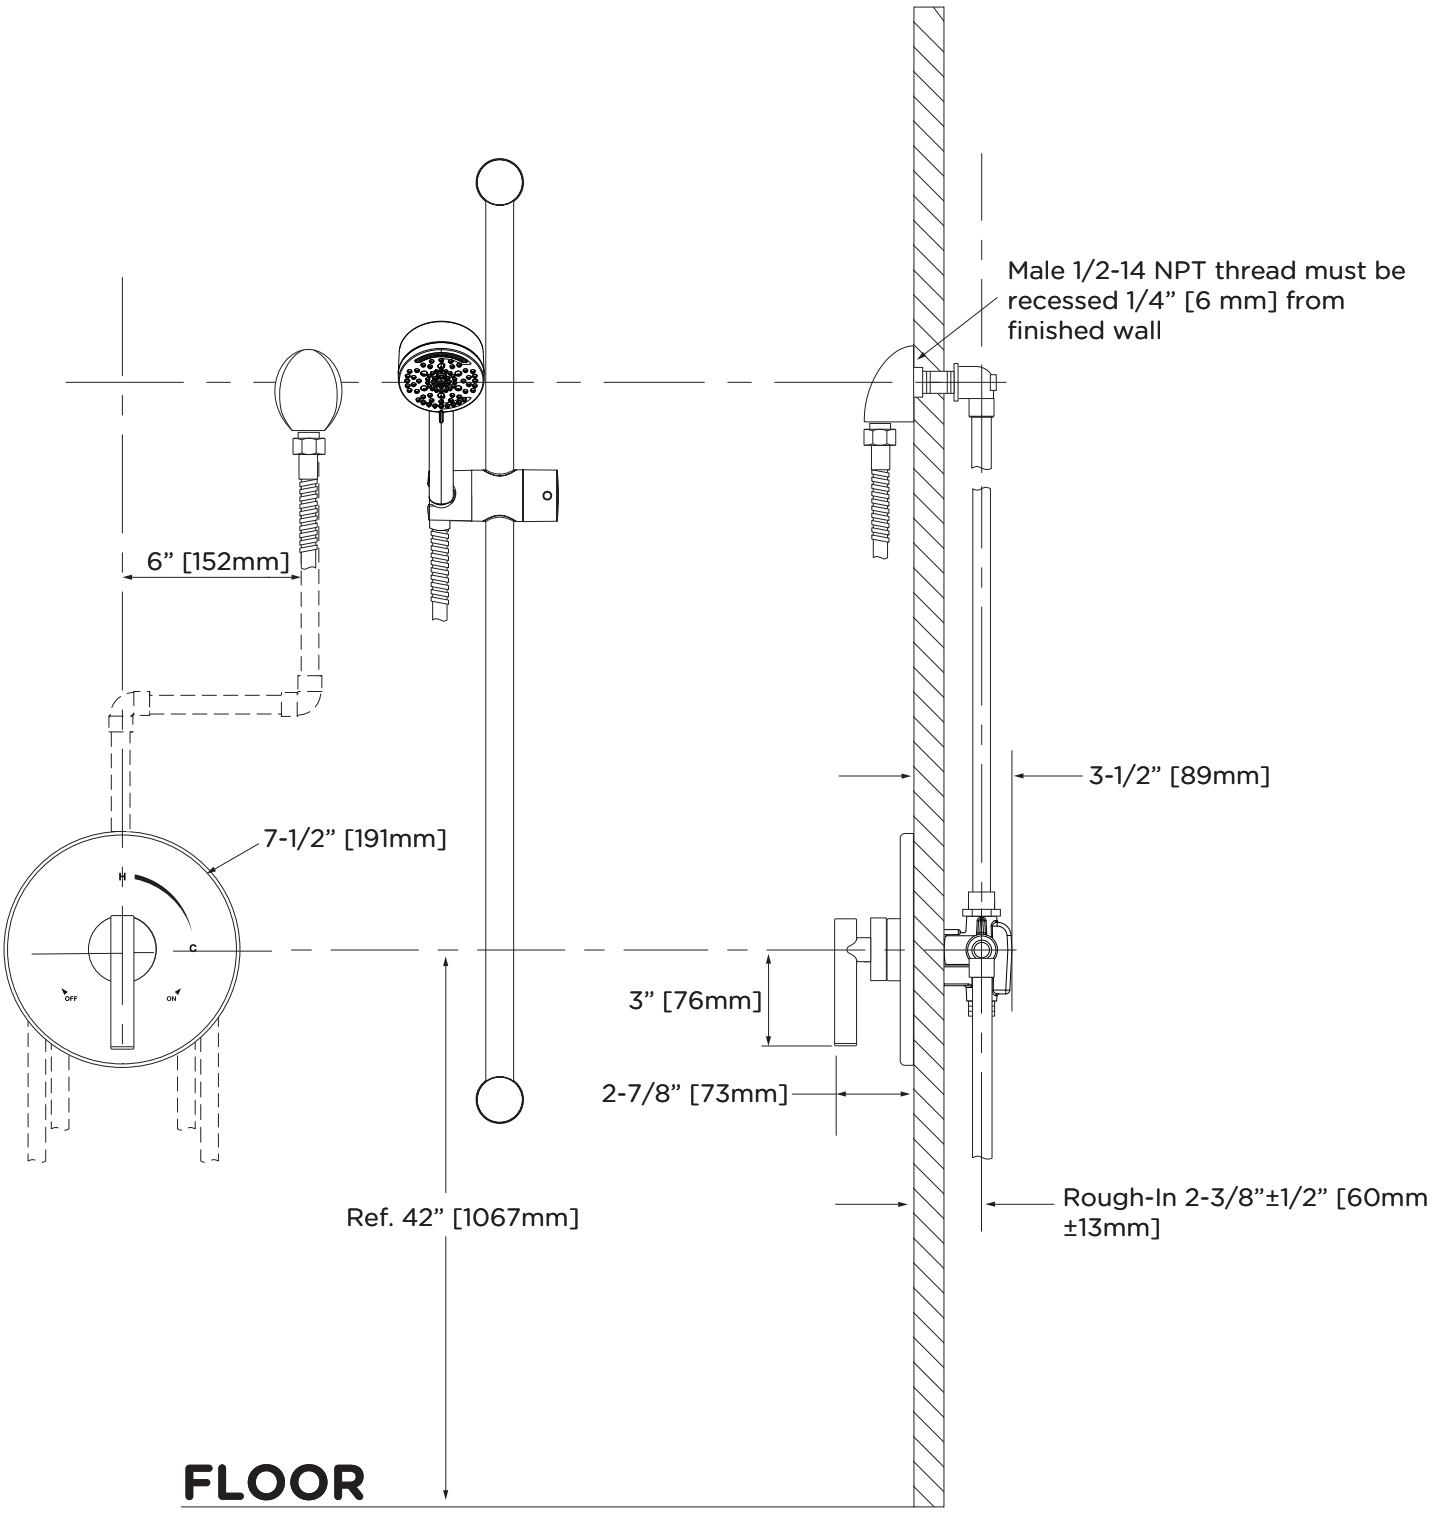

Notes:

1) Valve body and piping not included and shown as reference only.
2) Plaster shield (p/n T-176) from drywall, plaster, or other type walls 1/2” or greater.
3) All dimensions measured from nominal rough-in.
4) Dimensions are subject to change without notice.

Symmons Industries, Inc. ▪ 31 Brooks Drive ▪ Braintree, MA 02184 ▪ Phone: (800) 796-6667 ▪ Fax: (800) 961-9621
Copyright © 2026 Symmons Industries, Inc. ▪ symmons.com ▪ gethelp@symmons.com ▪ ZV-3955 REV B ▪ 083126