

Features


- Panel utilizes an integrated system of four 22-nozzle, fully adjustable sprayheads for stimulating hydrotherapy
- Low-profile design complements any decor
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 0.6 gpm maximum flow rate from each sprayhead for a maximum combined flow of 2.4 gpm
- 1/2" NPT connections

Material

- KOHLER finishes resist corrosion and tarnishing

Installation

- Ceiling-mount
- Soldering template included for ease of installation

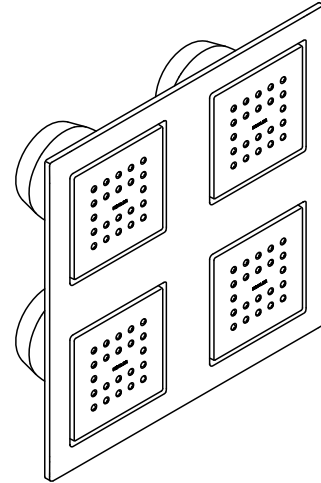

Codes/Standards






ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992




KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant [®] Polished Nickel
	BN	Vibrant [®] Brushed Nickel
	BV	Vibrant [®] Brushed Bronze
	BL	Matte Black

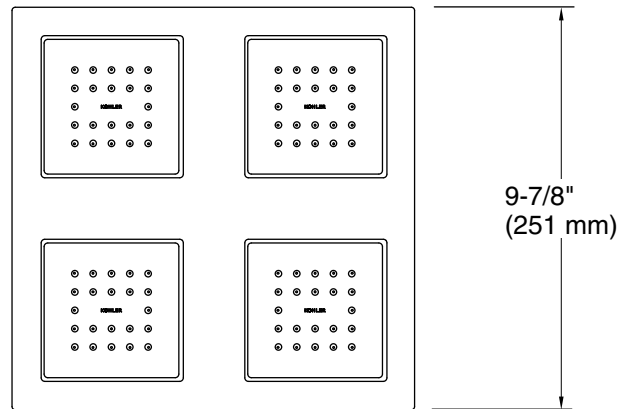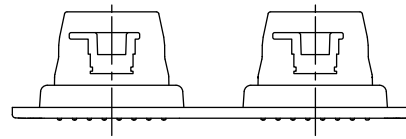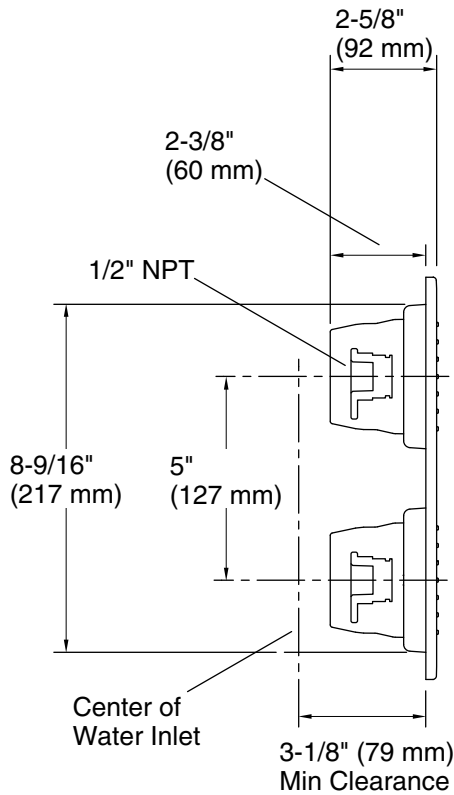

Technical Information

All product dimensions are nominal.

Faucet flow rate: 2.4 gal/min (9.1 l/min)

Spout:

Shower/Rainhead rated max flow: 2.5 gal/min (9.5 l/min)

Notes

Install this product according to the installation instructions.