


# MIDDLETON SQUARE™

GLAZED CERAMIC WALL

**MARAZZI**®  
DARE TO BE BOLD™

## WALL TILE

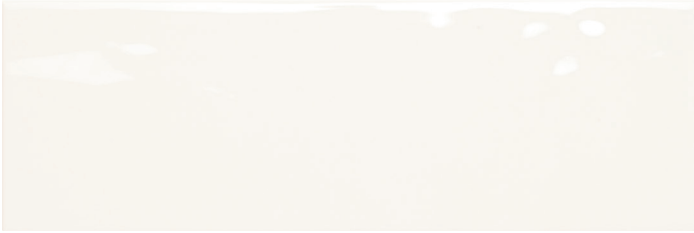

**MS40** Oxford White



**MS41** Windsor Cream



**MS42** Latte



**MS43** Urban Mist



**MS44** Steeple Gray




**MS45** Black Bean

## USAGE

Floors	Walls	Countertops
	W	

### SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	4 x 12 Wall Tile	(4-1/4" x 12-7/8") (10.90 cm x 32.76 cm)	5/16"	10.64	28

### APPLICATIONS


	Target DCOF wet	Suitable
Dry & Level - Interior Floor	N/A	
Wet & Level - Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	■
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [marazzitile.com/DCOF](http://marazzitile.com/DCOF).


#### APPLICATION NOTES:

Suitable for exterior applications in non-freezing climates, when proper installation methods are followed

### TRIM

Description	Number	Size	Shape
Wall Bullnose (12 inch side)	S-44C9	4 x 12	

### INSTALLATION

Grout Joint Recommendation	Shade Variation
1/16" (when rectangular size is used in a staggered brick-joint pattern, overlap should not exceed 33%)	 Low Variation

### PERFORMANCE CHARACTERISTICS

	ASTM#	Wall Result
Water Absorption	C373	< 20.0%
Breaking Strength	C648	> 120 - 230 lbs
Scratch Hardness	MOHS	4.0 - 6.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: [marazzitile.com/information/TestResults](http://marazzitile.com/information/TestResults).

### NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: [marazzitile.com/Factors](http://marazzitile.com/Factors)



Wall Tile



Post Consumer  
Recycled Content



Pre-Consumer  
Recycled Content

