Compression Fittings – Type CPR

TYPE CPR COMPRESSION FITTINGS

Applications:

Use type CPR compression fittings for:

- Both IMC and metallic rigid conduit
- New work in poured concrete
- Maintenance, repairs and alterations
- Connections at panels and boxes
- New, altered or damaged stub-ups
- Applicable locations where field threading is impractical or undesirable

Features:


- UL Listed for use with IMC as well as metallic rigid conduit
- Unequaled versatility for the installer
- Unique gland ring design tightens up in fewer turns; provides outstanding pull-out strength; saves time and adds confidence
- Advanced, thoughtful design and premium materials team up for an installation you can be proud of
- Concrete tight
- Threadless

Certifications and Compliances:

- UL/cUL Listed
- UL514B Fittings for Conduit and Outlet Boxes


Standard Materials:

- Bodies – malleable iron
- Compression nuts – iron
- Compression rings – zinc plated steel
- Locknuts – zinc plated steel
- Insuliners – nylon

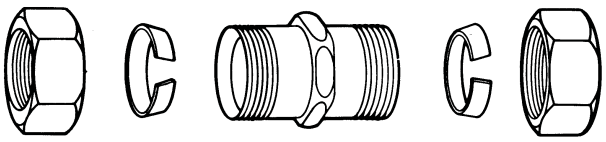

Straight Connectors – Insulated

UL File No. E-19189



Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
CPR11	½"	50	19
CPR12	¾"	25	23
CPR13	1"	10	42
CPR14	1¼"	10	64
CPR15	1½"	5	87
CPR16	2"	5	113
CPR17	2½"	2	130
CPR18	3"	1	220
CPR19	3½"	1	280
CPR20	4"	1	320

Straight Connectors – Non-insulated

UL File No. E-19189



Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
CPR1	½"	50	19
CPR2	¾"	25	23
CPR3	1"	10	42
CPR4	1¼"	10	64
CPR5	1½"	5	87
CPR6	2"	5	113
CPR7	2½"	2	130
CPR8	3"	1	220
CPR9	3½"	1	280
CPR10	4"	1	320

Couplings

UL File No. E-19189



Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
CPR21	½"	25	26
CPR22	¾"	20	38
CPR23	1"	10	59
CPR24	1¼"	5	85
CPR25	1½"	5	124
CPR26	2"	2	162
CPR27	2½"	2	220
CPR28	3"	1	320
CPR29	3½"	1	380
CPR30	4"	1	440