

MORELLO™
GLASS & METAL

MOSAICS & ACCENTS



Photo features Morello Moonstone 5/8 x Random mosaic on the fireplace.

MORELLO™ GLASS & METAL MOSAICS

Morello™ from American Olean® features eclectic mosaic blends that exude modern character. Cultivated to suit every design scheme, Morello's multiple colors and finishes reflect today's sophisticated tastes while the mix of glass and extruded aluminum provide both harmony and contrast.

MORELLO™

5/8 x 5/8 GLASS & ALUMINUM MOSAIC



QUARTZ MM01



MOONSTONE MM02



OBSIDIAN MM03



AMBER MM04

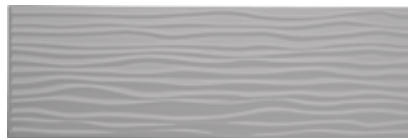


TOPAZ MM05

COORDINATING TILE IDEAS



REFINED METALS™
RM51 Stainless
3 x 6 Linear Wave Metal Wall Tile - Gloss



URBAN CANVAS™
Gloss Light Smoke 0042
4-1/4 x 12-3/4 Wave Wall Tile



All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.

5/8 x RANDOM GLASS & ALUMINUM MOSAIC

MOSAICS & ACCENTS



QUARTZ MM01



MOONSTONE MM02



OBSIDIAN MM03



AMBER MM04





TOPAZ MM05



Photo features Morello™ Moonstone 5/8 x Random mosaic.

SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	5/8 x 5/8 Mosaic ■	11-7/8" x 11-7/8" Sheet (30.00 cm x 30.00 cm Sheet)	5/16"	10.00	10
	5/8 x Random Mosaic ■	13-1/4" x 11-7/8" Sheet (33.66 cm x 30.00 cm Sheet)	5/16"	10.00	10

■ Mesh-mounted

INSTALLATION & PRICING

RECOMMENDED GROUT JOINT:
Mosaic: 1/8"

RELATIVE PRICING: High

SHADE VARIATION



PERFORMANCE CHARACTERISTICS


	ASTM#	MOSAIC RESULT
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 100 lbs.
Scratch Hardness	MOHS	4.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: americanolean.com/information/TestResults.

USAGE

FLOORS	WALLS	COUNTERTOPS
	W	

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.
Morello is suitable for use in wet areas such as shower walls. During the production process a protective coating is added to the surface of aluminum to provide a rust resistant finish. Also, anti-oxidant oil is applied to ensure quality.

NOTES

For additional information refer to "Factors to Consider" at: americanolean.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Since there are variations in all glass products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.2 standards.

Use of a white latex modified thin-set is recommended for installation.



All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.