THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE AWG [mm²]	TAB SIZE INCH [mm]	HOUSING COLOR (TRANSLUCENT)	MAX WIRE INSULATION DIA.	DIMENSIONS in. [mm]			CRIMP TOOLS
					L± .03 [0,8]	W± .01 [0,3]	H± .01 [0,3]	
EDNF18250FIMB	#22-18 [0,5-1,0]	.250 X .032 [6,3 X 0,8]	RED	.136 [3,45]	.91 [23,1]	.45 [11,4]	.34 [8,6]	CT-520 CT-600-A CT-1525 CT-2500
EDNF14250FIMB	#16-14 [1,5-2,5]	.250 X .032 [6,3 X 0,8]	BLUE	.160 [4,06]	.91 [23,1]	.45 [11,4]	.34 [8,6]	
EDNF10250FIMB	#12-10 [4,0-6,0]	.250 X .032 [6,3 X 0,8]	YELLOW	.220 [5,59]	.96 [24,4]	.45 [11,4]	.36 [9,1]	CT-600-A CT-1550 CT-1551 CT-2500

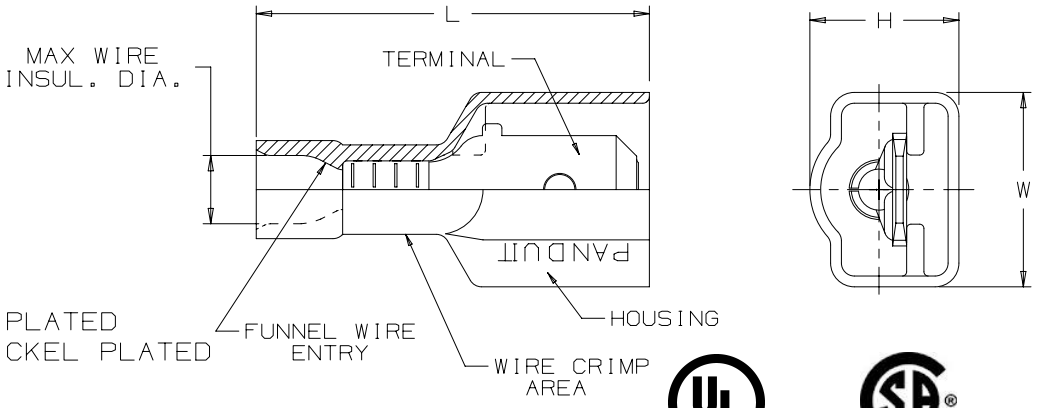

NOTES:

1. UL LISTED AND CSA CERTIFIED FOR:
   A. STRANDED COPPER WIRE ONLY
   B. 221°F (105°C) MAX TEMP RATING (CSA)
   C. 257°F (125°C) MAX TEMP RATING (UL)
   D. 600V MAX VOLTAGE

2. MATERIAL:
   A. STAMPING: .016" (0.41) THK BRASS, NICKEL PLATED
      EDNF10250FIMB: .032" (0,81) THK COPPER, NICKEL PLATED
   B. HOUSING: 6/6 NYLON

3. WIRE STRIP LENGTH: 9/32" $^{+1/32}_{-0}$ [7,1mm $^{+0.8}_{-0}$]
   FOR EDNF10250FIMB: 3/8" $^{+1/32}_{-0}$ [9,5mm $^{+0.8}_{-0}$]

4. SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX

5. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

LISTED 20H3 E78522

CERTIFIED LR31212

TITLE

STRONGHOLD MALE DISCONNECT (250 SERIES) NYLON FULLY INSULATED #22-10 AWG

CUSTOMER DRAWING

ITEM REVISION NAME: 00123SHY/00

DATASET FILE NAME: 00123SHY/00

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .1 [2.54] .XXX ± .005 [.127]
.XX ± .01 [.25] ANGLES ± 5 °

THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: SH41402

DRAWN BY	DATE	CHK	SCALE	SIZE
JHNU	2/18	TMR	NTS	A

SHT 1 OF 1

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	2/18	JHNU	TMR	RGB	RELEASED	00123SH

D10100DA/20