

• fully integrated • stainless steel interior • **2004 retail product specifications** • flexible racking • energy efficient • nylon •

GE Profile™ and GE® Dishwashers

America's most beautiful dishwashers...you be the judge.


imagination at work

Beauty that's more than skin deep.





The real beauty of the **GE Profile™ fully integrated dishwasher** is its remarkable versatility. The hidden **electronic control panel** is tucked out of sight along the top of the door for freedom of design like never before. Choose the **contour stainless exterior** with its refined **sculptured handle**, or conceal the front with custom wood panels that **blend seamlessly** into existing cabinetry. Or **express yourself** on a one-of-a-kind **designer's canvas**. And beauty isn't only skin deep; inside you'll find unparalleled **capacity** and **flexibility**, the remarkably silent new **QuietPower™ VI** sound package and **performance that's guaranteed**. It's a rare kind of beauty...striking inside and out.

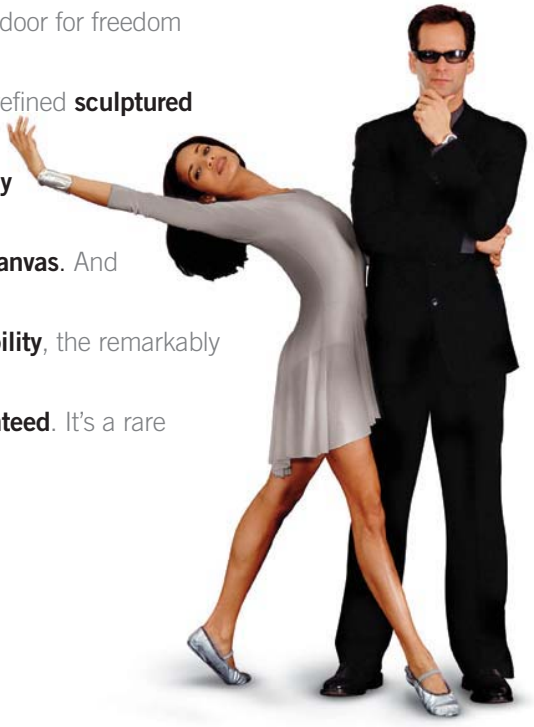

Feature Gallery



Model shown: PDW9880J



Fully integrated contour door

Offers a gentle, seamless curve for an upscale appearance.



Bright annealed stainless steel interior

A lustrous finish and lasting beauty that resists stains and corrosion.



Giant tub with maximum capacity nylon racking

Holds tall and oversized items; washes 16 place settings at once.



Four-position adjustable/removable upper rack

Pulls out completely or moves up, down and diagonally for maximum loading flexibility.



Countdown display with 1–24-hour Delay Start

Signals remaining cycle time and starts the dishwasher when no one's home or during off-peak hours when utilities are at reduced rates.



QuietPower™ VI sound package with concealed ActiveVent

Features the fan-assist drying system, the new concealed ActiveVent and an enhanced insulation package to make this the quietest GE Profile™ dishwasher ever.



100% fold-down tines and adaptable bowl tines in lower rack

Flip up to hold bowls, or flip down to provide maximum loading flexibility in the lower rack.




3 nylon-coated Pearlescent™ metal utility shelves with StemSafe™ in upper rack

Durable metal shelves create space in the upper rack for cups and utensils and secure delicate stemware.



4 sets fold-down tines with 2 multi-position in upper rack

Provide additional flexibility for loading odd-shaped items.



Fully integrated light-touch electronic controls with 6 status lights

Add a higher level of control, with easy-to-use light-touch pads and status lights hidden inside the door's top edge for increased design options.



Pearlescent™ nylon racks

Complement the radiance of stainless steel.



Fan-assist dry

Employs a quietly running fan to dry dishes quickly and efficiently.

Built-In Dishwashers



PDW9800J

GE Profile™ Fully Integrated Dishwasher

- **Fully integrated contour door** **Only GE has it!**
- Bright annealed stainless steel interior
- Giant tub with maximum capacity nylon racking
- Four-position adjustable/removable upper rack
- Countdown display with 1–24-hour Delay Start
- 3 nylon-coated Pearlescent™ metal utility shelves with StemSafe™ in upper rack
- 100% fold-down tines and adaptable bowl tines in lower rack



PDW9880JSS

PDW9800JWW

PDW9800JCC

PDW9800JBB

ENERGY STAR



PDW9700JII

GE Profile Fully Integrated Dishwasher

- **Fully integrated door for custom panels**
- Bright annealed stainless steel interior
- Giant tub with maximum capacity nylon racking
- **Four-position adjustable/removable upper rack**
- **Countdown display with 1–24-hour Delay Start**
- **3 nylon-coated Pearlescent metal utility shelves with StemSafe in upper rack**
- **100% fold-down tines and adaptable bowl tines in lower rack**



ENERGY STAR

Stainless steel White Bisque Black

Bold = feature upgrade from previous model.

NSF Protocol for sanitization and cleaning performance of household spray-type dishwashers. (1997)



PDW9200J

GE Profile Fully Integrated Dishwasher

- Fully integrated contour door **Only GE has it!**
- Bright annealed stainless steel interior
- Giant tub with maximum capacity nylon racking
- Removable upper rack
- 2/4/8-hour Delay Start
- QuietPower™ VI sound package with concealed ActiveVent
- Audible end-of-cycle signal



PDW9280JSS
PDW9200JWW
PDW9200JCC
PDW9200JBB

ENERGY STAR



PDW8880J

GE Profile Stainless Built-In Dishwasher

- **Stainless one-piece contour door** **Only GE has it!**
- Bright annealed stainless steel interior
- Giant tub with maximum capacity nylon racking
- Four-position adjustable/removable upper rack
- Countdown display with 1–24-hour Delay Start
- 3 nylon-coated Pearlescent metal utility shelves with StemSafe in upper rack
- 100% fold-down tines and adaptable bowl tines in lower rack



PDW8880JSS
PDW8800JWW
PDW8800JCC
PDW8800JBB

ENERGY STAR

Stainless steel White Bisque Black

Built-In Dishwashers



PDW8700J

GE Profile™ Stainless Built-In Dishwasher

- **Full-length flat door (CustomStyle™ panel trim kit available)**
- Bright annealed stainless steel interior
- Giant tub with maximum capacity nylon racking
- Four-position adjustable/removable upper rack
- **Countdown display with 1–24-hour Delay Start**
- **3 nylon-coated Pearlescent™ metal utility shelves with StemSafe™ in upper rack**
- **100% fold-down tines and adaptable bowl tines in lower rack**



PDW8700JWW

PDW8700JCC

PDW8700JBB

ENERGY STAR



PDW8600J

GE Profile Stainless Built-In Dishwasher

- **One-piece color wrap contour door** **Only GE has it!**
- Bright annealed stainless steel interior
- Giant tub with maximum capacity nylon racking
- Four-position adjustable/removable upper rack
- Countdown display with 1–9-hour Delay Start
- QuietPower™ V sound package
- 100% fold-down tines in lower rack



PDW8680JSS

PDW8600JWW

PDW8600JCC

PDW8600JBB

ENERGY STAR

Stainless steel White Bisque Black

Bold = feature upgrade from previous model.

NSF Protocol for sanitization and cleaning performance of household spray-type dishwashers. (1997)



PDW8500J

GE Profile Stainless Built-In Dishwasher

- **Full-length flat door (CustomStyle panel trim kit available)**
- Bright annealed stainless steel interior
- Giant tub with maximum capacity nylon racking
- Four-position adjustable/removable upper rack
- Countdown display with 1–9-hour Delay Start
- QuietPower V sound package
- **100% fold-down tines in lower rack**



PDW8500JWW

PDW8500JCC

PDW8500JBB

ENERGY STAR

Discontinued June 2004. While quantities last.



PDW8400J

GE Profile Stainless Built-In Dishwasher

- One-piece color wrap contour door **Only GE has it!**
- Bright annealed stainless steel interior
- Giant tub with maximum capacity nylon racking
- **Four-position adjustable/removable upper rack**
- **Countdown display with 1–9-hour Delay Start**
- QuietPower V sound package
- **Light-touch electronic controls with 6 status lights**



PDW8480JSS

PDW8400JWW

PDW8400JCC

PDW8400JBB

ENERGY STAR

Stainless steel White Bisque Black

Built-In Dishwashers



PDW8200J

GE Profile™ Stainless Built-In Dishwasher

- One-piece color wrap contour door **Only GE has it!**
- Bright annealed stainless steel interior
- Giant tub with maximum capacity nylon racking
- Removable upper rack
- 2/4/8-hour Delay Start
- QuietPower™ V sound package
- Light-touch electronic controls



PDW8280JSS
PDW8200JWW
PDW8200JCC
PDW8200JBB

ENERGY STAR



PDW7880J

GE Profile Built-In Dishwasher

- **Stainless one-piece contour door** **Only GE has it!**
- Nylon racks with color-matched components
- Giant tub with maximum capacity nylon racking
- Four-position adjustable upper rack
- 100% fold-down tines in lower rack
- QuietPower IV sound package
- Countdown display with 1–9-hour Delay Start



PDW7880JSS
PDW7800JWW
PDW7800JCC
PDW7800JBB

ENERGY STAR

Stainless steel White Bisque Black

Bold = feature upgrade from previous model.

NSF Protocol for sanitization and cleaning performance of household spray-type dishwashers. (1997)



PDW7700J

GE Profile Built-In Dishwasher

- **Full-length flat door (CustomStyle™ panel trim kit available)**
- Nylon racks with color-matched components
- Giant tub with maximum capacity nylon racking
- Four-position adjustable upper rack
- **100% fold-down tines in lower rack**
- QuietPower IV sound package
- Countdown display with 1–9-hour Delay Start



PDW7700JWW

PDW7700JCC

PDW7700JBB

ENERGY STAR



PDW7300J

GE Profile Built-In Dishwasher

- One-piece color wrap contour door **Only GE has it!**
- Nylon racks with color-matched components
- Giant tub with maximum capacity nylon racking
- Four-position adjustable upper rack
- 4 utility shelves with StemSafe™ in upper rack
- QuietPower IV sound package
- Countdown display with 1–9-hour Delay Start



PDW7300JWW

PDW7300JCC

PDW7300JBB

ENERGY STAR

White Bisque Black

Built-In Dishwashers



GSD6960J

GE Triton® XL Built-In Dishwasher

- **Stainless full-length contour door**
- XtraClean™ wash system with 3 direct-feed wash arms
- XtraClean sensor **Only GE has it!**
- Giant tub with maximum capacity nylon racking
- Four-position adjustable upper rack
- QuietPower™ IV sound package
- Countdown display with 1–9-hour Delay Start



GSD6960JSS‡

GSD6900JWW

GSD6900JCC

GSD6900JBB

ENERGY STAR

‡Available April 2004



GSD6860J

GE Triton XL Built-In Dishwasher

- **Stainless full-length flat door**
- XtraClean wash system with 3 direct-feed wash arms
- XtraClean sensor **Only GE has it!**
- Giant tub with maximum capacity nylon racking
- **Four-position adjustable upper rack**
- QuietPower IV sound package
- **Countdown display with 1–9-hour Delay Start**



GSD6860JSS

ENERGY STAR

Discontinued June 2004. While quantities last.

Stainless steel White Bisque Black

NSF Protocol for sanitization and cleaning performance of household spray-type dishwashers. (1997)



GSD6600G

GE Triton XL Built-In Dishwasher

- Full-length flat door
- XtraClean wash system with 3 direct-feed wash arms
- XtraClean sensor **Only GE has it!**
- **Giant tub with maximum capacity nylon racking**
- **2 sets fold-down tines in lower rack**
- **QuietPower IV sound package**
- 2/4/8-hour Delay Start



GSD6660GSS

GSD6600GWW

GSD6600GCC

GSD6600GBB



GSD6200J

GE Triton XL Built-In Dishwasher

- Full-length flat door
- XtraClean wash system with 3 direct-feed wash arms
- XtraClean sensor **Only GE has it!**
- Giant tub with maximum capacity racking
- **2 utility shelves in upper rack**
- **QuietPower III sound package**
- 2/4/8-hour Delay Start



GSD6260JSS

GSD6200JWW

GSD6200JCC

GSD6200JBB

Built-In Dishwashers



GSD6100K

GE Triton® XL Built-In Dishwasher

- Full-length flat door
- XtraClean™ wash system with 3 direct-feed wash arms
- XtraClean sensor **Only GE has it!**
- Giant tub with maximum capacity racking
- 16 place setting capacity
- QuietPower™ II sound package
- 2/4/8-hour Delay Start

GSD6100KWW

GSD6100KBB



GSD5500G

GE Triton Built-In Dishwasher

- TriClean™ wash system with 3 wash arms **Only GE has it!**
- Electronic controls
- CleanSensor
- SaniWash cycle
- Super upper rack
- QuietPower II sound package
- 2/4/8-hour Delay Start

GSD5560GSS

GSD5500GWW

GSD5500GCC

GSD5500GBB



GSD4000J

GE Nautilus™ Built-In Dishwasher

- TouchTap™ controls
- PowerScrub™ wash system
- HotStart™ option
- 1-6-hour Delay Start
- Super upper rack
- **QuietPower I sound package**
- Piranha™ hard food disposer

GSD4060JSS

GSD4000JWW

GSD4000JCC

GSD4000JBB



GSD2600G

GE Nautilus Built-In Dishwasher

- Trimless door design
- QuietPower motor
- HotStart option
- QuietDesign™ sound package
- Plate Warmer cycle
- Heated Dry option
- Light Wash cycle

GSD2600GWW

GSD2600GCC

GSD2600GBB

Stainless steel White Bisque Black

Bold = feature upgrade from previous model.

Convertible Dishwashers



GSC3400J

GE Nautilus Convertible Dishwasher

- **TouchTap controls**
- Candlelight woodgrain laminate top
- PowerScrub wash system
- **1–6-hour Delay Start**
- **China/Crystal cycle**
- QuietDesign sound package
- Piranha hard food disposer

Portable now…built-in later.



GSC3400JWW

GSC3400JBB



GSC3200J

GE Nautilus Convertible Dishwasher

- Pushbutton controls
- Candlelight woodgrain laminate top
- PowerScrub wash system
- QuietDesign sound package
- 5 wash levels

Portable now…built-in later.



GSC3200JWW

GSC3200JBB

White Black

GE Spacemaker® Dishwashers



GSM2100G

GE Spacemaker Under-the-Sink Dishwasher

- Trimless door design
- Spacemaker upper rack
- Deluxe lower rack
- Deluxe silverware basket
- QuietPower™ motor
- HotStart™ option



GSM2100GWW

GSM2100GCC

Note: Under-the-sink dishwashers can be installed under GE cooktop models JP201C and JP202D. Refer to cooktop installation instructions.



GSM1800J

GE Spacemaker 18" Built-In Dishwasher

- Bright annealed stainless steel interior
- Full-length flat door
- Nylon racks
- Removable upper rack
- China/Crystal cycle
- Pots and Pans cycle
- Heated Dry option



GSM1800JWW

GSM1800JBB

White Bisque Black

Disposers and Compactor



GFC1020F

GE® Continuous Feed Disposer

- **Heavy-duty 1 HP motor**
- **2800-RPM grinding action**
- **QuietPower III sound insulation package**
- Super capacity
- One-year full replacement **plus six-year limited warranty***
- Stainless steel, dual-swivel, anti-jam grinding blades



GFC320F

GE Continuous Feed Disposer

- 1/3 HP motor
- 1900-RPM grinding action
- Standard sound insulation package
- Large capacity
- One-year full replacement warranty*
- Stainless steel, dual-swivel, anti-jam grinding blades

GFC325F

Similar to GFC320F with attached line cord.



GFC720F

GE Continuous Feed Disposer

- **Heavy-duty 3/4 HP motor**
- **2700-RPM grinding action**
- **QuietPower II sound insulation package**
- **Super capacity**
- One-year full replacement **plus four-year limited warranty***
- Stainless steel, dual-swivel, anti-jam grinding blades



GFB760F

GE Batch Feed Disposer

- **Batch feed operation**
- Heavy-duty 3/4 HP motor
- 2700-RPM grinding action
- QuietPower II sound insulation package
- Super capacity
- One-year full replacement plus four-year limited warranty*
- Stainless steel, dual-swivel, anti-jam grinding blades



GFC530F

GE Continuous Feed Disposer

- Heavy-duty 1/2 HP motor
- 2600-RPM grinding action
- **QuietPower I sound insulation package**
- **Extra-large capacity**
- One-year full replacement **plus two-year limited warranty***
- Stainless steel, dual-swivel, anti-jam grinding blades

GFC535F

Similar to GFC530F with attached line cord.



GFC520F

GE Continuous Feed Disposer

- **Heavy-duty 1/2 HP motor**
- **2600-RPM grinding action**
- Standard sound insulation package
- Large capacity
- One-year full replacement **plus one-year limited warranty***
- Stainless steel, dual-swivel, anti-jam grinding blades

GFC525F

Similar to GFC520F with attached line cord.



GCG1540F

GE Profile™ Built-In Compactor

- Built-in only
- 1.4 cu. ft. capacity
- 1/3 HP motor
- Removable key lock
- Rear wheels
- Toe pedal opener
- Heavy-gauge steel construction

GCG1540FSS

GCG1530FWW

GCG1550FCC

GCG1520FBB

*See written warranty for complete details.


GE Profile™ Fully Integrated Dishwashers

	GE Profile		
	ENERGY STAR®	**ENERGY STAR**	**ENERGY STAR**
	PDW9880JSS PDW9800JWW PDW9800JCC PDW9800JBB	**PDW9700JII**	**PDW9280JSS PDW9200JWW PDW9200JCC PDW9200JBB**
Features			
Tub and door liner	Stainless steel	Stainless steel	Stainless steel
Giant tub	●	●	●
Front appearance	Contour door	Panel ready door	Contour door
Upscale flush design	●	●	●
Full-length door design	Fully integrated	●	Fully integrated
Wash system	ExtraClean™	ExtraClean	ExtraClean
Wash arms	3 direct-feed	3 direct-feed	3 direct-feed
Wash levels	6	6	6
Water filtration	100% triple with ExtraFine™ filter	100% triple with ExtraFine filter	100% triple with ExtraFine filter
Dual pumps and motors	●	●	●
Hard food disposer	Piranha™	Piranha	Piranha
Sensor	ExtraClean	ExtraClean	ExtraClean
Automatic temperature control	●	●	●
Electronic controls	Light-touch, hidden controls	Light-touch, hidden controls	Light-touch, hidden controls
Cycle progress indicators	Countdown display with 6 status lights	Countdown display with 6 status lights	1 "Clean" light, 1 "Sanitized" light
Touchpads	Top controls	Top controls	Top controls
Selections/Enhancements	Variable*	Variable*	Variable*
Last cycle memory	●	●	●
Audible end-of-cycle signal	●	●	●
Selections			
Anti-bacterial (NSF**)	●	●	●
Cookware	●	●	●
Normal Wash	●	●	●
China/Crystal	●	●	●
Glasses	●	●	
Plastics Cycle	●	●	
SpeedCycle™ (wash & dry)	●	●	
Rinse Only	●	●	●
Enhancements			
Delay Start	1-24-hour	1-24-hour	2/4/8-hour
Hi-Temp Wash	Added heat	Added heat	Added heat
Hi-Temp Rinse	Auto w/added heat	Auto w/added heat	Auto w/added heat
PreWash	●	●	
Heated Dry	●	●	●
HotStart™	Automatic	Automatic	Automatic
Child lock	●	●	●
Racking			
Maximum capacity nylon racking	Pearlescent™	Pearlescent	Color-matched
Adjustable upper rack with CleanTip tines	4-position	4-position	
Removable upper rack†	Nylon deep tiered	Nylon deep tiered	Nylon deep tiered
Upper rack handle	●	●	
Fold-down tine flexibility	4 sets with 2 multi-position, upper; 100% and adaptable bowl tines, lower	4 sets with 2 multi-position, upper; 100% and adaptable bowl tines, lower	2 lower
Utility shelves	3 Pearlescent metal StemSafe™ upper	3 Pearlescent metal StemSafe upper	2 upper
Silverware basket	Super capacity 3-pc. with ExtraBasket™	Super capacity 3-pc. with ExtraBasket	Super capacity
Cutlery tray	●	●	
Hard countertop installation	Ready	Ready	Ready
Calrod® heater	Multi-wattage	Multi-wattage	Multi-wattage
Rinse aid dispenser	w/Indicator and adjustment	w/Indicator and adjustment	w/Indicator and adjustment
Door handle	Sculptured	Sculptured	Sculptured
Quiet			
Sound insulation package	QuietPower VI	QuietPower VI	QuietPower VI
Tub insulation	Thinstall™ with heat-bonded bitumen	Thinstall with heat-bonded bitumen	Thinstall with heat-bonded bitumen
Door insulation	With bitumen	With bitumen	With bitumen
QuietPower™ motor	●	●	●
ActiveVent system	Concealed w/ fan-assist dry	Concealed w/ fan-assist dry	Concealed w/ fan-assist dry
Tub collar trim	●	●	●
Electronic control system	●	●	●
Quiet water valve	●	●	●
Appearance			
Colors available***	SS, WW, CC, BB	Panel required	SS, WW, CC, BB
Weights & Dimensions			
Height w/legs retracted (in.)	34	34	34
Height w/legs removed (in.)	33-13/16	33-13/16	33-13/16
Overall width (in.)	24	24	24
Overall depth (in.)	24-3/4††	24†††	24-3/4††
Approx. shipping weight (lbs.)	105	105	105
Accessories			
Requires kit for 1/4" panel capability with trim	N/A	N/A	N/A
Requires kit for trimless 3/4" panel capability	N/A	Panel ready‡	N/A

*Sensor controlled.
**Certified by National Sanitation Foundation.
***SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.

† For best results, use shower nozzle attachment when upper rack is removed.
†† Add 1/2" for deepest part of contour door. Allow an additional 2 inches for the handle.
††† Add 3/4" for custom panel and additional room for custom handle.
‡ The most common panel dimensions are 30-1/4"H by 23-3/4"W. See template Pub. No. 5-X063 supplied with dishwasher for details on other custom sizes.

GE Profile Built-In Dishwasher Dimensions—<u>excluding</u> PDW9700JII (in inches)

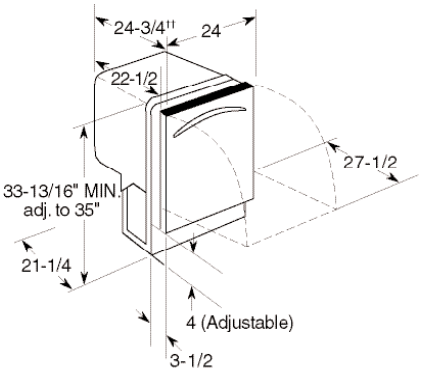


††Add 1/2" for deepest part of contour door. Allow an additional 2" for the handle on PDW9800/9200 Series models.

Electrical Rating

Voltage AC.....120
Hertz.....60
Total connected load amperage.....9.1
Calrod heater watts max.....875
For use on adequately wired 120V, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

GE Profile Built-In Dishwasher Dimensions—PDW9700JII (in inches)

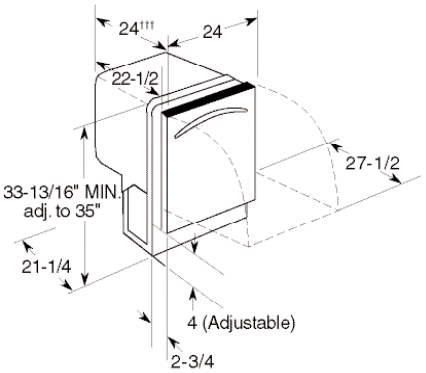

†††Add 3/4" for custom panel and additional room for custom handle.

Note: Custom panels are required for model PDW9700JII. A panel template, Pub. No. 5-X063, is boxed with each dishwasher or is also available at an additional cost.

Electrical Rating

Voltage AC.....120
Hertz.....60
Total connected load amperage.....9.1
Calrod heater watts max.....875
For use on adequately wired 120V, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

ENERGY STAR NSF UL Listed by Underwriters Laboratories

GE Profile Stainless Built-In Dishwashers

	GE Profile					
	ENERGY STAR	**ENERGY STAR**	**ENERGY STAR**	**ENERGY STAR**	**ENERGY STAR**	**ENERGY STAR**
	PDW8880JSS PDW8800JWW PDW8800JCC PDW8800JBB	**PDW8700JWW PDW8700JCC PDW8700JBB**	**PDW8680JSS PDW8600JWW PDW8600JCC PDW8600JBB**	**PDW8500JWW PDW8500JCC PDW8500JBB**	**PDW8480JSS PDW8400JWW PDW8400JCC PDW8400JBB**	**PDW8280JSS PDW8200JWW PDW8200JCC PDW8200JBB**
Features						
Tub and door liner	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Giant tub	●	●	●	●	●	●
Front appearance	Contour door	Flat door	Contour door	Flat door	Contour door	Contour door
Upscale flush design	●	●	●	●	●	●
Full-length door design	One-piece color wrap	●	One-piece color wrap	●	One-piece color wrap	One-piece color wrap
Wash system	ExtraClean	ExtraClean	ExtraClean	ExtraClean	ExtraClean	ExtraClean
Wash arms	3 direct-feed	3 direct-feed	3 direct-feed	3 direct-feed	3 direct-feed	3 direct-feed
Wash levels	6	6	6	6	6	6
Water filtration	100% triple with ExtraFine filter	100% triple with ExtraFine filter	100% triple with ExtraFine filter	100% triple with ExtraFine filter	100% triple with ExtraFine filter	100% triple with ExtraFine filter
Dual pumps and motors	●	●	●	●	●	●
Hard food disposer	Piranha	Piranha	Piranha	Piranha	Piranha	Piranha
Sensor	ExtraClean	ExtraClean	ExtraClean	ExtraClean	ExtraClean	ExtraClean
Automatic temperature control	●	●	●	●	●	●
Electronic controls	Light-touch	Light-touch	Light-touch	Light-touch	Light-touch	Light-touch
Cycle progress indicators	Countdown display with 6 status lights	Countdown display with 6 status lights	Countdown display with 6 status lights	Countdown display with 6 status lights	Countdown display with 6 status lights	1 "Clean" light, 1 "Sanitized" light
Touchpads	12	12	12	12	11	9
Selections/Enhancements	Variable*	Variable*	Variable*	Variable*	Variable*	Variable*
Last cycle memory	●	●	●	●	●	●
Selections						
Anti-bacterial (NSF**)	●	●	●	●	●	●
Cookware	●	●	●	●	●	●
Normal Wash	●	●	●	●	●	●
China/Crystal	●	●	●	●	●	●
Glasses Cycle	●	●	●	●		
Plastics Cycle	●	●				
SpeedCycle (wash & dry)	●	●	●	●	●	
Rinse Only	●	●	●	●	●	●
Enhancements						
Delay Start	1-24-hour	1-24-hour	1-9-hour	1-9-hour	1-9-hour	2/4/8-hour
Hi-Temp Wash	Added heat	Added heat	Added heat	Added heat	Added heat	Added heat
Hi-Temp Rinse	Auto w/added heat	Auto w/added heat	Auto w/added heat	Auto w/added heat	Auto w/added heat	Auto w/added heat
PreWash	●	●	●	●	●	
Heated Dry	●	●	●	●	●	●
HotStart	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Child lock	●	●	●	●	●	●
Racking						
Maximum capacity nylon racking	Pearlescent	Pearlescent	Pearlescent	Pearlescent	Pearlescent	Color-matched
Adjustable upper rack with CleanTip tines	4-position	4-position	4-position	4-position	4-position	
Removable upper rack†	Nylon deep tiered	Nylon deep tiered	Nylon deep tiered	Nylon deep tiered	Nylon deep tiered	Nylon deep tiered
Upper rack handle	●	●				
Fold-down tine flexibility	4 sets with 2 multi-position, upper; 100% and adaptable bowl tines, lower	4 sets with 2 multi-position, upper; 100% and adaptable bowl tines, lower	4 sets with 2 multi-position, upper; 100% lower	4 sets with 2 multi-position, upper; 100% lower	2 sets with 1 multi-position, upper; 2 lower	2 lower
Utility shelves	3 Pearlescent metal StemSafe upper	3 Pearlescent metal StemSafe upper	4 w/StemSafe upper	4 w/StemSafe upper	2 w/StemSafe upper	2 upper
Silverware basket	Super capacity 3-pc. with ExtraBasket	Super capacity 3-pc. with ExtraBasket	Super capacity 3-pc. with ExtraBasket	Super capacity 3-pc. with ExtraBasket	Super capacity 3-pc.	Super capacity
Cutlery tray	●	●				
Hard countertop installation	Ready	Ready	Ready	Ready	Ready	Ready
Calrod heater	Multi-wattage	Multi-wattage	Multi-wattage	Multi-wattage	Multi-wattage	Multi-wattage
Rinse aid dispenser	w/Indicator and adjustment	w/Indicator and adjustment	w/Indicator and adjustment	w/Indicator and adjustment	w/Indicator and adjustment	w/Indicator and adjustment
Latch	Squeeze	Squeeze	Squeeze	Squeeze	Squeeze	Squeeze
Quiet						
Sound insulation package	QuietPower V	QuietPower V	QuietPower V	QuietPower V	QuietPower V	QuietPower V
Tub insulation	Thinstall with heat-bonded bitumen	Thinstall with heat-bonded bitumen	Thinstall with heat-bonded bitumen	Thinstall with heat-bonded bitumen	Thinstall with heat-bonded bitumen	Thinstall with heat-bonded bitumen
Door insulation	With bitumen	With bitumen	With bitumen	With bitumen	With bitumen	With bitumen
QuietPower motor	●	●	●	●	●	●
ActiveVent system	●	●	●	●	●	●
Tub collar trim	●	●	●	●	●	●
Electronic control system	●	●	●	●	●	●
Quiet water valve	●	●	●	●	●	●
Appearance						
Colors available***	SS, WW, CC, BB	WW, CC, BB	SS, WW, CC, BB	WW, CC, BB	SS, WW, CC, BB	SS, WW, CC, BB
Weights & Dimensions						
Height w/legs retracted (in.)	34	34	34	34	34	34
Height w/legs removed (in.)	33-13/16	33-13/16	33-13/16	33-13/16	33-13/16	33-13/16
Overall width (in.)	24	24	24	24	24	24
Overall depth (in.)	24-3/4††	24-3/4	24-3/4††	24-3/4	24-3/4††	24-3/4††
Approx. shipping weight (lbs.)	105	105	105	105	105	105
Accessories						
Requires kit for 1/4" panel capability with trim	N/A	GPF825W/C/B	N/A	GPF825W/C/B	N/A	N/A
Requires kit for trimless 3/4" panel capability	N/A	GPF875W/C/B	N/A	GPF875W/C/B	N/A	N/A


*Sensor controlled. **Certified by National Sanitation Foundation. *** SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black. †For best results, use shower nozzle attachment when upper rack is removed. ††Add 1/2" for deepest part of contour door.

GE Profile™ Built-In Dishwashers

	GE Profile		
	ENERGY STAR®	**ENERGY STAR**	**ENERGY STAR**
	PDW7880JSS PDW7800JWW PDW7800JCC PDW7800JBB	**PDW7700JWW PDW7700JCC PDW7700JBB**	**PDW7300JWW PDW7300JCC PDW7300JBB**
Features			
Tub and door liner	PermaTuf®	PermaTuf	PermaTuf
Giant tub	●	●	●
Front appearance	Contour door	Flat door	Contour door
Upscale flush design	●	●	●
Full-length door design	One-piece color wrap	●	One-piece color wrap
Wash system	ExtraClean™	ExtraClean	ExtraClean
Wash arms	3 direct-feed	3 direct-feed	3 direct-feed
Wash levels	6	6	6
Water filtration	100% triple with ExtraFine™ filter	100% triple with ExtraFine filter	100% triple with ExtraFine filter
Dual pumps and motors	●	●	●
Hard food disposer	Piranha™	Piranha	Piranha
Sensor	ExtraClean	ExtraClean	ExtraClean
Auto. temperature control	●	●	●
Electronic controls	Light-touch	Light-touch	Light-touch
Cycle progress indicators	Countdown display with 6 status lights	Countdown display with 6 status lights	Countdown display with 6 status lights
Touchpads	12	12	11
Selections/Enhancements	Variable*	Variable*	Variable*
Last cycle memory	●	●	●
Selections			
Anti-bacterial (NSF**)	●	●	●
Cookware	●	●	●
Normal Wash	●	●	●
China/Crystal	●	●	●
Glasses Cycle	●	●	
SpeedCycle™ (wash & dry)	●	●	●
Rinse Only	●	●	●
Enhancements			
Delay Start	1-9-hour	1-9-hour	1-9-hour
Hi-Temp Wash	Added heat	Added heat	Added heat
Hi-Temp Rinse	Auto w/added heat	Auto w/added heat	Auto w/added heat
PreWash	●	●	●
Heated Dry	●	●	●
HotStart™	Automatic	Automatic	Automatic
Child lock	●	●	●
Racking			
Maximum capacity nylon racking	Color-matched	Color-matched	Color-matched
Adjustable upper rack with CleanTip tines	4-position deep tiered	4-position deep tiered	4-position deep tiered
Fold-down tine flexibility	4 sets with 2 multi-position upper; 100% lower	4 sets with 2 multi-position upper; 100% lower	2 sets with 1 multi-position upper; 2 lower
Utility shelves	4 w/StemSafe™ upper	4 w/StemSafe upper	4 w/StemSafe upper
Silverware basket	Super capacity 3-pc. with ExtraBasket™	Super capacity 3-pc. with ExtraBasket	Super capacity 3-pc.
Hard countertop installation	Ready	Ready	Ready
Calrod® heater	Multi-wattage	Multi-wattage	Multi-wattage
Rinse aid dispenser	w/Indicator and adjustment	w/Indicator and adjustment	w/Indicator and adjustment
Latch	Squeeze	Squeeze	Squeeze
Quiet			
Sound insulation package	QuietPower IV	QuietPower IV	QuietPower IV
Tub insulation	Thinstall™ Plus	Thinstall Plus	Thinstall Plus
Door insulation	w/mastic	w/mastic	w/mastic
QuietPower™ motor	●	●	●
ActiveVent system	●	●	●
Tub collar trim	●	●	●
Electronic control system	●	●	●
Quiet water valve	●	●	●
Appearance			
Colors available***	SS, WW, CC, BB	WW, CC, BB	WW, CC, BB
Weights & Dimensions			
Height w/legs retracted (in.)	34	34	34
Height w/legs removed (in.)	33-13/16	33-13/16	33-13/16
Overall width (in.)	24	24	24
Overall depth (in.)	24-3/4†	24-3/4	24-3/4†
Approx. shipping wt. (lbs.)	90	90	90
Accessories			
Requires kit for 1/4" panel capability with trim	N/A	GPF825W/C/B	N/A
Requires kit for trimless 3/4" panel capability	N/A	GPF875W/C/B	N/A

* Sensor controlled.
** Certified by National Sanitation Foundation.
*** SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.
†Add 1/2" for deepest part of contour door.

GE Profile Built-In Dishwasher Dimensions—(in inches)

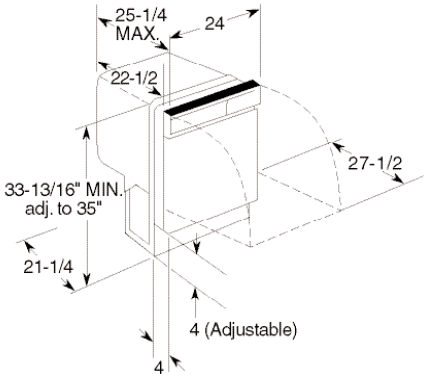

Electrical Rating

Voltage AC.....120
Hertz.....60
Total connected load amperage 9.1
Calrod heater watts max.....875
For use on adequately wired 120V, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.


ENERGY STAR NSF UL Listed by Underwriters Laboratories

GE Triton® XL Built-In Dishwashers

	GE®				
	ENERGY STAR	ENERGY STAR	ENERGY STAR	ENERGY STAR	ENERGY STAR
	GSD6960JSS GSD6900JWW GSD6900JCC GSD6900JBB	GSD6860JSS	GSD6660GSS GSD6600GWW GSD6600GCC GSD6600GBB	GSD6260JSS GSD6200JWW GSD6200JCC GSD6200JBB	GSD6100KWW GSD6100KBB
Features					
Giant tub	●	●	●	●	●
Front appearance	Contour door	Flat door	Flat door	Flat door	Flat door
Upscale flush design	●	●	●	●	●
Full-length door design	●	●	●	●	●
Wash system	XtraClean™	XtraClean™	XtraClean	XtraClean	XtraClean
Wash arms	3 direct-feed	3 direct-feed	3 direct-feed	3 direct-feed	3 direct-feed
Wash levels	6	6	6	6	6
XtraFine™ filter	100% triple	100% triple	100% triple	100% triple	100% triple
Dual pumps and motors	●	●	●	●	●
Hard food disposer	Piranha	Piranha	Piranha	Piranha	Piranha
Sensor	XtraClean	XtraClean	XtraClean	XtraClean	XtraClean
Automatic temperature control	●	●	●	●	●
Electronic controls	Light-touch	Light-touch	Light-touch	Light-touch	Light-touch
Cycle progress indicators	Countdown display with 6 status lights	Countdown display with 6 status lights	6 status lights	1 “Clean” light, 1 “Sanitized” light	1 “Clean” light, 1 “Sanitized” light
Touchpads	10	10	10	9	9
Cycles/Options	Variable*	Variable*	Variable*	Variable*	Variable*
Last cycle memory	●	●	●	●	●
Cycles					
Anti-bacteria (NSF**)	●	●	●	●	
Pots & Pans	●	●	●	●	●
Heavy Wash					●
Normal Wash	●	●	●	●	●
China/Crystal	●	●	●	●	●
SpeedCycle (wash & dry)	●	●	●		
Rinse Only	●	●	●	●	●
Options					
Delay Start	1-9-hour	1-9-hour	2/4/8-hour	2/4/8-hour	2/4/8-hour
Hi-Temp Wash	XtraHot Wash	XtraHot Wash	XtraHot Wash	XtraHot Wash	XtraHot Wash
Hi-Temp Rinse	Auto w/XtraHot Wash	Auto w/XtraHot Wash	Auto w/XtraHot Wash	Auto w/XtraHot Wash	Auto w/XtraHot Wash
Heated Dry	●	●	●	●	●
HotStart	Automatic	Automatic	Automatic	Automatic	Automatic
Child lock	●	●	●	●	●
Racking					
Maximum capacity racking	●	●	●	●	●
Upper rack	4-position, adjustable nylon deep tiered	4-position, adjustable nylon deep tiered	Nylon deep tiered	Deep tiered	Deep tiered
Fold-down tine flexibility	1 multi-position upper; 2 lower	1 multi-position upper; 2 lower	2 lower		
Utility shelves	4 upper	4 upper	2 upper	2 upper	
Silverware basket	Super capacity 3-pc.	Super capacity 3-pc.	Super capacity 3-pc.	Super capacity 3-pc.	Super capacity
Hard countertop installation	GPF65	GPF65	GPF65	GPF65	GPF65
Calrod heater	Multi-wattage	Multi-wattage	Multi-wattage	Multi-wattage	Multi-wattage
Rinse aid dispenser	w/Indicator and adjustment	w/Indicator and adjustment	w/Indicator and adjustment	w/Indicator and adjustment	w/Indicator and adjustment
Latch	Squeeze	Squeeze	Squeeze	Squeeze	Squeeze
Quiet					
Sound insulation package	QuietPower IV	QuietPower IV	QuietPower IV	QuietPower III	QuietPower II
Tub insulation	Thinstall Plus	Thinstall Plus	Thinstall Plus	T-blanket	T-blanket
Door insulation and mastic	●	●	●	●	
QuietPower motor	●	●	●	●	●
ActiveVent system	●	●	●	●	●
Tub collar trim	●	●	●		
Electronic control system	●	●	●	●	●
PermaTuf tub and door liner	●	●	●	●	●
Appearance					
Colors available***	SS, WW, CC, BB	SS	SS, WW, CC, BB	SS, WW, CC, BB	WW, BB
Weights & Dimensions					
Height w/legs retracted (in.)	34	34	34	34	34
Height w/legs removed (in.)	33-13/16	33-13/16	33-13/16	33-13/16	33-13/16
Overall width (in.)	24	24	24	24	24
Overall depth (in.)	25-1/4 max.	25-1/4 max.	25-1/4 max.	25-1/4 max.	25-1/4 max.
Approx. shipping weight (lbs.)	90	90	90	90	90
Accessories					
Requires kit for 1/4" panel capability with trim	N/A	N/A	GPF825W/C/B	GPF825W/C/B	GPF825W/B
Requires kit for trimless 3/4" panel capability	N/A	N/A	GPF875W/C/B	GPF875W/C/B	GPF875W/B

*Sensor controlled.
**Certified by National Sanitation Foundation.
***SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.

GE Triton XL Built-In Dishwasher Dimensions—(in inches)

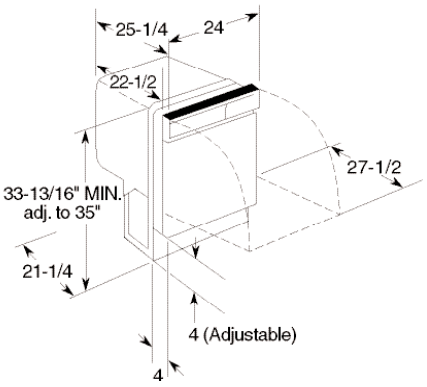

Electrical Rating

Voltage AC.....120
Hertz.....60
Total connected load amperage 9.1
Calrod heater watts max.....875
For use on adequately wired 120V, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

ENERGY STAR NSF UL® Listed by Underwriters Laboratories

GE Triton® Built-In Dishwashers


	GE®
	ENERGY STAR®
	GSD5560GSS GSD5500GWW GSD5500GCC GSD5500GBB
Features	
Wash system	TriClean™
Dual pumps and motors	●
Wash arms	3
Wash levels	6
Water filtration	100% triple
Hard food disposer	Piranha™
CleanSensor	●
Cycles	Variable*
Pots & Pans	●
Normal Wash	●
Light Wash	●
China/Crystal	●
SaniWash	●
Rinse Only	●
Options	Variable
Delay Start	2/4/8-hour
Heated Dry	●
Child lock	●
Racks, shelf & basket	
Upper rack	Super
Lower rack	Super
Utility shelves	2
Silverware basket	Super capacity
Control type	Electronic
Cycle progress indicators	6 LEDs
Touchpads	10
Hard countertop installation	GPF65
Optional heavy door spring	GPF100
Rinse aid dispenser	w/Indicator
Center throw door latch	●
Quiet	
Sound insulation package	QuietPower II
PermaTuf® tub and door liner	●
QuietPower™ motor	●
Appearance	
Colors available**	SS, WW, CC, BB
Color panels—door & access	Trimless
Weights & Dimensions	
Height w/legs retracted (in.)	34
Height w/legs removed (in.)	33-13/16
Overall width (in.)	24
Overall depth (in.)	25-3/4
Approx. shipping weight (lbs.)	85 80
Accessories	
Requires kit for 1/4" panel capability with trim	N/A GPF425W/C/B
Requires kit for trimless 3/4" panel capability	N/A GPF475

All GE dishwashers are equipped with the following: 120°F inlet water capability, Easy-Glide roller system, convection drying, horizontal mechanism, leveling screws.
*Sensor controlled.
**Colors available: SS = Stainless Steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.

Electrical Rating

Voltage AC.....120
Hertz.....60
Total connected load amperage.....8.2
Calrod heater watts.....725
For use on adequately wired 120V, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

Dimensions (in inches)

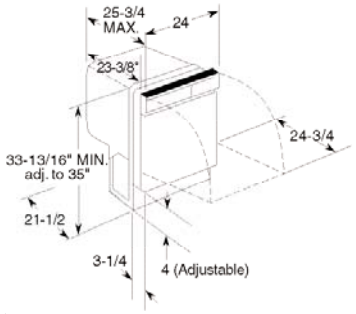


GE Nautilus™ Built-In Dishwashers

	GE	
	ENERGY STAR	ENERGY STAR
	GSD4060JSS GSD4000JWW GSD4000JCC GSD4000JBB	GSD2600GWW GSD2600GCC GSD2600GBB
Features		
Wash system	PowerScrub™	Standard
Wash levels	5	2
Water filtration	Dual	
Food disposer	Piranha	●
Cycles	6	5
Pots & Pans	●	
Heavy Wash	●	●
Normal Wash	●	●
Light Wash		Dial
Short Wash	Dial	
Plate Warmer	Dial	Dial
Rinse Only	Dial	Dial
Options	31	22
Delay Start	1-6-hour	
Heated Dry	●	●
Hi-Temp Wash	●	●
HotStart™		Dial
Racks, shelf & basket		
Upper rack	Deluxe Plus	Standard
Lower rack	Deluxe	Deluxe
Utility shelves	2	
Silverware basket	Deluxe	Deluxe
Control type	TouchTap™	Turn-to-start
Cycle progress indicator(s)	1 "Cycle On"	Dial
Touchpads	7	
Pushbuttons		6
Rinse aid dispenser	w/Indicator	●
Center throw door latch	●	●
Quiet		
Sound insulation package	QuietPower I	QuietDesign™
PermaTuf tub/door liner	●	●
QuietPower motor	●	●
Appearance		
Colors available*	SS, WW, CC, BB	WW, CC, BB
Color panels—door & access	Trimless	Trimless
Weights & Dimensions		
Height w/legs retracted (in.)	34	34
Height w/legs removed (in.)	33-13/16	33-13/16
Overall width (in.)	24	24
Overall depth (in.)	25-3/4	25-3/4
Approx. shipping weight (lbs.)	80	80
Accessories		
Requires kit for 1/4" panel capability with trim	GPF425W/C/B	GPF325W/C/B
Requires kit for trimless 3/4" panel capability	GPF475	GPF375

All GE Dishwashers are equipped with the following: 120°F inlet water capability, Easy-Glide roller system, convection drying, horizontal mechanism, leveling screws.
*Colors available: SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.

GE Built-In Dishwasher Dimensions (in inches)

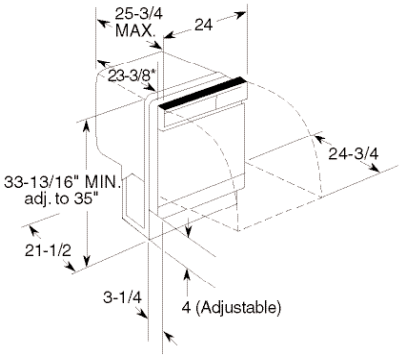

Electrical Rating

Voltage AC.....120
Hertz.....60
Total connected load amperage.....6.2
Calrod® heater watts 500
For use on adequately wired 120V, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

Listed by Underwriters Laboratories


GE Nautilus Convertible Dishwashers

	GE	
	ENERGY STAR	ENERGY STAR
	GSC3400JWW GSC3400JBB	GSC3200JWW GSC3200JBB
Features		
Wash system	PowerScrub	PowerScrub
Wash levels	5	5
Water filtration	Dual	Dual
Hard food disposer	Piranha	Piranha
Cycles	7	5
Pots & Pans	●	●
Heavy Wash	●	
Normal Wash	●	●
China/Crystal	●	
Short Wash	Dial	Dial
Plate Warmer	Dial	Dial
Rinse Only	Dial	Dial
Options	39	22
Delay Start	1-6-hour	
Heated Dry	●	●
Energy Saver	●	
Hi-Temp Wash	●	●
HotStart	●	Dial
Racks (upper/lower)	Super/Deluxe	Super/Deluxe
Silverware basket	Deluxe split w/2 cell covers	Deluxe
Cycle progress indicator	1 "Cycle On"	Dial
TouchTap controls	8	
Pushbuttons		6
Rinse aid dispenser	w/Indicator	●
Center throw door latch	●	●
Quiet		
Sound insulation package	QuietDesign	QuietDesign
PermaTuf tub and door liner	●	●
QuietPower motor	●	●
Sealed toekick	●	●
Appearance		
Colors available*	WW, BB	WW, BB
Color panels—door & access	Trimless	Trimless
Decorative wood laminate top	Woodgrain	Woodgrain
Weights & Dimensions		
Overall height w/legs extended (in.)	36-3/8	36-3/8
Overall width (in.)	24-7/8	24-7/8
Overall depth (in.)	27	27
Approx. shipping weight (lbs.)	130	130
Accessories		
Requires kit for 1/4" panel capability with trim	GPF425W/B	GPF325W/B
Requires kit for trimless 3/4" panel capability	GPF475	GPF375

*Colors available: WW = White on white, BB = Black on black (with bisque side panels).


Convertible Dishwasher Dimensions (in inches)

Po

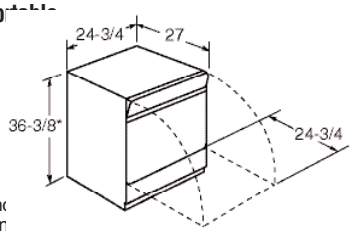

*In
ar

Built-In

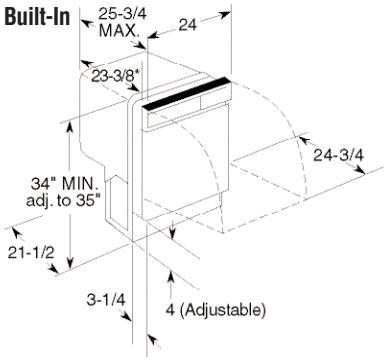


: kit number WD35M34
ting GE convertible
lt-in installation. Contains
her water valve, hardware
lete instructions for
ging a GE convertible
dishwasher for under-
the-counter installation.

GE Spacemaker® Built-In 18" Dishwasher

	GE
	ENERGY STAR
	GSM1800JWW GSM1800JBB
Features	
Tub and door liner	Stainless steel
Wash levels	2
Cycles	7
Pots & Pans	Dial
Heavy Wash	Dial
Normal Wash	Dial
Light Wash	Dial
China/Crystal	Dial
Plate Warmer	Dial
Rinse Only	Dial
Options	12
Heated Dry	Rocker
Racks (upper/lower)	Nylon
Removable upper rack	●
Utility shelves	●
Silverware basket	Standard
Control type	Turn-to-start
Cycle progress indicator	Dial
Hard countertop installation	N/A
Rinse aid dispenser	w/adjustment
120°F inlet water capability	●
Leveling screws	●
Economical/Quiet	
Tub insulation	Standard
Appearance	
Colors available*	WW, BB
Weights & Dimensions	
Height w/legs retracted (in.)	32
Overall width (in.)	18
Overall depth (in.)	22-1/2
Approx. shipping weight (lbs.)	100
Accessories	
Requires kit for 1/4" panel capability with trim	GPF18W/B

*Colors available: WW = White on white, BB = Black on black.

Spacemaker Built-In Dimensions GSM1800J (in inches)



*Width adjustable from 17-3/8" to 18".
**Meets ADA countertop height requirement of 34".

Figure 1


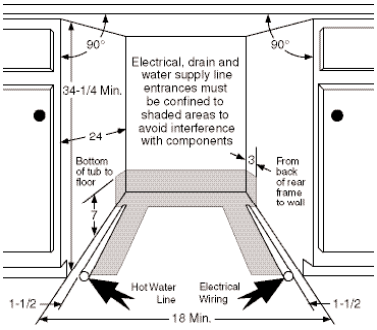


Figure 2



Dishwasher Rough-In Information

Note: Dishwasher must not be installed more than ten feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

Most of the installation work should be done before the dishwasher is moved into place. First, select a location as close to the sink as possible for ready access to water and drain lines. For proper operation and appearance of the dishwasher, the cabinet opening should be square and have dimensions as shown in Figure 1. If the dishwasher is to be installed in a corner, there must be sufficient clearance to open the door as shown in Figure 2. A minimum clearance of 2" is recommended.

Rough-in the water, electrical, and drain lines before proceeding with installation. The lines should run straight to their connections on the dishwasher.

Note: Make sure that the lines do not cross in front of the dishwasher motor or its legs.

GE Spacemaker® Under-the-Sink Dishwashers


	GE®
	ENERGY STAR® GSM2100GWW GSM2100GCC
Features	
Wash levels	2
Food disposer	●
Cycles	5
Pots & Pans	●
Normal Wash	●
Short Wash	Dial
Plate Warmer	Dial
Rinse Only	Dial
Options	12
Heated Dry	●
HotStart™	Dial
Racks, shelf & basket	
Upper rack	Spacemaker
Lower rack	Deluxe
Silverware basket	Deluxe
Control type	Turn-to-start
Cycle progress indicator	Dial
Pushbuttons	4
Hard countertop installation	GPF53
Optional heavy door spring	GPF100
Rinse aid dispenser	●
Steel door	●
Center throw door latch	●
Quiet	
PermaTuf® tub and door liner	●
QuietPower™ motor	●
Appearance	
Colors available*	WW, CC
Color panels—door & access	Trimless
Weights & Dimensions	
Height w/legs retracted (in.)	34
Overall width (in.)	24
Overall depth (in.)	25-3/4
Approx. shipping weight (lbs.)	72
Accessories	
Requires kit for 1/4" panel capability with trim	GPF325W/C
Requires kit for trimless 3/4" panel capability	GPF375

*Colors available: WW = White on white, CC = Bisque on bisque.

Note: Under-the-sink dishwashers can be installed under GE cooktop models JP201C and JP202D. Refer to cooktop installation instructions.

ENERGY STAR

Cabinet Cutout for Sink (in inches)

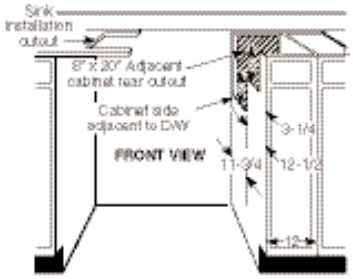


Cabinet cutouts for offset single and double bowl sinks. Dishwasher not provided with complete enclosure. Enclosures for sides, top, bottom, and back must be provided by installer at time of installation.


Stainless Steel Sinks Single- and Double-Bowl Models Dimensions (in inches)

Model Number	Overall Size		Inside Each Compartment		
	L	W	L	W	D
GPF95 (Single Bowl, R)*	25	21-1/4	21	15-3/4	5-3/8
GPF96 (Single Bowl, L)*	25	21-1/4	21	15-3/4	5-3/8
GPF97 (Double Bowl)	33	21-1/4	14	15-3/4	5-3/8

Model Number	Cutout In Countertop 1-1/2" Radius Corners		No. Of 1-1/2" Dia. Faucet Holes	Ship. Wt. Lbs.
	L	W		
GPF95 (Single Bowl, R)*	24-3/8	20-5/8	3 or 4**	10
GPF96 (Single Bowl, L)*	24-3/8	20-5/8	3 or 4**	10
GPF97 (Double Bowl)	32-3/8	20-5/8	3 or 4**	12-1/2


Note: Drain opening size is 3-1/2".
Above models are fully sound deadened.
*Suffix "L" or "R" means drain outlet is located in upper left or right corner of sink compartment.
**All have four holes, but one hole has a removable plug.

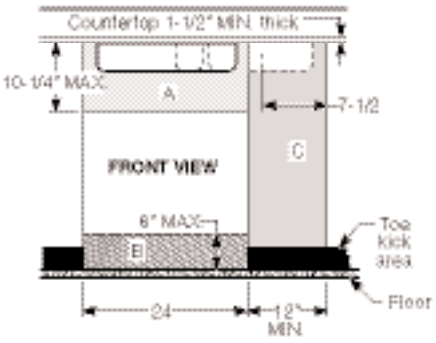

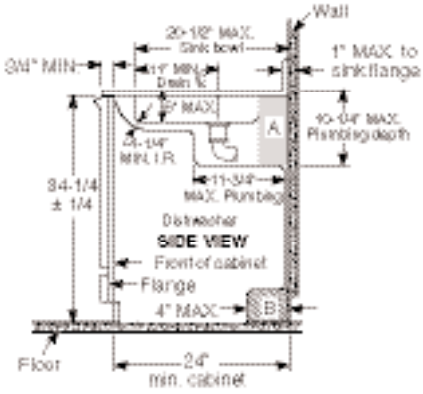

Either single- or double-bowl sink may be used, centered or offset, as shown in the front illustration above. The 20-1/2" max. dimension from wall to front of sink bowl must be accurate if dishwasher is to fit properly under sink. Water lines to sink faucet and drain from sink can be run through area "A". HOT WATER line to dishwasher is installed in area "B". Garbage disposer, water lines to faucet, trap, waste air gap and water cut-off valve are installed in 12" wide cabinet shown in area "C". Sink opening for garbage disposer must be dimensioned as shown in front view, area "C" above (7-1/2"). This will provide clearance for disposer and plumbing in cabinet "C" when using double bowl sink. If the sink bowl is more than 20-1/2" max. specified distance from the wall, or if the base cabinet is less than the 24" min. depth from the wall, a gap between the tub front flange and the front of the base cabinet may result.

Plumbing/Electrical Rough-In (in inches)

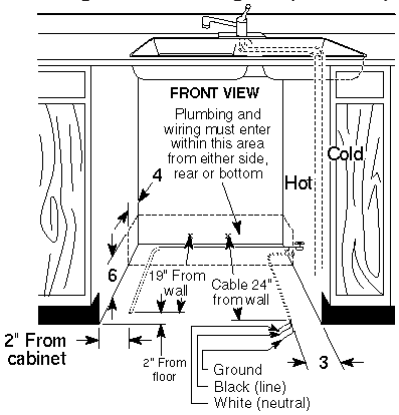


Plumbing: Hot Water Only: Use 3/8" O.D. copper tubing or 1/2" O.D. plastic tubing min. inlet line. Water valve has 3/8" internal threads. Hand cut-off valve is recommended.

Electrical: Fuse circuit with 15 amp or 20 amp standard fuse or circuit breaker. Total amp load is 6.2. Dishwasher operates on 120V, 60 Hz power. Two-wire cable (14 ga. min.) with ground must be installed.


Note: All rough-in, both plumbing and electrical, must be completed before the dishwasher is installed. All plumbing and electrical work must be in accordance with local codes.

Specifications: Inlet Water Temperature Recommended: Minimum 120°F at dishwasher. Inlet Water Pressure Required: 15 to 120 lbs./sq. in.

Rough-In for Installation with Disposer (in inches)

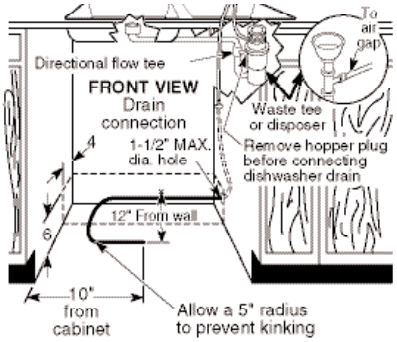

Rear View Plumbing Arrangement (in inches)

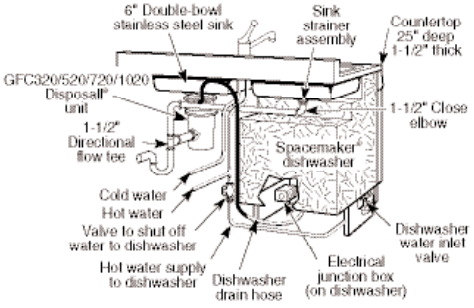

A close-fitting elbow or special shallow sink strainer is necessary to provide clearance between sink drain and dishwasher. Dishwasher furnished with 1/2" I.D. drain hose, 78" long. If using copper tubing, 2" length of 1/2" I.D. rubber hose must be provided to connect copper tubing to pump outlet. Disposer should have 7/8" I.D. dishwasher drain connector.

Dishwasher Accessories

Side Panel for All GE Models:

Contains one panel and adjustable toekick for end cabinet installation of built-in model. Does not attach to dishwasher.
Specify color: GPS5WW—White,
GPS5CC—Bisque

NOTE: S = Stainless steel, W = White, C = Bisque, B = Black

Wood Panel Capability:

Model: GSM1800.

GPF18W/B—1/4" panel trim kit

Models: GSD2600, GSC3200 and GSM2100.

GPF325W/C/B—1/4" panel trim kit (door and access)

GPF375—3/4" panel trim kit (door and access [GPF100 heavy-duty spring kit included])

Models: GSD5500 and GSC3400.

GPF425W/C/B—1/4" panel trim kit (door and access)

GPF475—3/4" panel trim kit (door and access [GPF100 heavy-duty spring kit included])

Model: PDW8700, PDW8500, PDW7700, GSD6600, GSD6200 and GSD6100.

GPF825W/C/B—1/4" panel trim kit (door)

GPF875W/C/B—3/4" panel trim kit (door)

Spacemaker Dishwasher Accessories:

Model: GSM2100.

GPF95—Stainless sink for Spacemaker dishwasher–single bowl 21-1/4" x 25". Drain hole on right; elbow and strainer included

GPF96—Stainless sink for Spacemaker dishwasher–single bowl 21-1/4" x 25". Drain hole on left; elbow and strainer included

GPF97—Stainless sink for Spacemaker dishwasher–double bowl 21-1/4" x 33". Elbow and strainer included

Optional Dishwasher Accessories:

GPF53—Brackets for under non-wood countertop installation (Spacemaker Under-the-Sink only)


GPF65—Brackets for under non-wood countertop installation (Triton® XL, Triton and Nautilus™)

GPF100—Heavy spring kit for custom door panel weighing more than 4 lbs. (Triton and Nautilus only)

GPF410S/W/C/B—Trimless panel kit for electronic models


GPF310W/C/B—Trimless panel kit for pushbutton models

Wood Insert Cutout Dimensions (in inches)
Kits: GPF18W/B, GPF825 and GPF875

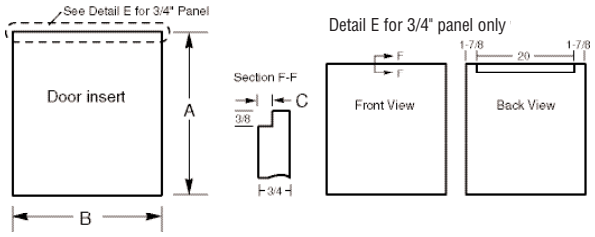

Kit	A	B	C	Panel Thickness
GPF18W/B	22-3/16	17-3/16	N/A	1/4
GPF825	25-1/16	23-1/2	N/A	1/4
GPF875	25-7/16	23-3/4	1/4	3/4

Wood Insert Cutout Dimensions (in inches)
Kits: GPF325, GPF375, GPF425 and GPF475




Kit	A	B	C	Panel Thickness
GPF325	18-7/8	23-9/16	3-11/16	1/4
GPF375	18-15/16	23-5/8*	3-3/4 to 4-1/4**	3/4
GPF425	19-3/4	23-9/16	3-11/16"	1/4
GPF475	19-7/8	23-5/8*	3-11/16 to 4-1/4**	3/4

*Bottom of panel must be notched 1-1/2" x 1/2" to clear access panel. (See illustration above)

**Adjustment required to match adjacent cabinet fronts due to leveling adjustment, 4" nominal.

Custom Panel for Model PDW9700JII

Dishwasher requires custom panel.

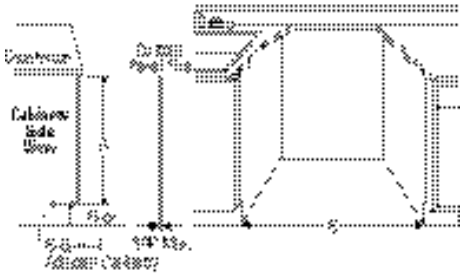

The most common panel dimensions are 30-1/4"H and 23-3/4"W.

STEP A: Determine custom panel height

1. Measure Dimension A from underside of countertop to bottom of adjacent cabinets.
2. Subtract 1/4". This allows a 1/4" clearance gap between the underside of the countertop and the top of the dishwasher door.

Height is equal to A minus 1/4"


STEP B: Determine custom panel width

1. Measure dimension B, the rough opening width.
2. Subtract 1/4" for clearance (1/8" on each side).

Width is equal to B minus 1/4"

Note: 23-1/8" min. panel width and 26-1/4" min. panel height are required to cover the door frame. Panel height varies depending on installation. Consideration must be given to door swing clearance above the toekick.

GE Profile and GE Dishwashers Installation Information (in inches)

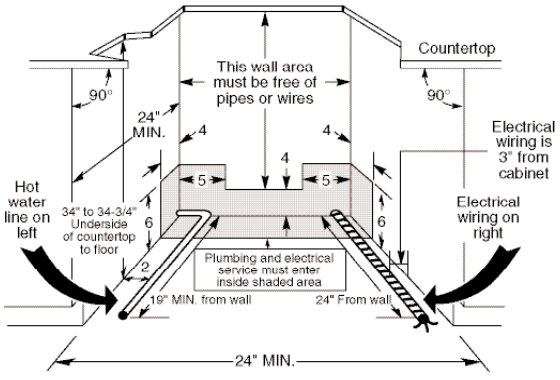

Dishwasher Rough-In Information

Note: Dishwasher must not be installed more than ten feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

Note: If a flush look is needed, a 25" base cabinet needs to be used (except Profile and Triton XL models).

The power cord and connections must comply with the National Electrical Code Section 422 and/or local codes and ordinances. The cord must be no longer than six feet from the junction box to the receptacle.

GE Disposall® — Food Waste Disposer

	GE® Continuous Feed								Batch Feed
	GFC1020F	**GFC720F**	**GFC530F**	**GFC535F**	**GFC520F**	**GFC525F**	**GFC320F**	**GFC325F**	**GFB760F**
Features									
Motor horsepower	1	3/4	1/2	1/2	1/2	1/2	1/3	1/3	3/4
Control method	Wall switch	Wall switch	Wall switch	Wall switch	Wall switch	Wall switch	Wall switch	Wall switch	Stopper
Feed type	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Batch
Power connection	Direct wire	Direct wire	Direct wire	Line cord	Direct wire	Line cord	Direct wire	Line cord	Direct wire
Impellers									
Dual-swivel	●	●	●	●	●	●	●	●	●
Jam resistant	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●
Armature shaft material	Cold-rolled carbon steel	Cold-rolled carbon steel	Cold-rolled carbon steel	Cold-rolled carbon steel	Cold-rolled carbon steel	Cold-rolled carbon steel	Cold-rolled carbon steel	Cold-rolled carbon steel	Cold-rolled carbon steel
Grinding speed (RPMs)	2,800	2,700	2,600	2,600	2,600	2,600	1,900	1,900	2,700
Capacity	Super	Super	Extra-large	Extra-large	Large	Large	Large	Large	Super
Mounting type	EZ-Mount	EZ-Mount	EZ-Mount	EZ-Mount	EZ-Mount	EZ-Mount	EZ-Mount	EZ-Mount	EZ-Mount
Turntable material	Stainless	Stainless	Stainless	Stainless	Galv. steel	Galv. steel	Galv. steel	Galv. steel	Stainless
Two-level precutter	●	●	●	●	●	●	●	●	●
Stainless steel sink flange	●	●	●	●	●	●	●	●	●
Manual reset overload protector	●	●	●	●	●	●	●	●	●
Splash guard	●	●	●	●	●	●	●	●	
Sink stopper	●	●	●	●	●	●	●	●	●
Dishwasher drain connector	●	●	●	●	●	●	●	●	●
Drain elbow	●	●	●	●	●	●	●	●	●
Quiet									
Sound insulation package	QuietPower™ III	QuietPower II	QuietPower I	QuietPower I	Standard	Standard	Standard	Standard	QuietPower II
Weights & Dimensions									
Approx. shipping weight (lbs.)	14.9	12.45	9.6	9.9	8.8	9.1	8.4	8.7	13.75
Net weight (lbs.)	13.2	10.7	8.05	8.35	7.8	8.1	7.4	7.7	11
Dishwasher inlet diameter (in.)	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4
Drain outlet diameter (in.)	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2
Power Ratings									
Volts, Hertz, Amps	120; 60; 7.0	120; 60; 6.0	120; 60; 4.5	120; 60; 4.5	120; 60; 4.5	120; 60; 4.5	120; 60; 4.0	120; 60; 4.0	120; 60; 6.0
Warranty*									
One-year full replacement							●	●	
One-year full replacement plus One-year limited replacement					●	●			
One-year full replacement plus Two-year limited replacement			●	●					
One-year full replacement plus Four-year limited replacement		●							●
One-year full replacement plus Six-year limited replacement	●								

*See written warranty for details.

Disposer Accessories:

Colored sink flanges


GPF76—White
GPF77—Almond
GPF78—Bisque

Built-In Compactors

	GE Profile™
	GCG1540FSS, GCG1530FWW, GCG1550FCC, GCG1520FBB
Features	
Cycle time	27 seconds max., 14 seconds min.
Drive system	2-Point
Motor horsepower	1/3
Compression ratio (average)	75% reduction of volume
Ram force (lb.) (max.)	2,300
Front level legs and rear wheels	●
Capacity	1.4 cu. ft.
Side release bin	●
Toe/foot pedal drawer opener	●
Lock/start control w/removable key	●
Automatic anti-jam	●
Slide-out drawer	●
Appearance	
Color appearance*	SS, WW, CC, BB
Color-matched	●
Heavy-gauge steel construction	●
1/4" panel capability	●
Weights & Dimensions	
Total shipping weight (lbs.)	152
Total appliance weight (lbs.)	141
Overall height (in.)	34-1/8 to 34-1/2
Overall width (in.)	15
Overall depth (in.)	24-1/4
Cutout dimensions H x W x D (in.)	34-1/4 x 15-1/8 x 24-3/4
Clearance for drop-down drawer side	6" or more on right side
Drawer extension for removal	23" or more in front of appliance
Custom panel size H x W (in.)	23-15/16 x 14-5/8
Accessories	
Compactor bags (5 included)	WC60X5017
Warranty	
Full one-year warranty**	●

*Colors available: SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.
**See written warranty for details.

Compactor Dimensions (in inches)



Compactor Accessories:

New 1/4" panel trim kits (color-matched)

GPF82S—Stainless steel
GPF82W—White
GPF82C—Bisque
GPF82B—Black

Answers that click!

GE puts everything you need at your fingertips.



GE Appliances web site — 16 million visitors a year!
Visit us at GEAppliances.com

Everything you need to know about GE products is here. Access up-to-date information, find out "what's new," obtain dimensions, get installation tips and more. Extremely user-friendly, this one-stop site lets you research by brand, category or model number and even buy online through a local GE dealer.

GE Answer Center® saves you time. 800.626.2000

This 24-hour-a-day, 7-day-a-week service provides answers on product features, installation, service and more.

A Century of Quality and Innovation

For more than a century, GE has been committed to producing innovative products that change the way people live. The result of thorough research and rigorous testing, GE appliances are designed for years of dependable performance. Today, the GE tradition of quality and innovation continues.

GE Appliances

GE Consumer & Industrial
GE Company
Louisville, Kentucky 40225
GEAppliances.com

As an ENERGY STAR® partner, GE has determined that the appliances marked with the ENERGY STAR logo meet the ENERGY STAR guidelines for energy efficiency.

Before purchasing an appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your retailer or GEAppliances.com

GE has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.

© 2003 GE Company
Pub. No. 5-S054 PC37304