

### Features

- Clean lines and streamlined style add contemporary appeal to any bathroom
- 14" apron height for easy entry and exit
- Standard size simplifies remodeling
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation
- Safeguard® slip-resistant surface provides excellent traction underfoot
- Wide ledges for extra storage space
- Integral apron
- Integral lumbar support

### Material


- KOHLER® enameled cast iron

### Installation

- Right drain
- Alcove
- Alcove

### Recommended Products/Accessories

- K-7213 27" Cable Bath Drain
- K-7214 27" Cable Bath Drain
- K-706000-D3 Frameless Sliding Bath Door
- K-706000-L 62" H sliding bath door with 1/4"-thick glass
- K-706004-D3 Frameless Sliding Bath Door
- K-706004-L Frameless Sliding Bath Door
- K-23726 Drain treatment
- K-23725 Cast iron cleaner

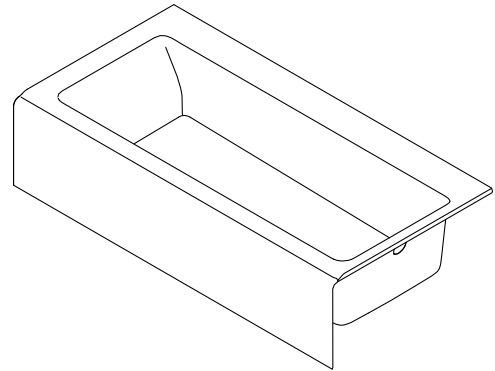

ADA

### Codes/Standards






ASME A112.19.1/CSA B45.2  
ASTM F462  
ADA  
ICC/ANSI A117.1

### KOHLER® Enameled Cast Iron Bath and Shower Base Lifetime Limited Warranty


See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color   | Code | Description |
|---|------|-------------|
|  | 0    | White       |
|  | 96   | Biscuit     |
|  | 17   | Teal        |
|  | 34   | Fresh Green |
|  | 42   | Aspen Green |

No change in measurement if connected with drain illustrated. (K-37383)

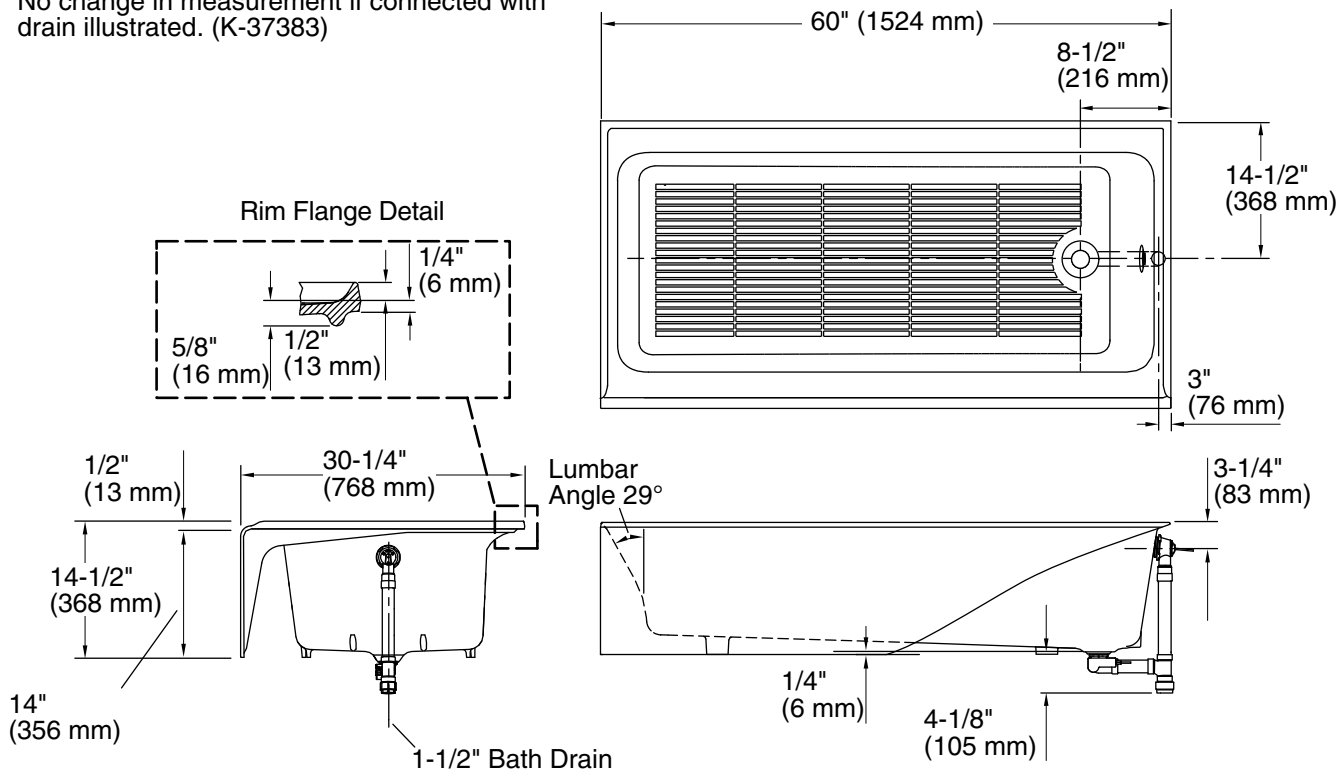

## Technical Information

All product dimensions are nominal.

|                        |   |
|------------------------|---|
| Drain location:        | Right   |
| Basin area, bottom:    | 48-3/4" x 19-5/16" (1238 mm x 491 mm)             |
| Basin area, top:       | 54-11/16" x 21-3/16" (1389 mm x 538 mm)           |
| Weight:                | 310 lbs (140.6 kg)                                |
| Minimum floor load:    | 52 lbs/ft <sup>2</sup> (253.9 kg/m <sup>2</sup> ) |
| Water depth:           | 9" (229 mm)                                       |
| Water capacity:        | 32.6 gal (123.4 L)                                |
| Minimum flat for door: | 2-5/8" (66 mm)                                    |

## Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.