


ASSEMBLY AND INSTALLATION INSTRUCTIONS

LK38812



WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.

Hardware Package (included): For Light Kit



Hardware Package (included): For Semi-Flush

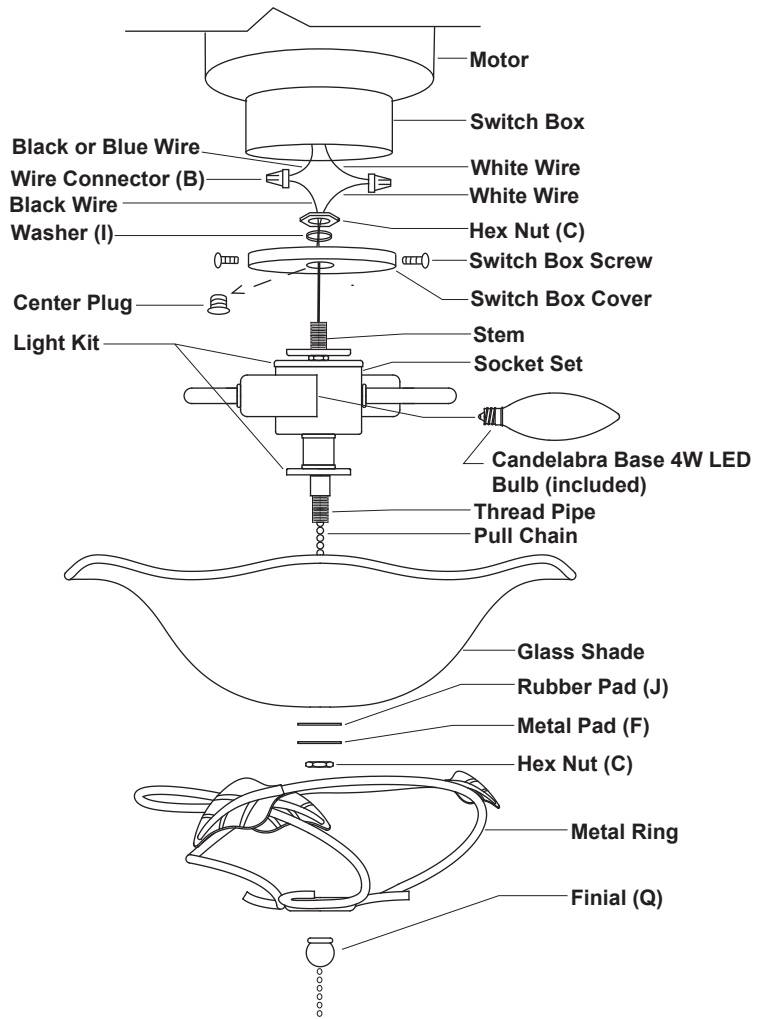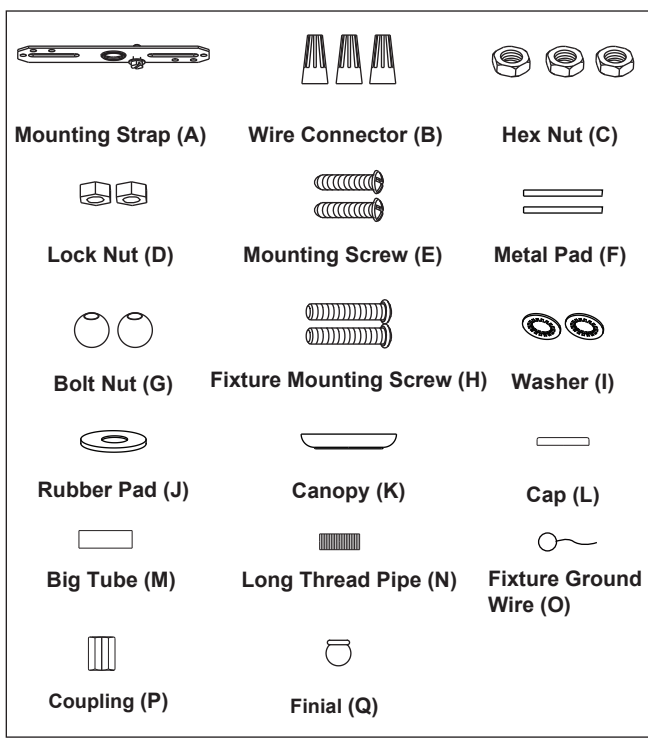

Installation Steps

Turn off the power at fuse or circuit box.

For Light Kit:


1. Remove the switch box cover from the switch box of the fan by loosening the three switch box screws.
2. Unscrew the center plug from the switch box cover and discard it.
3. Thread the wires through the switch box cover, washer (I) and hex nut (C), then attach the stem of the light kit to the hole of the switch box cover and secure it with the washer (I) and hex nut (C).
4. Pull out the wires from the switch box. Make wire connections using the wire connectors (B):
 - The black wire from the light kit to the black or blue wire from the fan.
 - The white wire from the light kit to the white wire from the fan.
 Carefully put the wires back into the switch box.

5. Restore the switch box cover back to the switch box using switch box screws.
6. Install bulbs (included). See relamping label at socket area or packaging for maximum allowed wattage.
7. Thread the pull chain through the glass shade, rubber pad (J) and metal pad (F), then install them up to the light kit by using a hex nut (C).
8. Thread the pull chain through the metal ring, then install it up to the glass shade by using the finial (Q).
9. Turn on the power at the main fuse or circuit breaker box. (You can control the lights with the pull chain.)

For Semi-Flush :





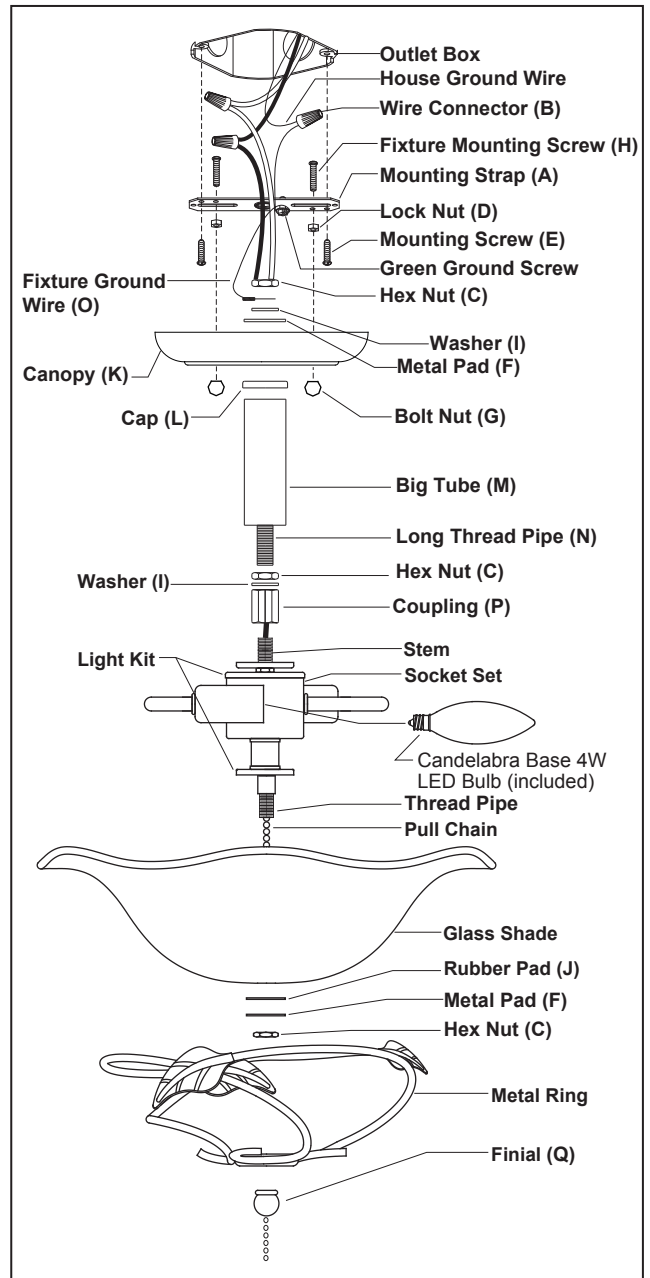














1. Take out the parts from the hardware package For Semi-Flush.
2. Attach two fixture mounting screws (H) to the mounting strap (A), and secure it with two lock nuts (D). Adjust the length of the fixture mounting screws (H) if necessary.
3. Attach the mounting strap (A) to the outlet box by using two mounting screws (E).
4. Thread the fixture wires through the coupling (P), washer (I), hex nut (C), long thread pipe (N), big tube (M), cap (L), canopy (K), metal pad (F), washer (I), fixture ground wire (O) and another hex nut (C).
5. Secure the coupling (P) onto the stem on the top of the light kit. Then screw the long thread pipe (N) into the coupling (P), then secure it with a hex nut (C).
6. Slip the big tube (M), cap (L) with the open side facing downward and the canopy (K) down through the long thread pipe (N), secure them together with a metal pad (F), washer (I), fixture ground wire (O) and hex nut (C).
7. Cut the redundant wires if necessary. Pull out the outlet wires and the house ground wire from the outlet box. Make wire connections using the wire connectors (B):
 - Connect the black wire from fixture to the black wire from power source.
 - Connect the white wire from fixture to the white wire from power source.
 - Attach the fixture ground wire (O) to the mounting strap (A) with the green ground screw, then connect it to the house ground wire with the wire connector (B).
 Carefully put wires back into the outlet box.
8. Attach the canopy (K) to the mounting strap (A), and secure it with the bolt nuts (G).
9. Follow steps 6~9 as For Light Kit.


Turn on the power at fuse or circuit box.




The following parts are available for reorder if damaged or missing.

Spare Parts List:


 Hex Nut (C)	 Washer (I)	➔ Assembly Kit 6089MM (1 SET)				
 Mounting Strap (A)	 Wire Connector (B)	 Hex Nut (C)	 Lock Nut (D)	 Mounting Screw (E)	 Metal Pad (F)	➔ Assembly Kit 6090MM (1 SET)
 Bolt Nut (G)	 Fixture Mounting Screw (H)	 Washer (I)	 Rubber Pad (J)	 Canopy (K)	 Cap (L)	
 Big Tube (M)	 Long Thread Pipe (N)	 Fixture Ground Wire (O)	 Coupling (P)	 Finial (Q)		

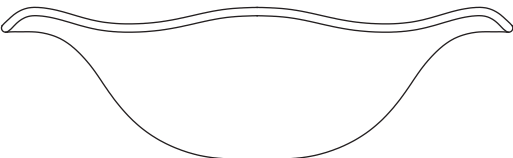

Glass Shade
938812



LED Bulb
8096LD

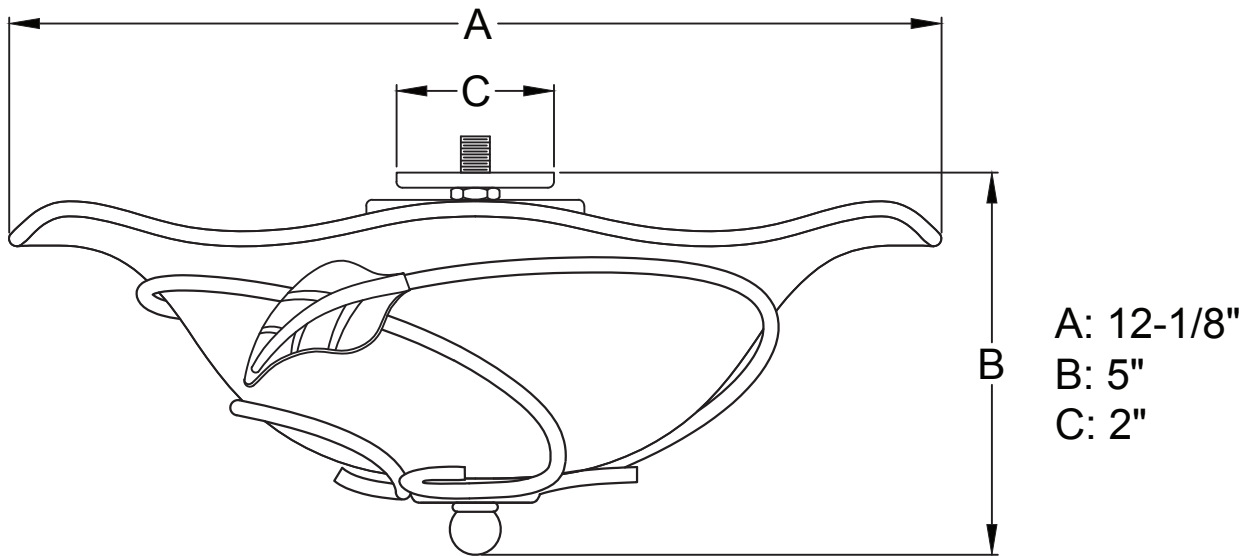

1 Year Warranty

Vaxcel warrants all of our products against defects in workmanship and finishes for one year following the date of shipment.

Exclusions: This warranty does not include the failure of products from extreme acts of nature; environmental conditions not suited for the products intended use; operation in temperatures outside of the range specified in the instruction manual; usage with improper power supply, power surges or dips. For coastal locations, some corrosion is considered normal for the environment.

Vaxcel reserves the right to repair, replace or issue a credit for any properly installed product, provided it is returned per RMA instruction. This warranty is limited to the cost of the product only and does not extend to transportation, installation or replacement costs.

How can warranty service be obtained?

info@vaxcel.com
1-800-482-9235