

INSTALLATION INSTRUCTIONS

WARNING IMPORTANT: NEVER attempt any work without shutting off the electricity.

- Read all instructions before installing.
- System is intended for installation by a qualified electrician in accordance with the National Electrical Code and local regulations.
- Go to the main fuse box, or circuit breaker. Place the main power switch in the "OFF" position and unscrew the fuse(s) or switch "OFF" the circuit breaker switch(es) that control the power to the fixture or room that you are working on.
- Place the wall switch in the "OFF" position.
- Supply conductors (Power Wires) Connecting the fixture must be rated minimum 90°C. If uncertain, consult an electrician.

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape



Phillips screwdriver




Flat blade screwdriver



Pliers



Wire strippers

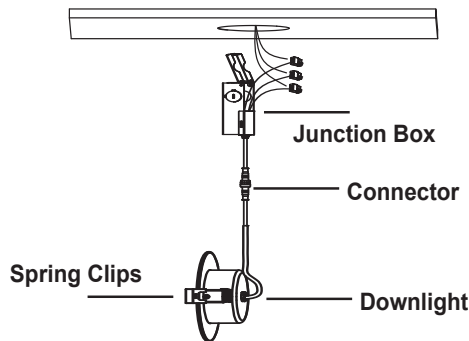

NOTE: IMAGES MAY NOT REFLECT YOUR EXACT MODEL AND ARE FOR REFERENCE PURPOSES ONLY.

1. Turn power OFF from the electrical panel prior to installation
2. Using drywall screws screw the plate to the joist increment notches on the plate will help when aligning multiple plates. (Fig. 1)
3. Take note of the plates cut hole locations from the corner, the roof and fixture. Spacing to find the plates after the drywall installation. (Fig. 1)
4. Open the junction box cover and remove the appropriate knockout(s) on the side panel.(Fig. 2)
5. Insert the electrical supply cable through the knockout and secure with a cable connector.
6. Using quick-connect push-in terminals, connect the ground wire to the green wire terminal; black wire to black wire terminal; white wire to white wire terminal (Fig. 2)
7. Place all wiring and connections back into the box and close the cover. Connect the driver to the light panel.
8. Select desired color temperature using the CCT switch located on the driver box.
9. Insert Junction box through the mounting hole (Fig. 3).
10. Push spring-loaded clips on the fixture upwards and insert fixture base into the mounting hole. Release the clips and fixture will be pulled flush to the ceiling.(Fig.4)

VERIFIED LIST OF TESTED DIMMERS

Brand	Model No.
LUTRON	DVCL-153P-AL
	DVCL-253P-WH
	AYCL-253P-LA
	PD-6WCL-WH-R
Leviton	IPL06-10Z
	IPE04-1LZ

MAINTENANCE

- Do not modify this fixture. Any modifications may render the product unsafe and void warranty.
- This product is suitable for wet locations.

IMPORTANT!

If the control is not paired properly to LED fixtures, irreparable damage may occur.

FCC INFORMATION

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Fig. 1

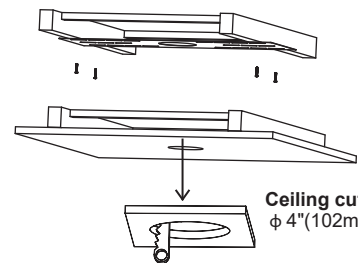


Fig. 2

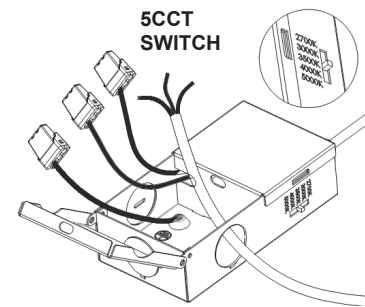


Fig. 3

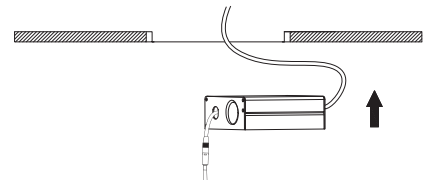


Fig. 4

