

EVELYN WOOD QUEEN BED


ASSEMBLY INSTRUCTIONS



PARTS PACKING CONFIGURATIONS


BOX #1

A. HEADBOARD 1PC




BOX #2

B. FOOTBOARD 1 PC
C. SLAT ROLL 1 SET
D. SUPPORT LEG 5 PCS

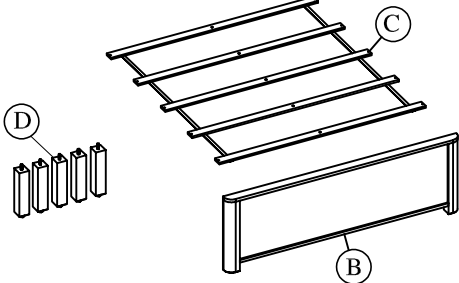


BOX #3

E. SIDE RAIL 2 PCS



FULLY ASSEMBLED

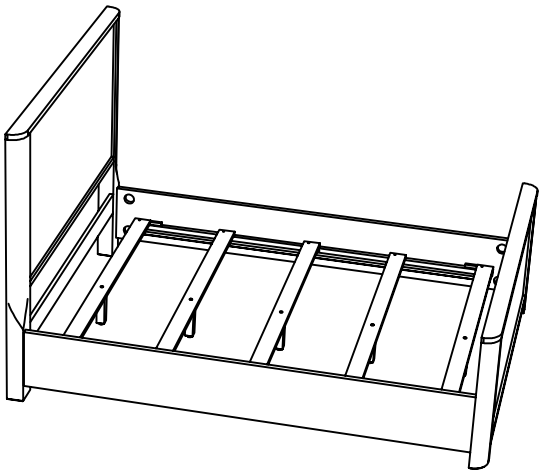


HARDWARE KIT PACKED IN BOX #2

NO.	DESCRIPTION	IMAGE	QTY
1	THREADED BOLT (5/16"x80mm)		8 PCS
2	HEX NUT (5/16")		8 PCS
3	HALF MOON WASHER		8 PCS
4	WRENCH		1 PC
5	WOOD SCREW (4x30mm)		10 PCS
6	ALLEN KEY		1 PC



STEP 1

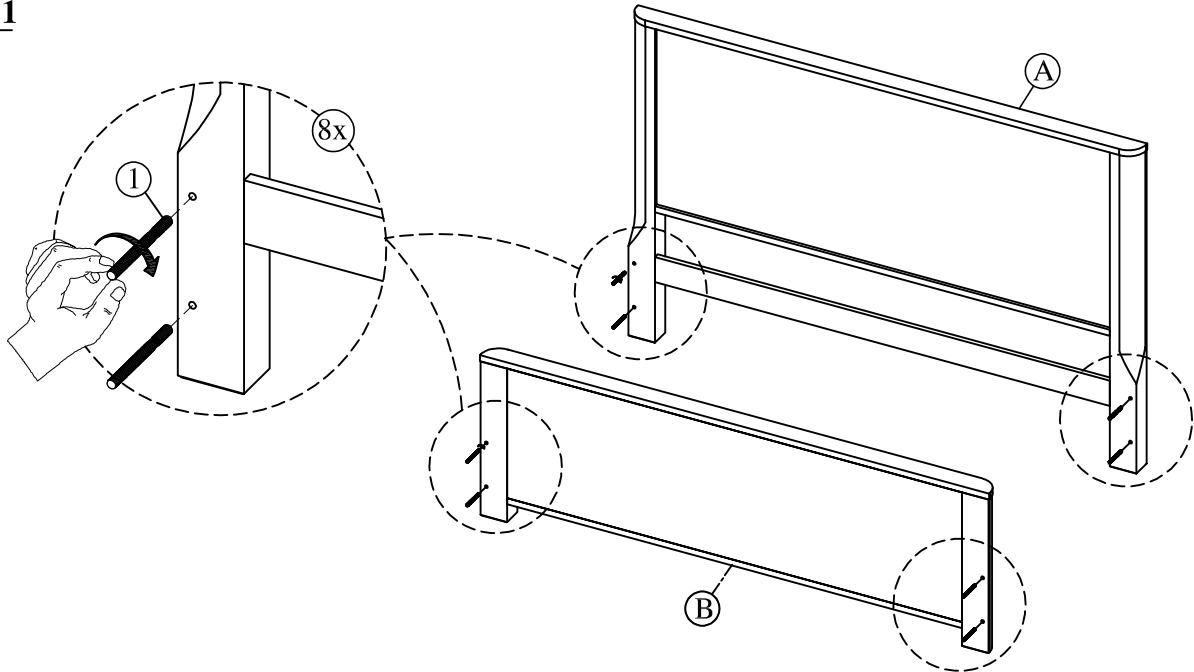


EVELYN WOOD QUEEN BED


ASSEMBLY INSTRUCTIONS



STEP 2

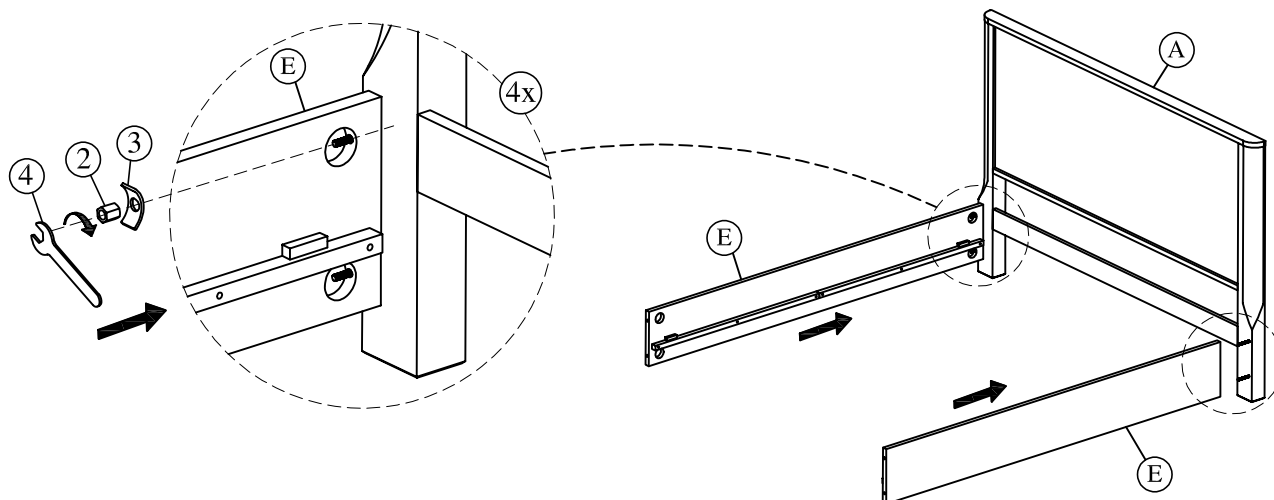


STEP 3

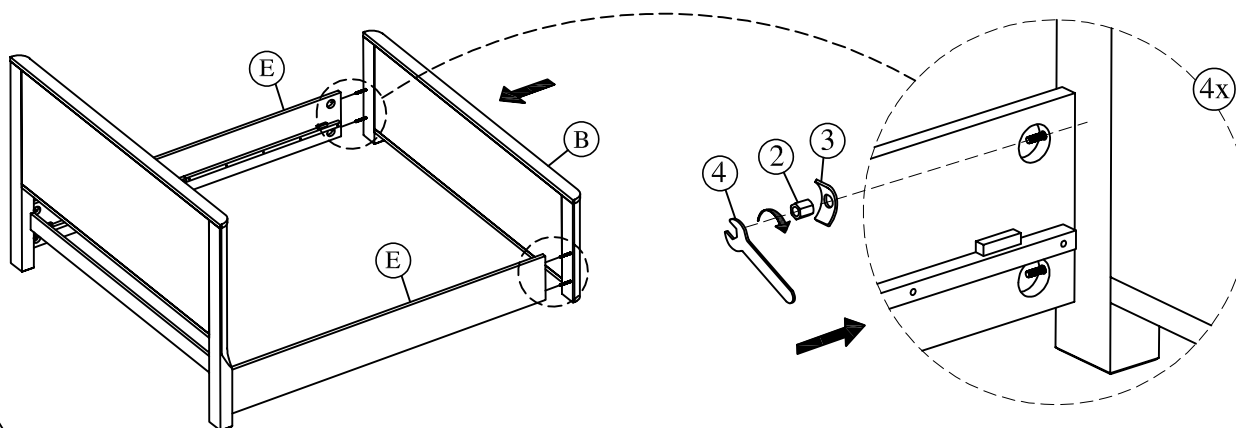

STOP

IF USING BED WITH AN ADJUSTABLE MATTRESS BASE, SKIP STEPS 4, 5, 6 & 7
AND REFERENCE APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT.
IF USING BED FRAME WITH STANDARD BOX SPRING OR FOUNDATION, CONTINUE TO STEP 4


STEP 4

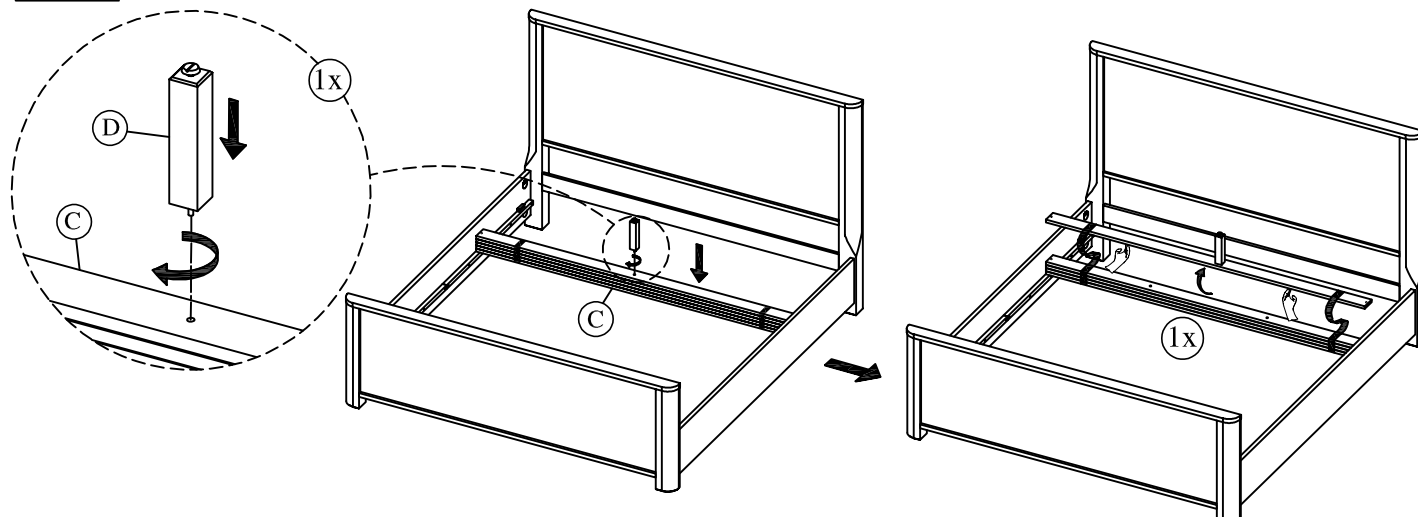


EVELYN WOOD QUEEN BED ASSEMBLY INSTRUCTIONS

MODUS
FURNITURE

STEP 5

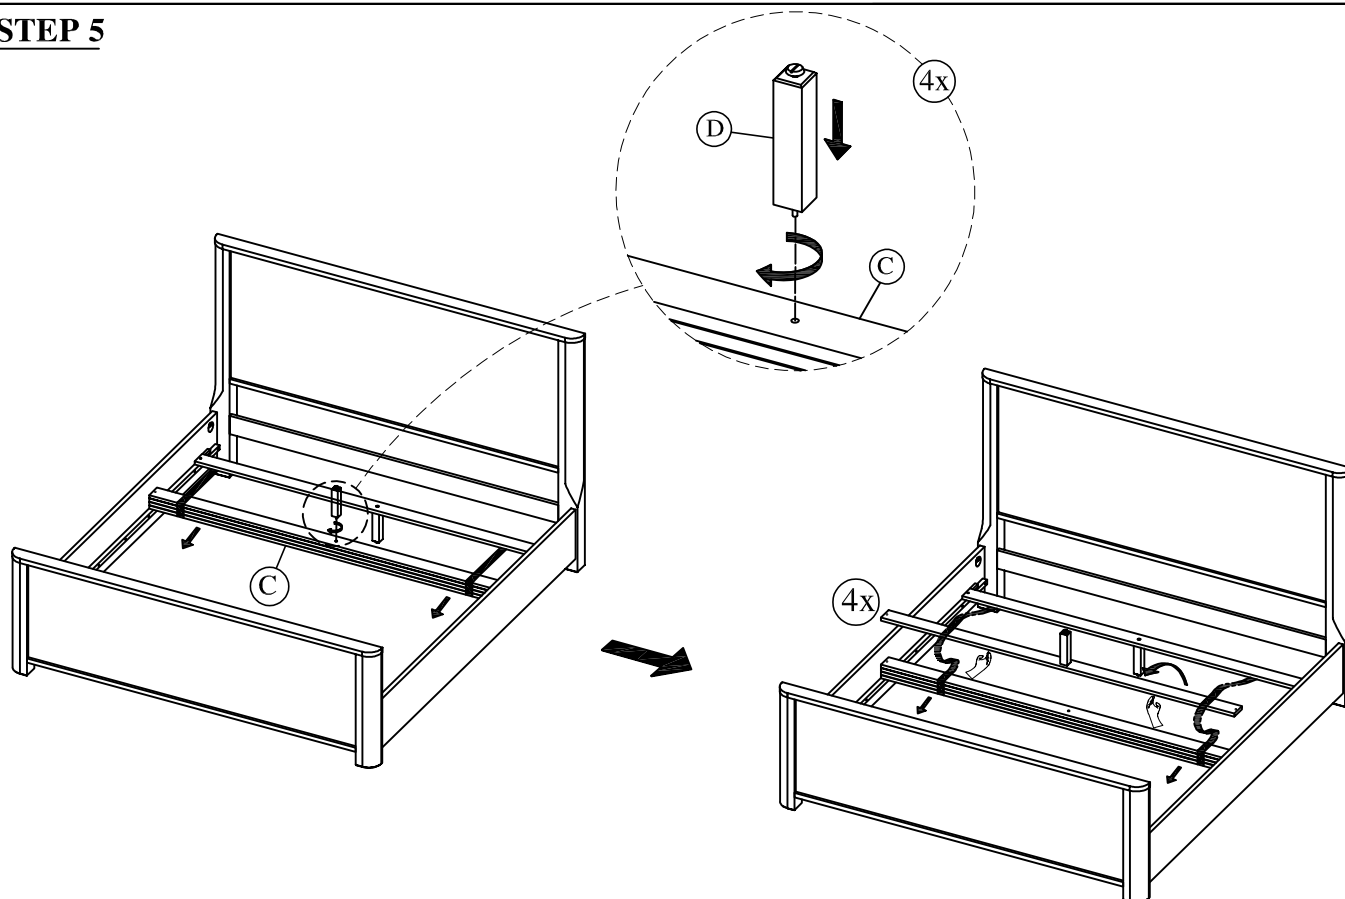


STEP 6

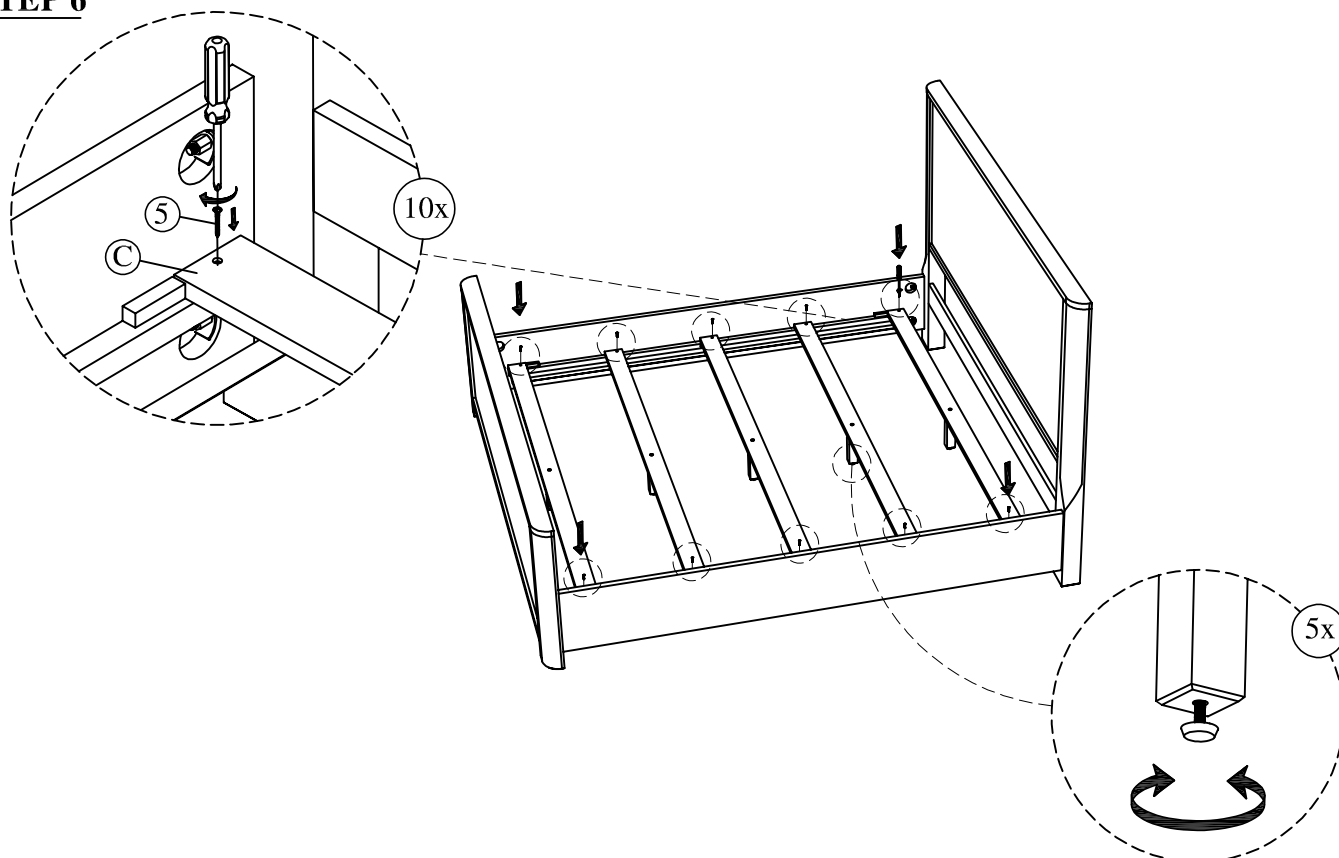

EVELYN WOOD QUEEN BED ASSEMBLY INSTRUCTIONS



STEP 7

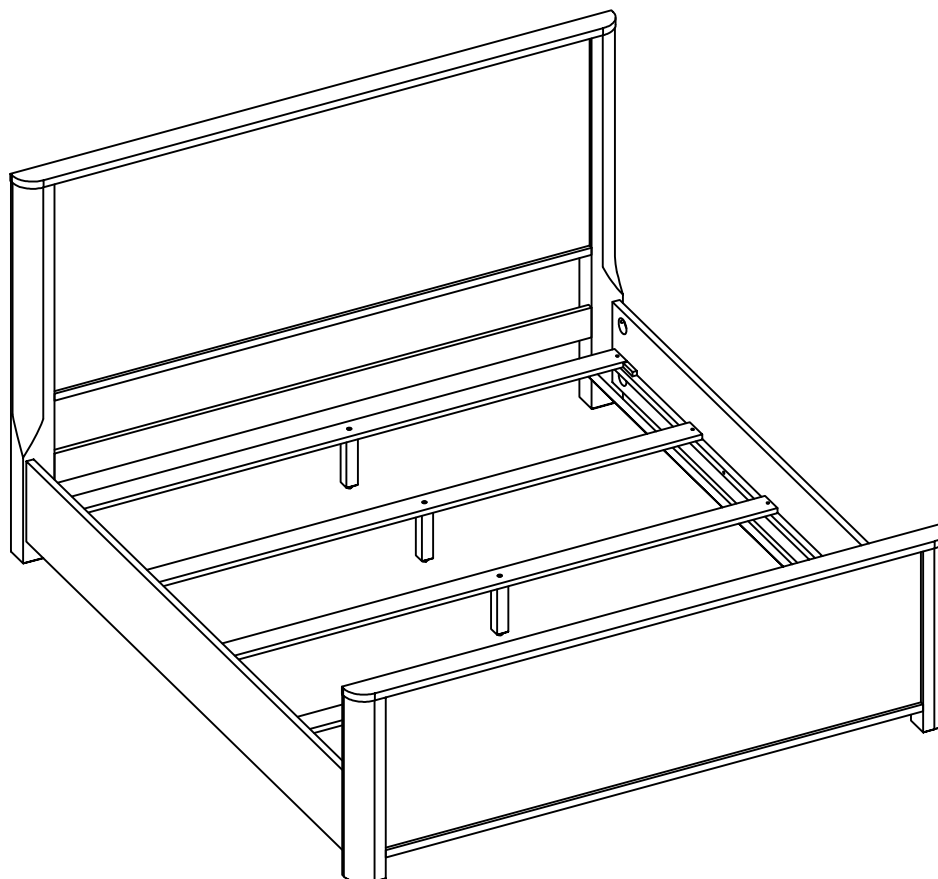


ASSEMBLY COMPLETE

INSTRUCTIONS FOR ADJUSTING LEVELERS:

Position the bed in your space and locate the leveler under each leg support.

Turn the leveler counter-clockwise to extend and clockwise to retract it.

Adjust each leveler until each leg support is applying equal, upward pressure on the slat.



MAINTENANCE INSTRUCTIONS:

- Periodically check all fittings and tighten if necessary, as they can loosen over time.
- Always remove box spring and mattress before moving the bed.
- Lift the bed when moving it. Dragging the bed can damage the center support.
- Readjust levelers after moving the bed.

EVELYN WOOD QUEEN BED ASSEMBLY INSTRUCTIONS



APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT

AN ADJUSTABLE MATTRESS BASE IS A FREESTANDING MATTRESS SUPPORT THAT SITS WITHIN THE PERIMETER OF THE BED FRAME.

IF USING THIS BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION THESE INSTRUCTIONS DO NOT APPLY.

PRE-ASSEMBLED SIDE RAIL CLEATS OBSTRUCT ADJUSTABLE BASE INSTALLATION AND OPERATION. FOLLOW THESE INSTRUCTIONS TO REMOVE THEM.


THE FOLLOWING PARTS ARE NOT REQUIRED FOR ADJUSTABLE MATTRESS BASE INSTALLATION:

C. SLAT ROLL : 1 SET
D. SUPPORT LEG : 5 PCS

5. WOOD SCREW (4x30mm): 10 PCS

STEP #1:

USE ALLEN KEY (6) TO UNSCREW ALLEN BOLTS AND REMOVE PRE-ASSEMBLED SIDE RAIL CLEATS.

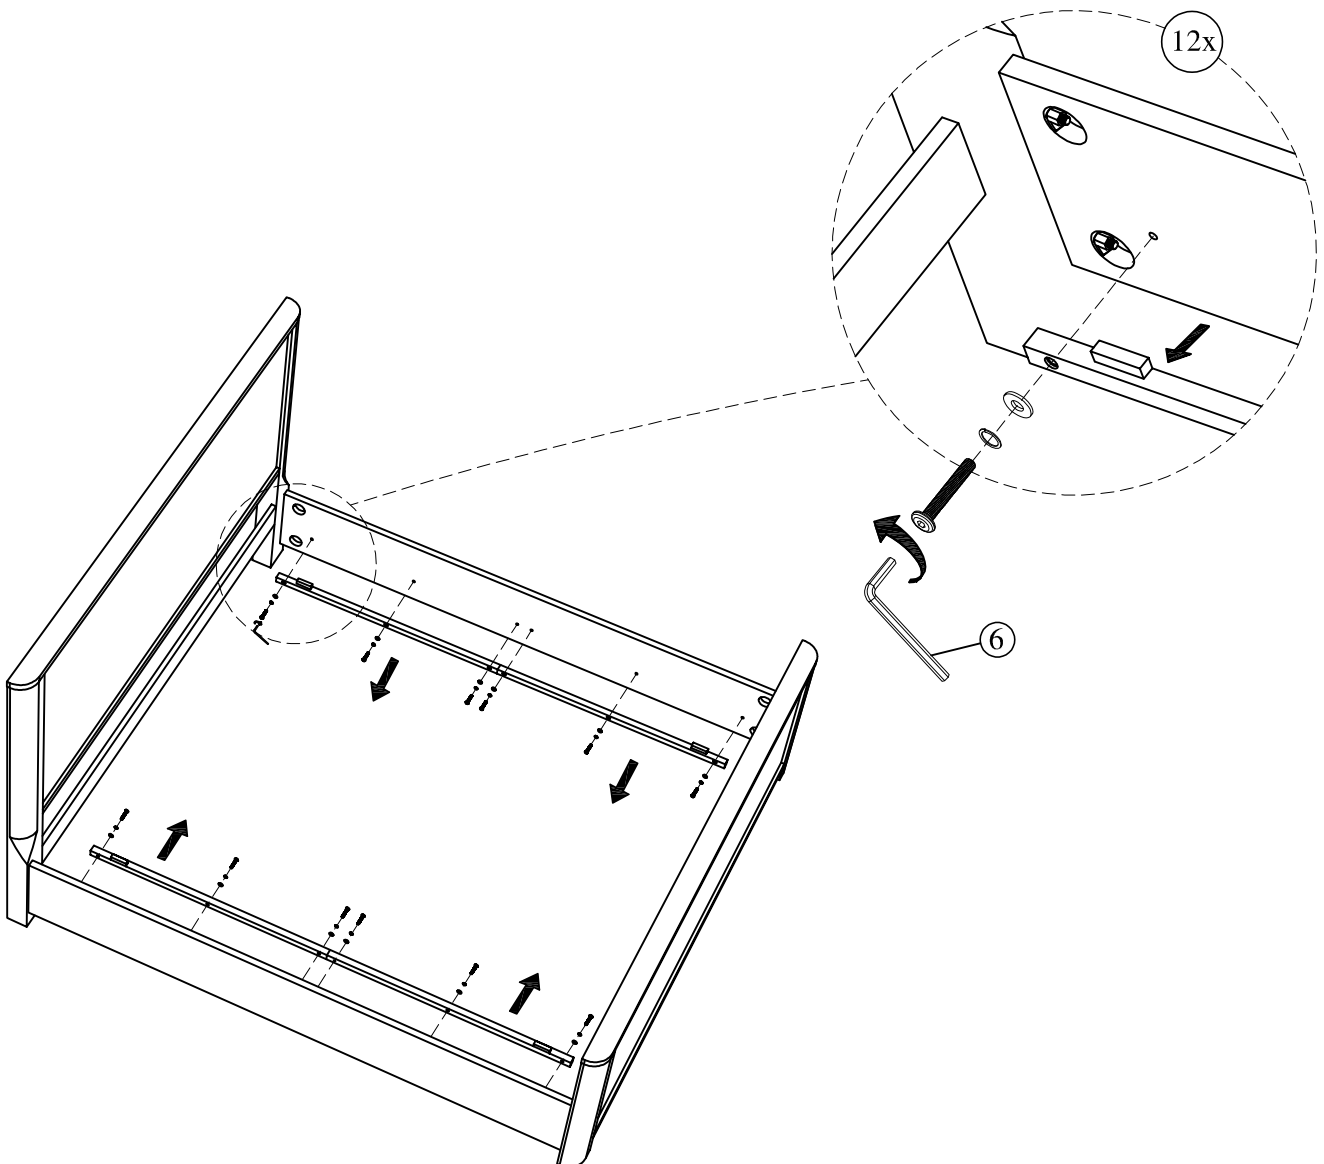

NOTE: YOU MAY WISH TO RETAIN UNUSED PARTS IF IN THE FUTURE YOU INTEND TO USE THE BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION

EVELYN WOOD KING BED


ASSEMBLY INSTRUCTIONS



PARTS PACKING CONFIGURATIONS


BOX #1

A. HEADBOARD 1PC




BOX #2

B. FOOTBOARD 1 PC
C. SLAT ROLL 1 SET
D. SUPPORT LEG 10 PCS

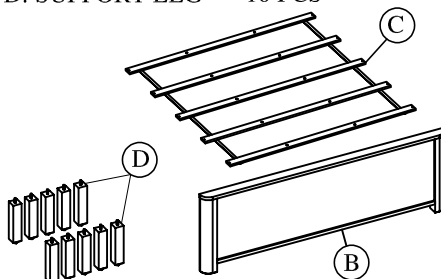


BOX #3

E. SIDE RAIL 2 PCS





FULLY ASSEMBLED

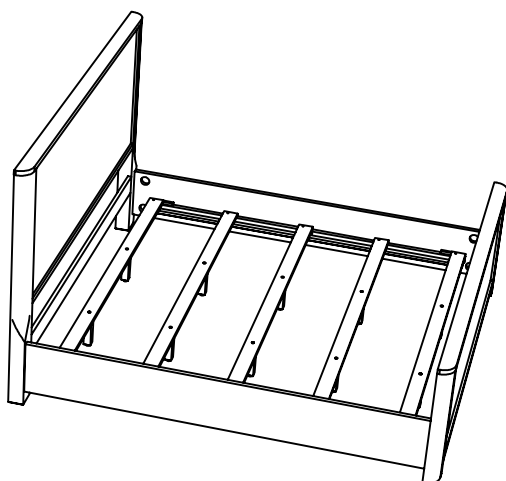


HARDWARE KIT PACKED IN BOX #2

NO.	DESCRIPTION	IMAGE	QTY
1	THREADED BOLT (5/16"x80mm)		8 PCS
2	HEX NUT (5/16")		8 PCS
3	HALF MOON WASHER		8 PCS
4	WRENCH		1 PC
5	WOOD SCREW (4x30mm)		10 PCS
6	ALLEN KEY		1 PC




STEP 1

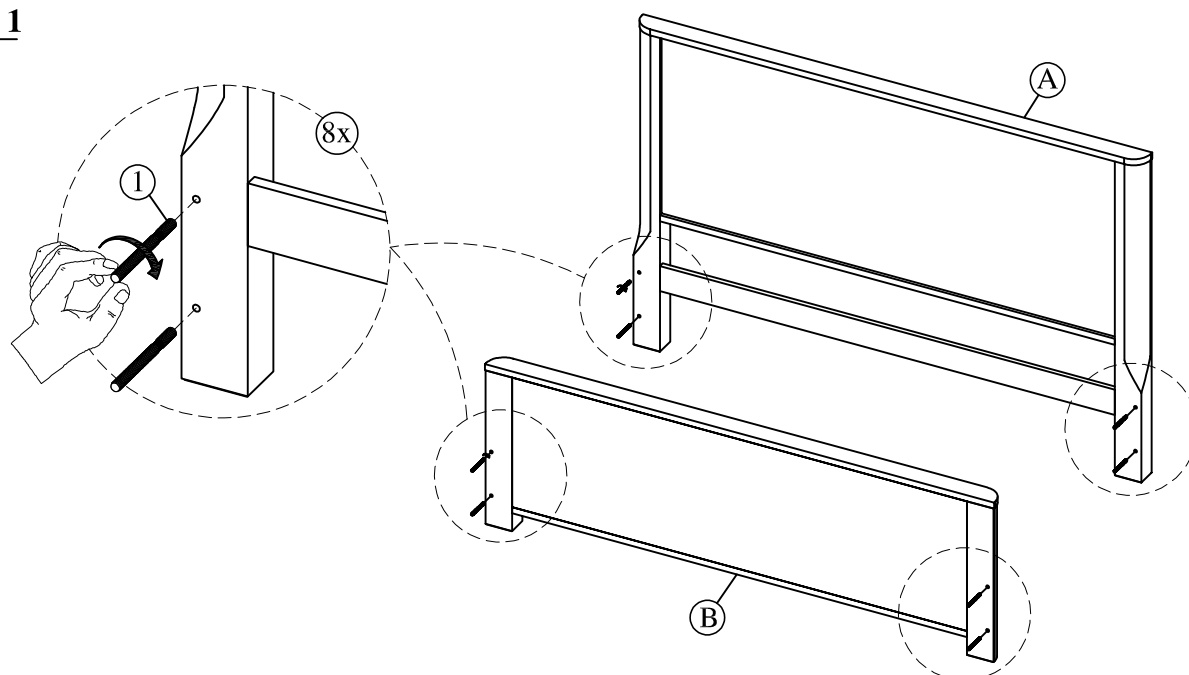


EVELYN WOOD KING BED ASSEMBLY INSTRUCTIONS

MODUS
FURNITURE

STEP 2

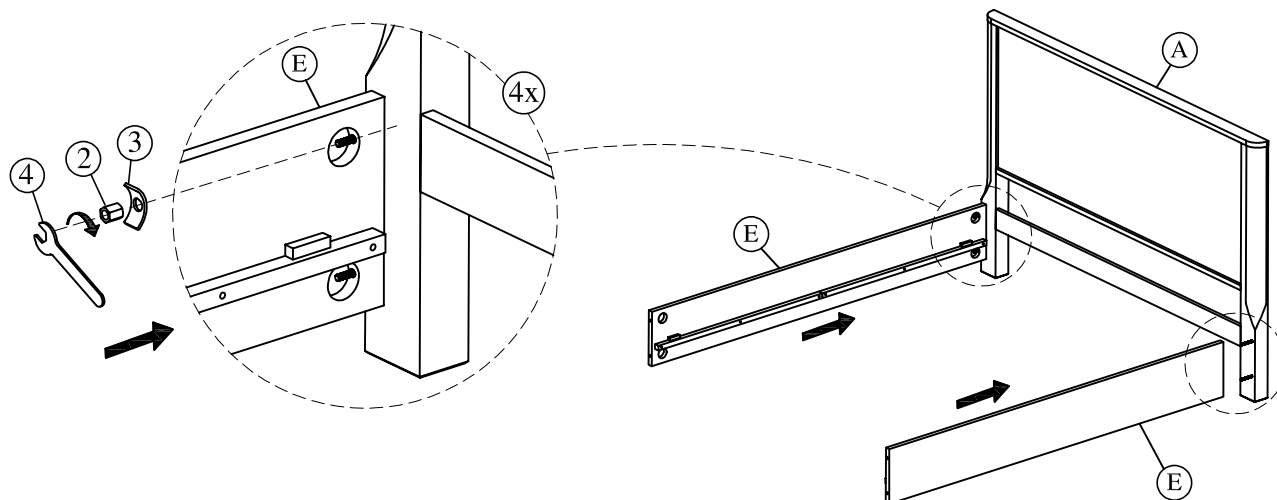


STEP 3

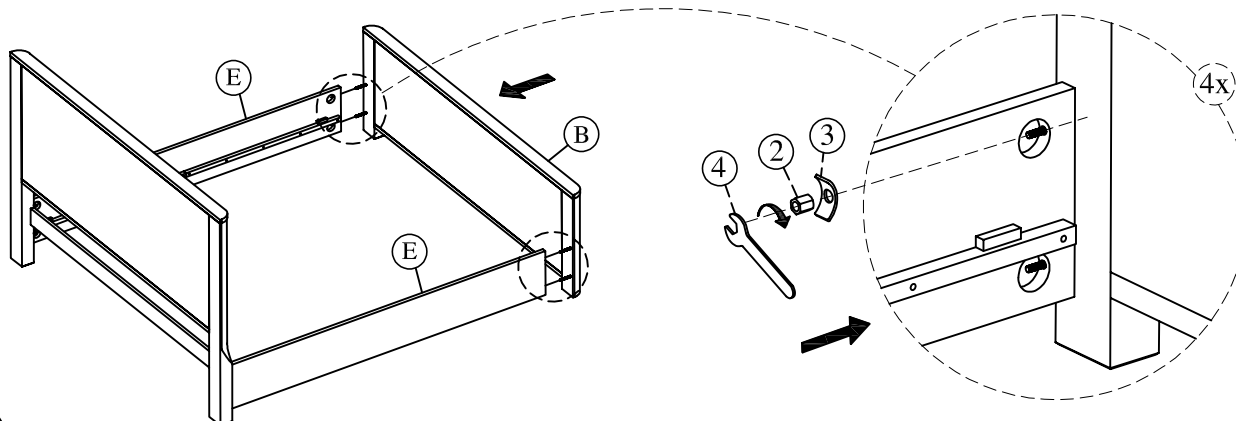

STOP

IF USING BED WITH AN ADJUSTABLE MATTRESS BASE, SKIP STEPS 4, 5, 6 & 7
AND REFERENCE APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT.
IF USING BED FRAME WITH STANDARD BOX SPRING OR FOUNDATION, CONTINUE TO STEP 4


STEP 4

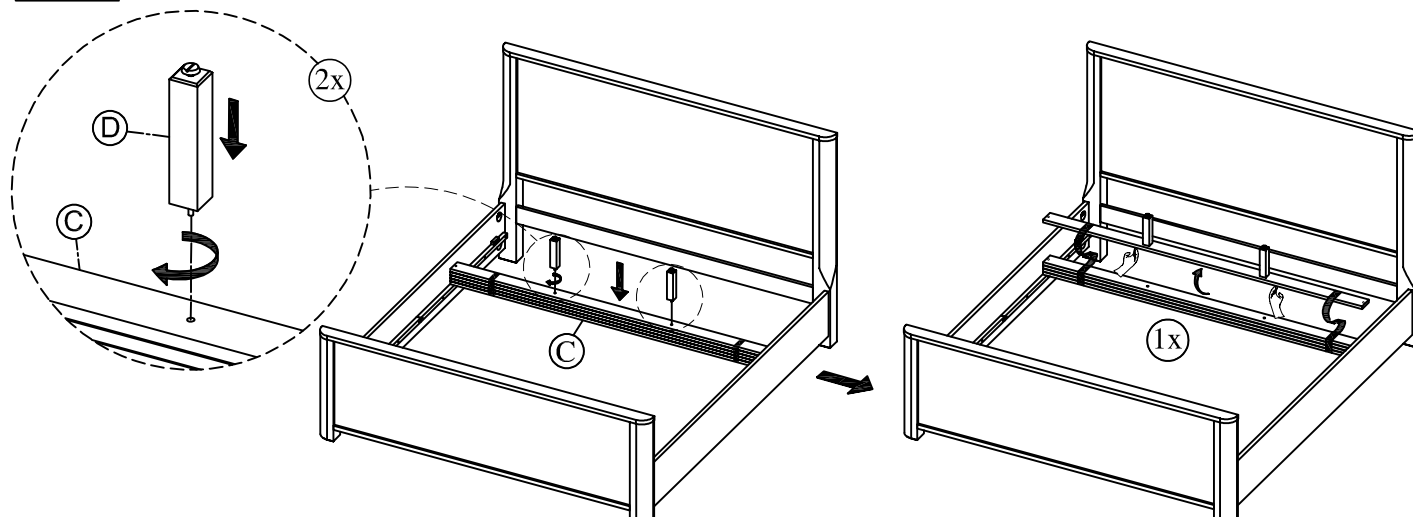


EVELYN WOOD KING BED ASSEMBLY INSTRUCTIONS

MODUS
FURNITURE

STEP 5

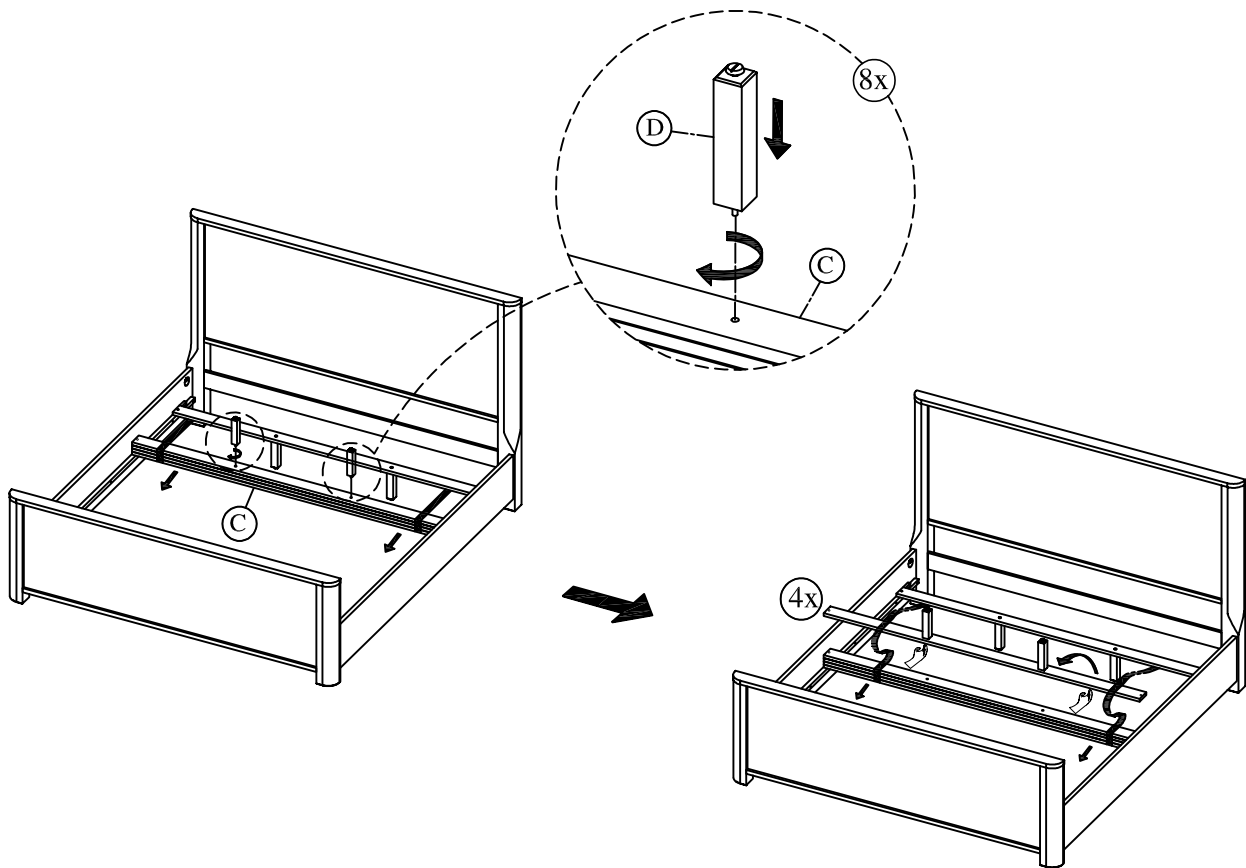


STEP 6

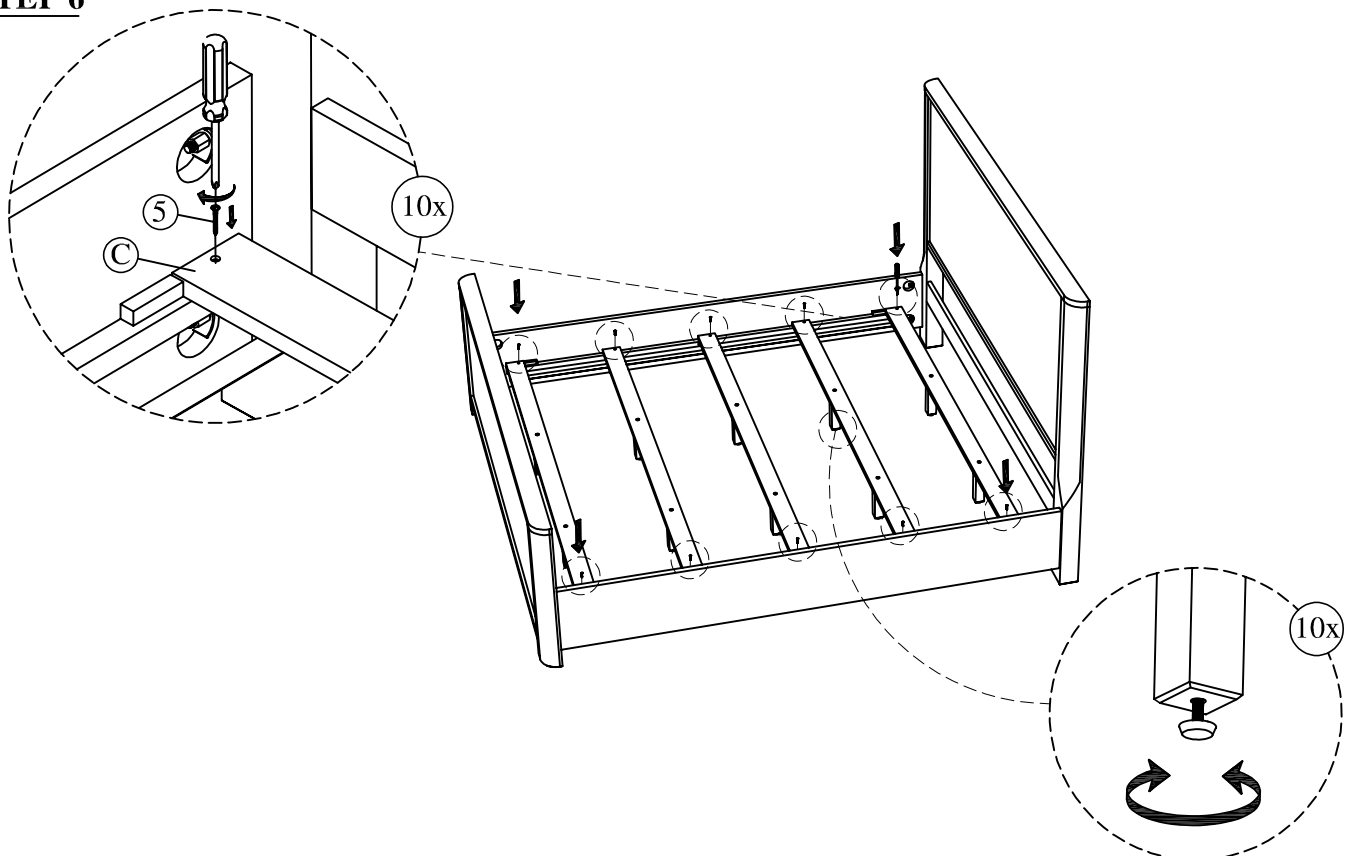

EVELYN WOOD KING BED ASSEMBLY INSTRUCTIONS



STEP 7

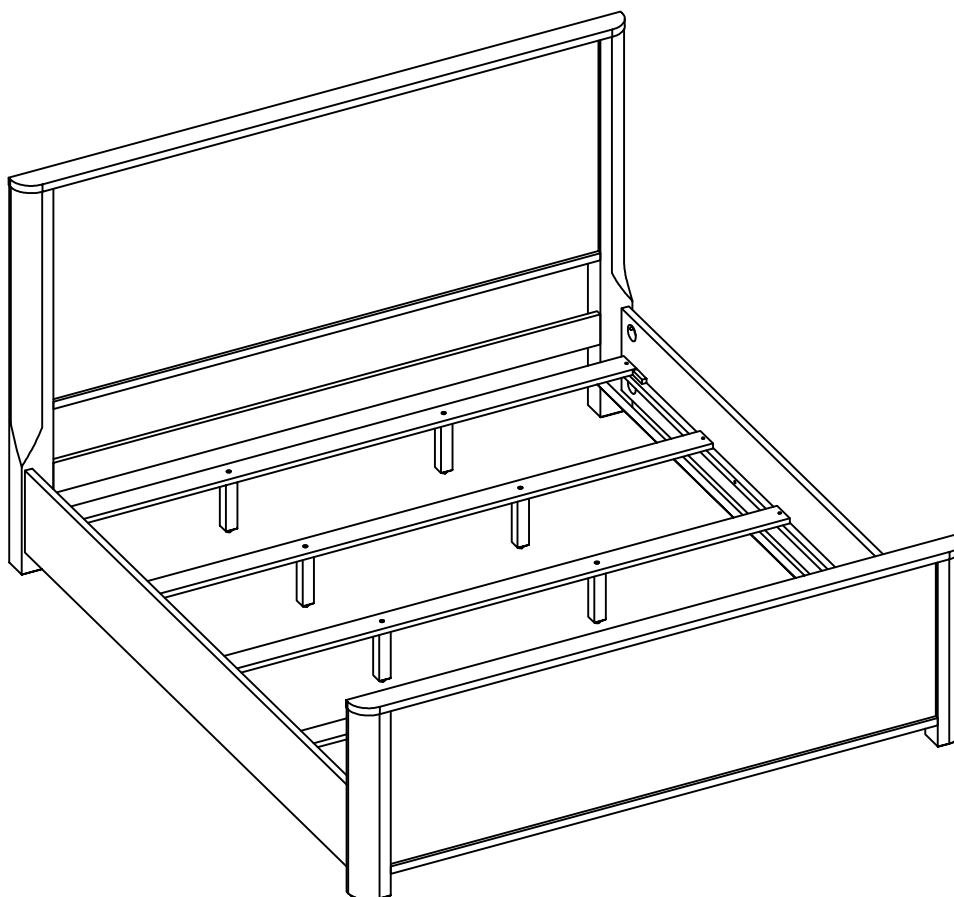


ASSEMBLY COMPLETE

INSTRUCTIONS FOR ADJUSTING LEVELERS:

Position the bed in your space and locate the leveler under each leg support.

Turn the leveler counter-clockwise to extend and clockwise to retract it.

Adjust each leveler until each leg support is applying equal, upward pressure on the slat.



MAINTENANCE INSTRUCTIONS:

- Periodically check all fittings and tighten if necessary, as they can loosen over time.
- Always remove box spring and mattress before moving the bed.
- Lift the bed when moving it. Dragging the bed can damage the center support.
- Readjust levelers after moving the bed.

EVELYN WOOD KING BED ASSEMBLY INSTRUCTIONS



APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT

AN ADJUSTABLE MATTRESS BASE IS A FREESTANDING MATTRESS SUPPORT THAT SITS WITHIN THE PERIMETER OF THE BED FRAME.

IF USING THIS BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION THESE INSTRUCTIONS DO NOT APPLY.

PRE-ASSEMBLED SIDE RAIL CLEATS OBSTRUCT ADJUSTABLE BASE INSTALLATION AND OPERATION. FOLLOW THESE INSTRUCTIONS TO REMOVE THEM.


THE FOLLOWING PARTS ARE NOT REQUIRED FOR ADJUSTABLE MATTRESS BASE INSTALLATION:

C. SLAT ROLL : 1 SET
D. SUPPORT LEG : 10 PCS

5. WOOD SCREW (4x30mm): 10 PCS

STEP #1:

USE ALLEN KEY (6) TO UNSCREW ALLEN BOLTS AND REMOVE PRE-ASSEMBLED SIDE RAIL CLEATS.

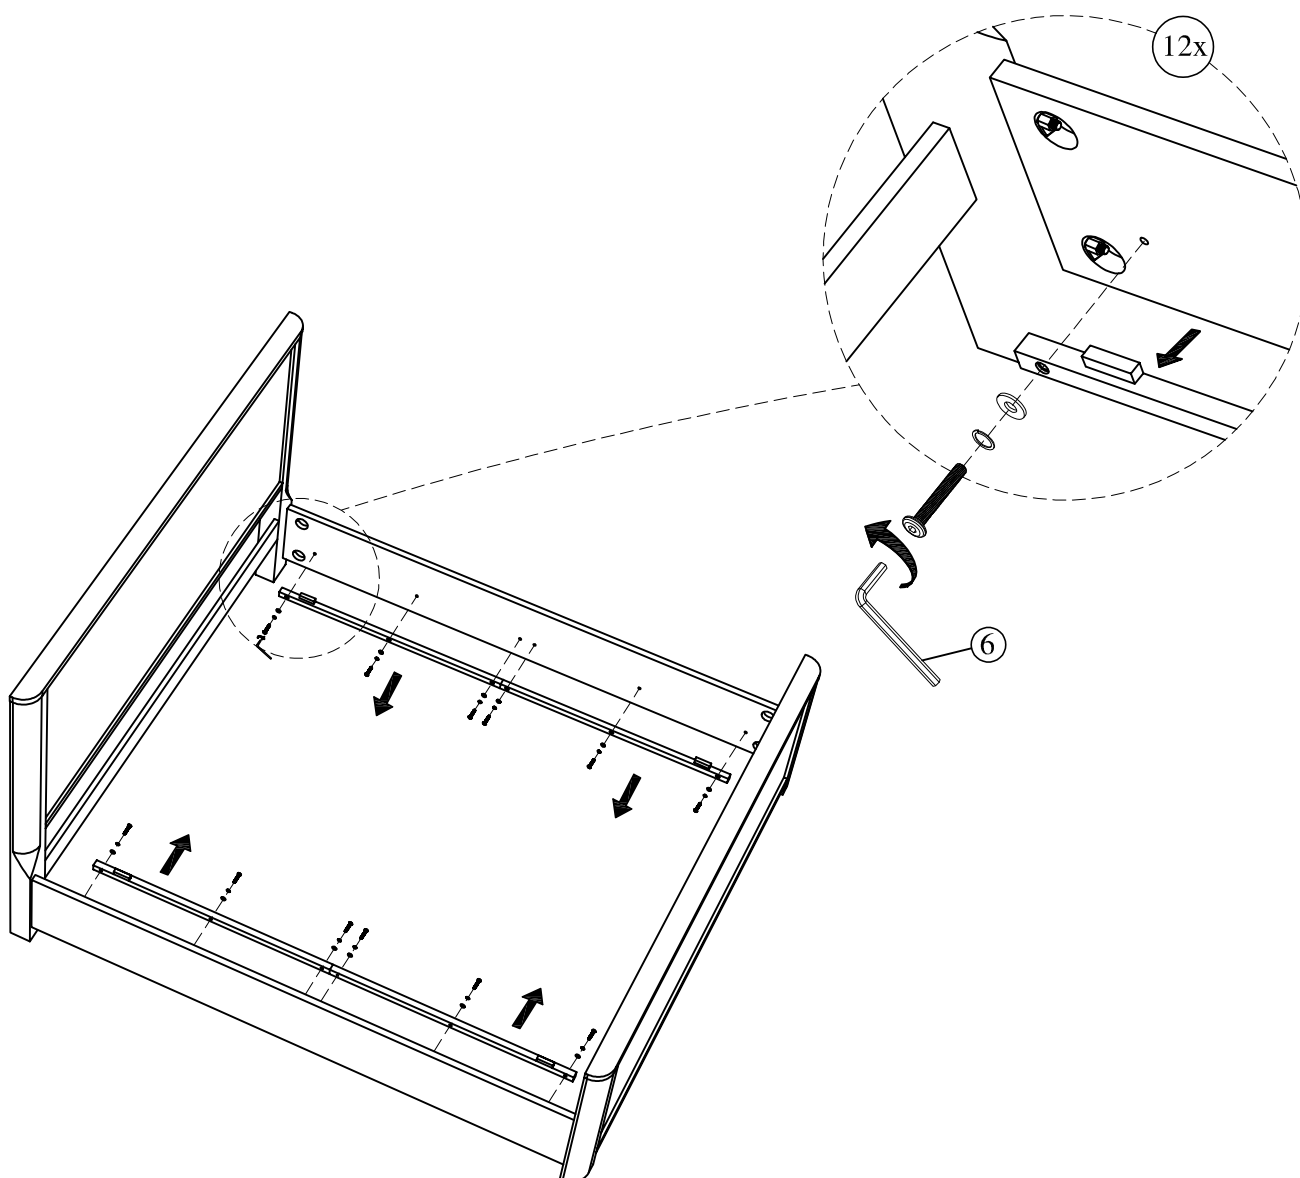

NOTE: YOU MAY WISH TO RETAIN UNUSED PARTS IF IN THE FUTURE YOU INTEND TO USE THE BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION

EVELYN WOOD CAL KING BED


ASSEMBLY INSTRUCTIONS



PARTS PACKING CONFIGURATIONS


BOX #1

A. HEADBOARD 1PC




BOX #2

B. FOOTBOARD 1 PC
C. SLAT ROLL 1 SET
D. SUPPORT LEG 10 PCS

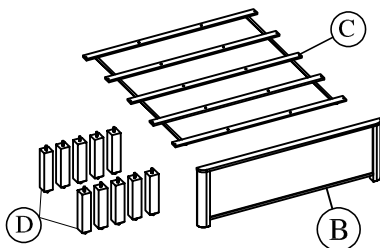


BOX #3

E. SIDE RAIL 2 PCS
F. MATTRESS SPACER 2 PCS

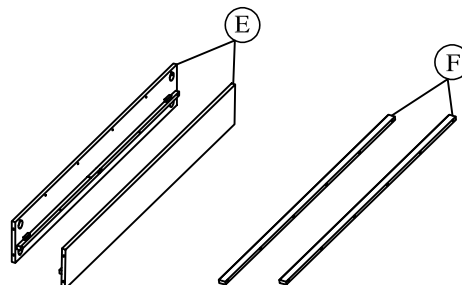

FULLY ASSEMBLED

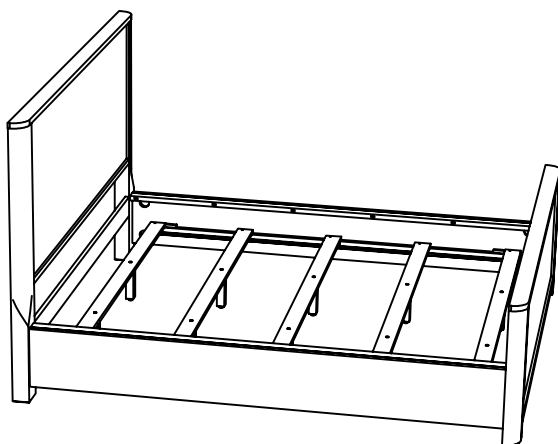


HARDWARE KIT PACKED IN BOX #2


NO.	DESCRIPTION	IMAGE	QTY
1	THREADED BOLT (5/16"x80mm)		8 PCS
2	HEX NUT (5/16")		8 PCS
3	HALF MOON WASHER		8 PCS
4	WRENCH		1 PC
5	WOOD SCREW (4x30mm)		10 PCS
6	ALLEN KEY		1 PC

HARDWARE KIT PACKED IN BOX #3

7	ALLEN BOLT (1/4"x60mm)		12 PCS
8	SPRING WASHER (1/4")		12 PCS
9	FLAT WASHER (1/4")		12 PCS
10	ALLEN KEY		1 PC




STEP 1

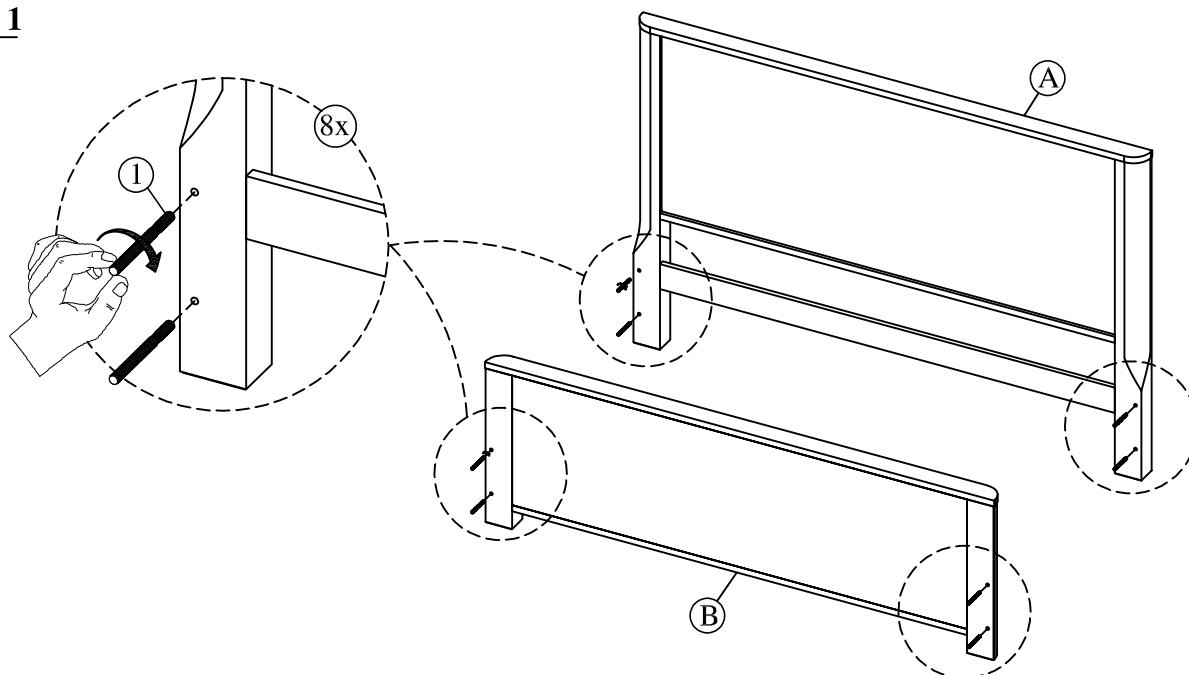


EVELYN WOOD CAL KING BED ASSEMBLY INSTRUCTIONS

STEP 2

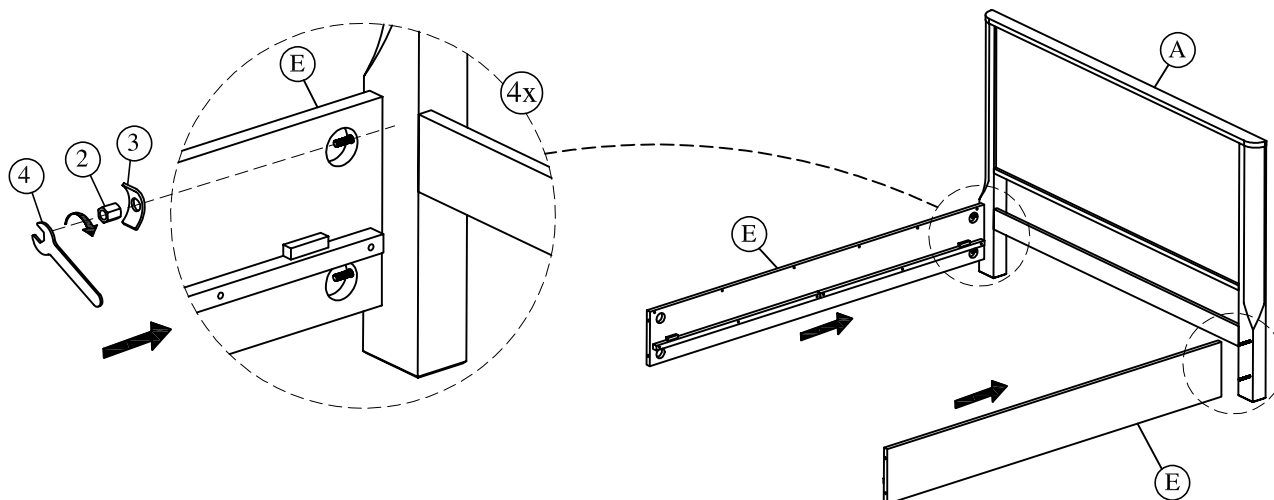


STEP 3

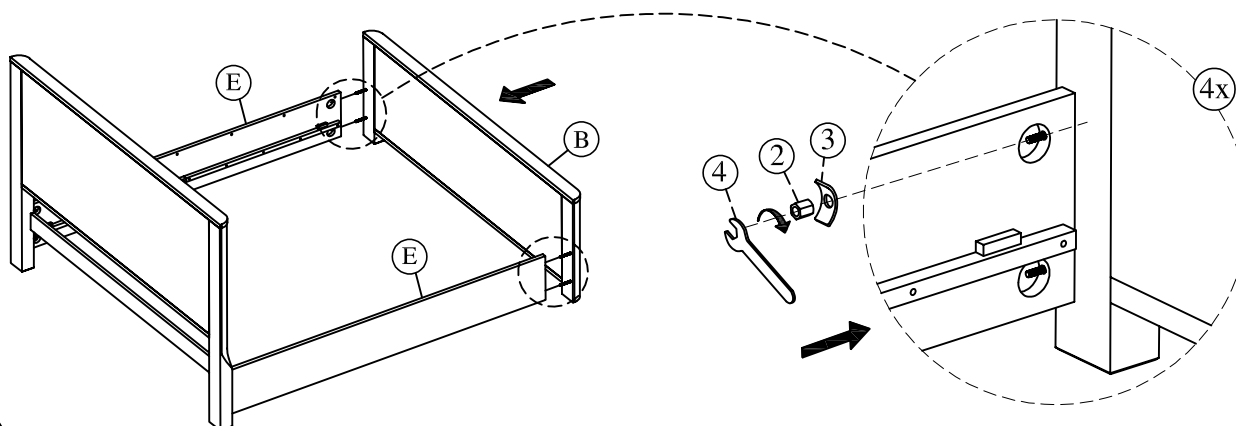

STOP

IF USING BED WITH AN ADJUSTABLE MATTRESS BASE, SKIP STEPS 4, 5, 6, 7 & 8
AND REFERENCE APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT.
IF USING BED FRAME WITH STANDARD BOX SPRING OR FOUNDATION, CONTINUE TO STEP 4


STEP 4

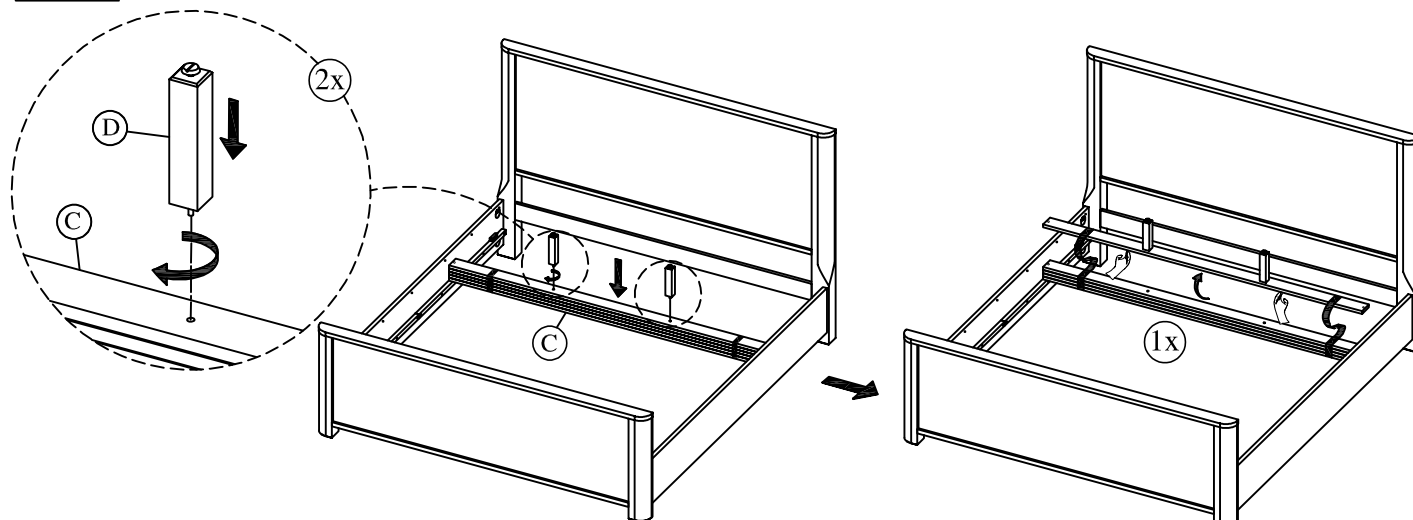


EVELYN WOOD CAL KING BED ASSEMBLY INSTRUCTIONS

MODUS
FURNITURE

STEP 5

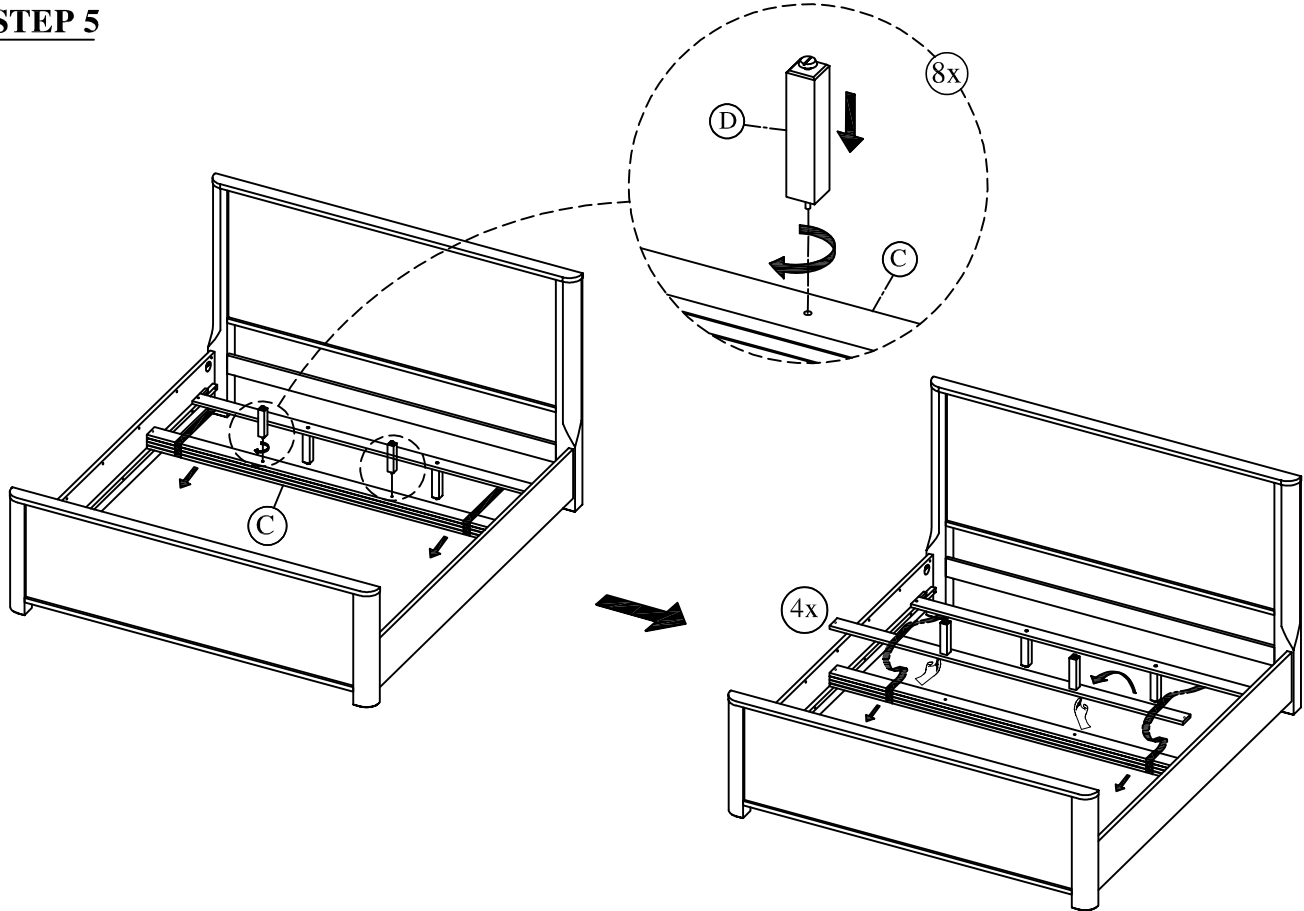


STEP 6

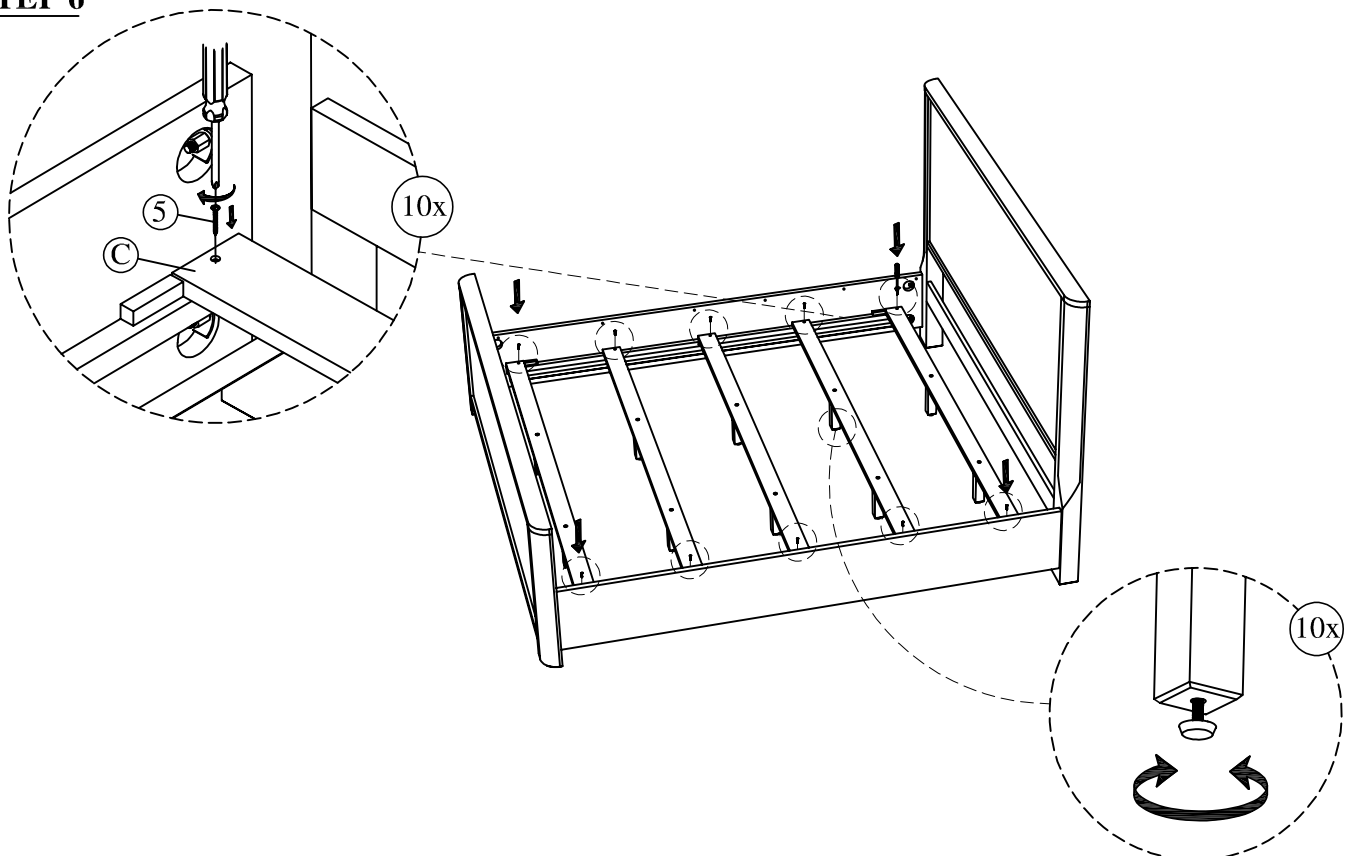


EVELYN WOOD CAL KING BED ASSEMBLY INSTRUCTIONS



STEP 7

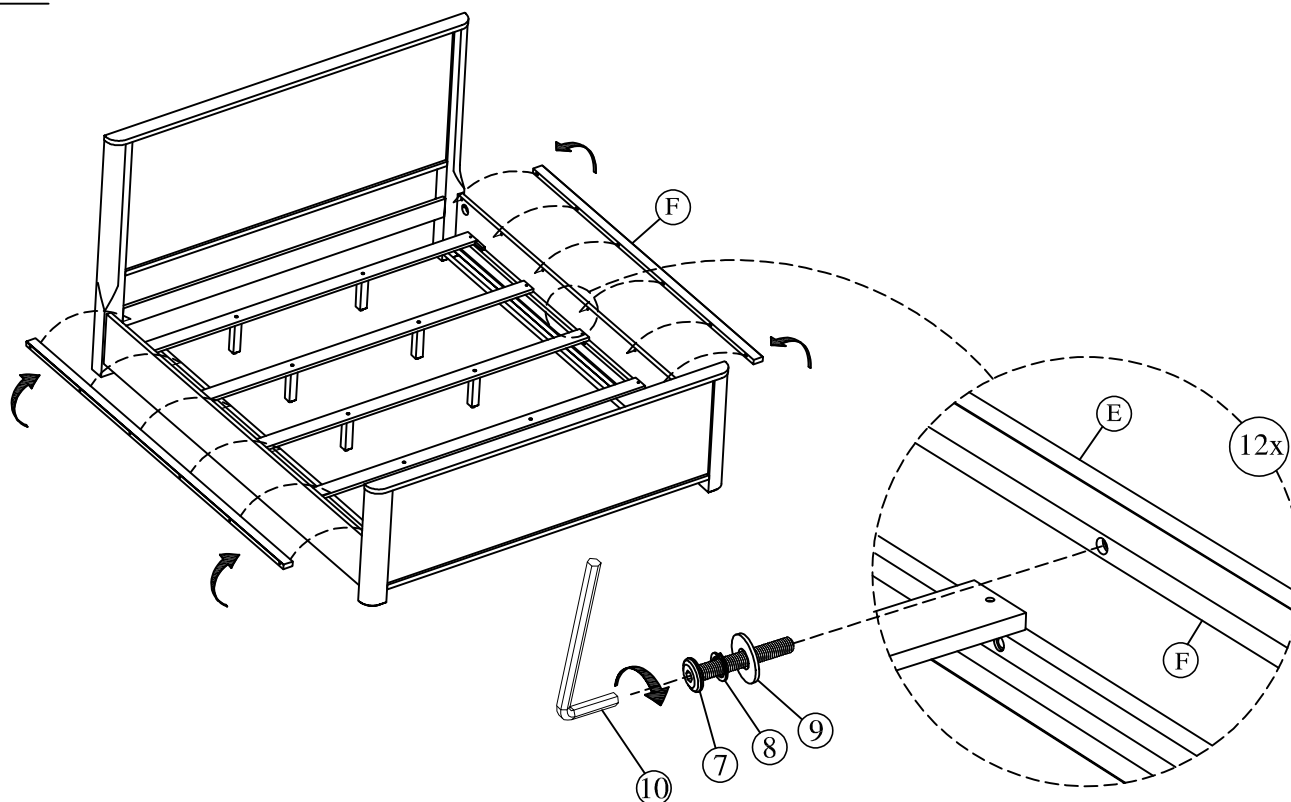

STEP 8

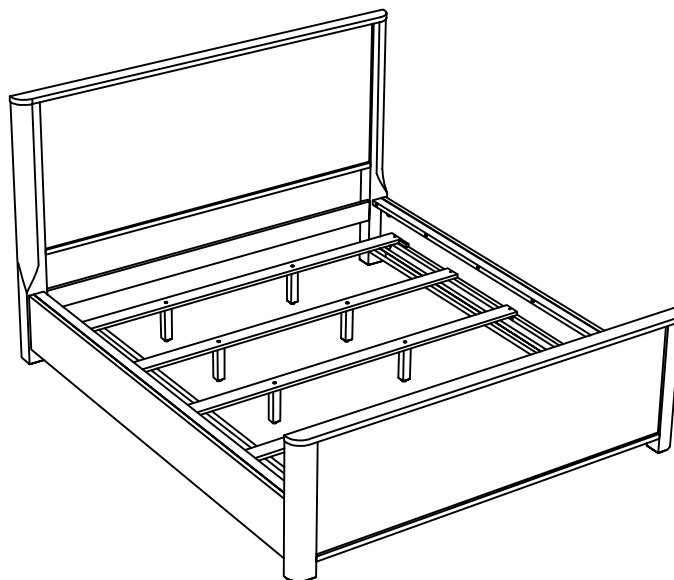


ASSEMBLY COMPLETE

INSTRUCTIONS FOR ADJUSTING LEVELERS:

Position the bed in your space and locate the leveler under each leg support.

Turn the leveler counter-clockwise to extend and clockwise to retract it.

Adjust each leveler until each leg support is applying equal, upward pressure on the slat.



MAINTENANCE INSTRUCTIONS:

- Periodically check all fittings and tighten if necessary, as they can loosen over time.
- Always remove box spring and mattress before moving the bed.
- Lift the bed when moving it. Dragging the bed can damage the center support.
- Readjust levelers after moving the bed.

EVELYN WOOD CAL KING BED ASSEMBLY INSTRUCTIONS



APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT

AN ADJUSTABLE MATTRESS BASE IS A FREESTANDING MATTRESS SUPPORT THAT SITS WITHIN THE PERIMETER OF THE BED FRAME.

IF USING THIS BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION THESE INSTRUCTIONS DO NOT APPLY.


PRE-ASSEMBLED SIDE RAIL CLEATS OBSTRUCT ADJUSTABLE BASE INSTALLATION AND OPERATION. FOLLOW THESE INSTRUCTIONS TO REMOVE THEM.

THE FOLLOWING PARTS ARE NOT REQUIRED FOR ADJUSTABLE MATTRESS BASE INSTALLATION:

C. SLAT ROLL	: 1 SET	5. WOOD SCREW (4x30mm):	10 PCS
D. SUPPORT LEG	: 10 PCS	7. ALLEN BOLT (1/4"x60mm):	12 PCS
F. MATTRESS SPACER	: 2 PCS	8. SPRING WASHER (1/4"):	12 PCS
		9. FLAT WASHER (1/4"):	12 PCS

STEP #1:

USE ALLEN KEY (6) TO UNSCREW ALLEN BOLTS AND REMOVE PRE-ASSEMBLED SIDE RAIL CLEATS.

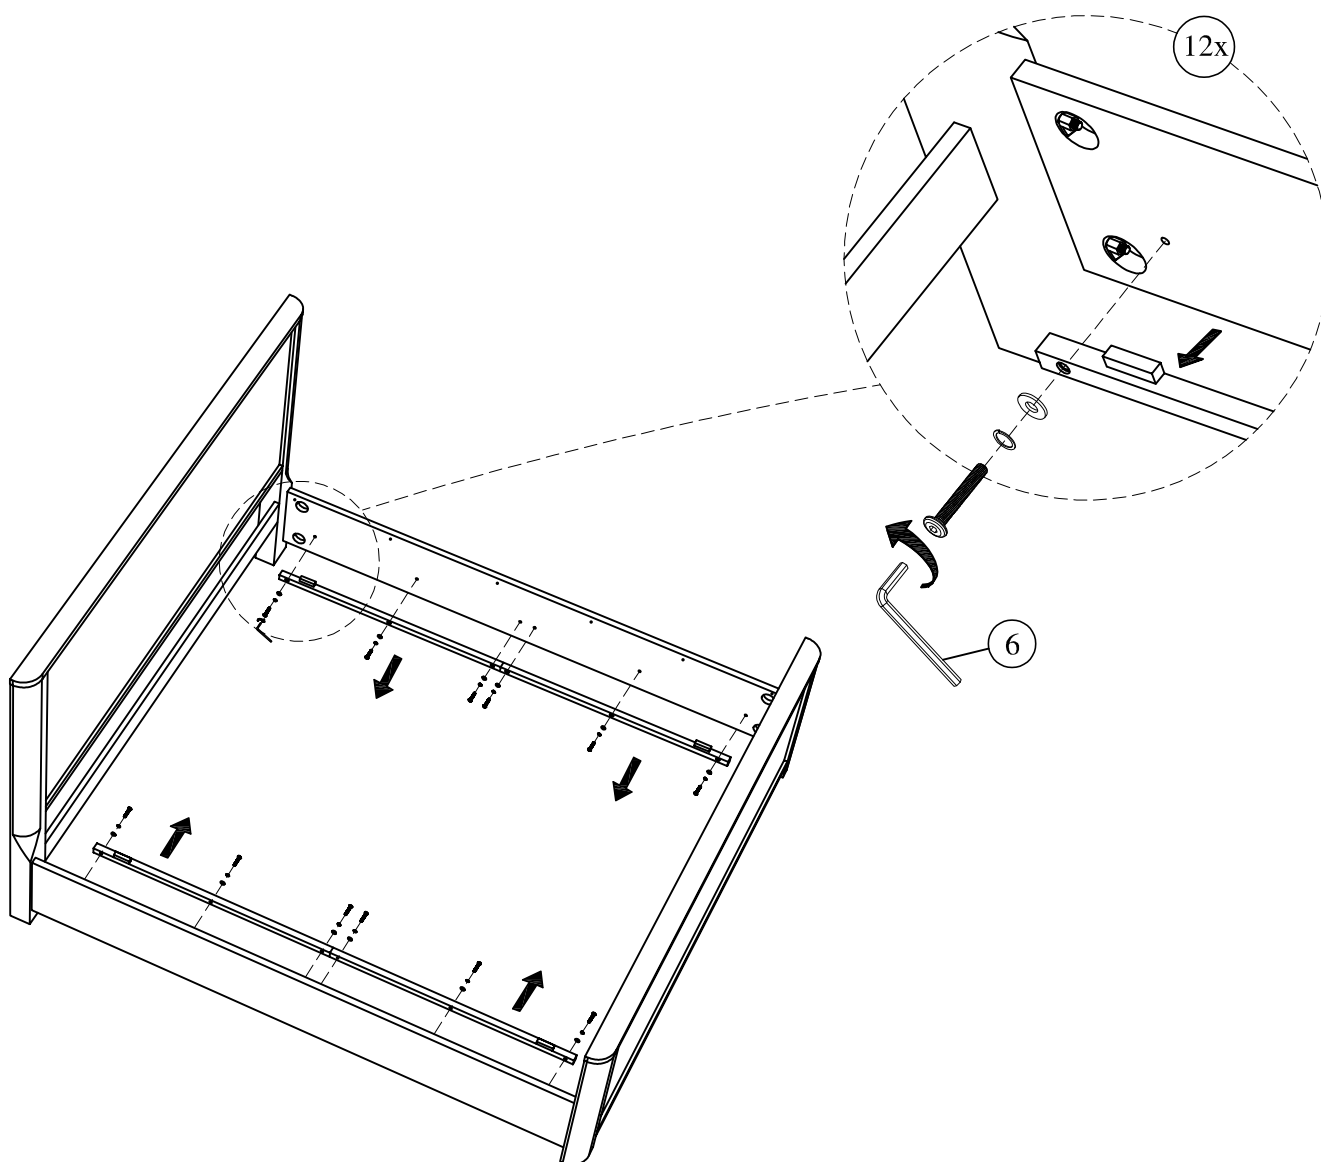

NOTE: YOU MAY WISH TO RETAIN UNUSED PARTS IF IN THE FUTURE YOU INTEND TO USE THE BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION