
DIRECTIONS

To start movement install (1) alkaline battery (A) (not included). The battery must be installed with the positive (+) located as indicated on the battery compartment. The hands should be set by turning the knob (B) on the movement in the direction of the arrow until the hands indicate actual time. Your movement has an ON/OFF (C) switch which is used to start the movement at the set time.

CAUTION: When clock stops, remove battery immediately and replace with new LEAK-PROOF battery of the appropriate size.



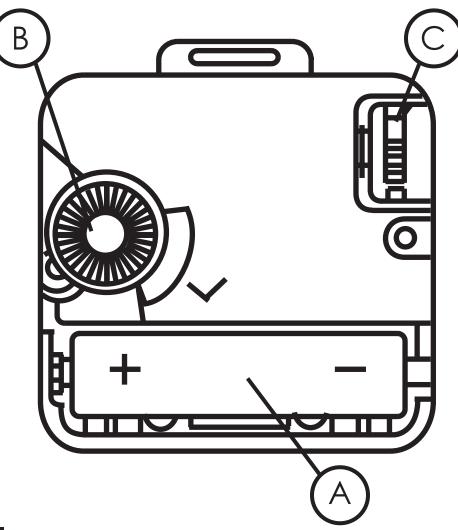

860 East Main Avenue Zeeland, Michigan 49464 Corporate Office: (616) 772-7277 www.howardmiller.com