

KINGSTON


# Utility Sink Drain


## Installation Instructions


## Tools Required



Drain Wrench


Dumbbell Drain Wrench


Basin Wrench

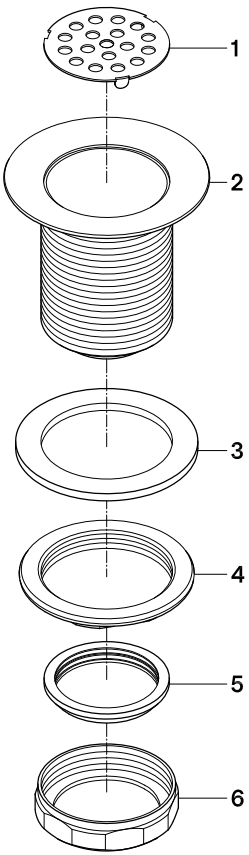

Adjustable Wrench


Silicone Sealant


Screwdriver

## Installation Step:

1. Clean area around the sink drain hole and apply a bead of silicone based caulking to the underside of the drain flange and insert into drain hole from the top.
2. From below the sink slide rubber washer up onto the drain threads until it comes in contact with the sink.
3. Thread locknut by hand, make sure the drain is centered on the sink drain hole and tighten lock nut using a basin wrench, be careful not to overtighten especially if it is being installed on a porcelain or fireclay sink.
4. Secure 1-1/2" Tailpiece & P-trap to the drain using the provided compression nut and rubber gasket.




**NOTICE**

Failure to follow all directions may cause leaks which may result in water damage

www.kingstonbrass.com

TOLL-FREE CUSTOMER SERVICE: 1-877-2-KBRASS
TECHNICAL SUPPORT E-mail: service@kingstonbrass.com
12775 Reservoir Street, Chino, CA 91710

©2025 LVC Kingston LLC. All Rights Reserved.
2026-01-D