



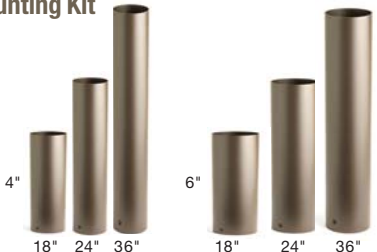




MOUNTING ACCESSORIES	ITEM NUMBER	NOTES						
<p>Fixture Mounting Stems</p>  <p>1/2-14 NPSM thd. stems .75 dia. overall</p>	<table border="0"> <tr> <td>6" 15645 AZT 15645 BBR 15645 BKT</td> <td>18" 15657 AZT 15657 BBR 15657 BKT</td> </tr> <tr> <td>12" 15656 AZT 15656 BBR 15656 BKT</td> <td>24" 15658 AZT 15658 BBR 15658 BKT</td> </tr> </table>	6" 15645 AZT 15645 BBR 15645 BKT	18" 15657 AZT 15657 BBR 15657 BKT	12" 15656 AZT 15656 BBR 15656 BKT	24" 15658 AZT 15658 BBR 15658 BKT	<p>All stems made of corrosion resistant aluminum alloy (except BBR, which is Bronzed Brass) with baked thermoset powder coating to match fixtures. Used with:</p> <ul style="list-style-type: none"> • In-ground support stakes (low voltage only) • Surface mounting flange (low or line voltage) <p>1/2-14 NPSM stems will require additional Coupler (15649) or Elbow (15647) for accent light use</p>		
6" 15645 AZT 15645 BBR 15645 BKT	18" 15657 AZT 15657 BBR 15657 BKT							
12" 15656 AZT 15656 BBR 15656 BKT	24" 15658 AZT 15658 BBR 15658 BKT							
<p>Power Post®</p>  <p>4.375" 19" 2.25"</p>	<p>15276 BKT For use with fixtures 15205 AZT, 15205 BKT, 15211 AZT, 15211 BKT, 15232 AGZ, 15236 BKT, 15236 TZ, 15239 OB & 15239 OZ</p>	<p>Fast, one-step connection. 2¼" inside diameter accepts conduit of different sizes. Made of impact and corrosion resistant PVC, suitable for wet locations. No unsightly junction boxes or time-taking assembly. Just a trouble-free installation. Designed for line voltage (120V) landscape lighting. Eliminates need for above or below ground boxes. Built-in stabilizer removes need for concrete. Accepts 1/2 NPSM thread. UL and cUL listed</p>						
<p>Bollard Mounting Stake</p>  <p>23" H</p>	<p>15578 BK For use with all bollard mounting kits on 12V and 120V fixtures 15005, 15011, 15205, 15211</p>	<p>Improved extruded PVC stake is corrosion resistant and 23" length has increased support and stability. Fitting provided to mount bollard in soil. *As allowed by local electrical codes</p>						
<p>Bollard Mounting Kit</p>  <p>4.0625" ID 4.25" OD</p>	<table border="0"> <tr> <td>18" 15665 AZT 15665 BKT</td> <td>For use with fixtures 15005, 15011, 15205, 15211</td> </tr> <tr> <td>24" 15666 AZT 15666 BKT</td> <td>For use with fixtures 15005, 15011, 15205, 15211</td> </tr> <tr> <td>36" 15667 AZT 15667 BKT</td> <td>For use with fixtures 15005, 15011, 15205, 15211</td> </tr> </table>	18" 15665 AZT 15665 BKT	For use with fixtures 15005, 15011, 15205, 15211	24" 15666 AZT 15666 BKT	For use with fixtures 15005, 15011, 15205, 15211	36" 15667 AZT 15667 BKT	For use with fixtures 15005, 15011, 15205, 15211	<p>Bollard kit is supplied with Cast Aluminum internal mounting plate including lag bolts for deck or surface mounting. Extruded aluminum bollard finished with baked thermoset powder coat. Order separate bollard template kit for installation into concrete or bollard mounting stake for installation in soil. UL listed.</p>
18" 15665 AZT 15665 BKT	For use with fixtures 15005, 15011, 15205, 15211							
24" 15666 AZT 15666 BKT	For use with fixtures 15005, 15011, 15205, 15211							
36" 15667 AZT 15667 BKT	For use with fixtures 15005, 15011, 15205, 15211							
<p>HID Bollard Mounting Kit</p>  <p>4" 18" 24" 36" 6" 18" 24" 36"</p>	<table border="0"> <tr> <td>4" x 18" 15603 AZT 15603 BKT</td> <td>6" x 18" 15613 AZT 15613 BKT</td> </tr> <tr> <td>4" x 24" 15604 AZT 15604 BKT</td> <td>6" x 24" 15614 AZT 15614 BKT</td> </tr> <tr> <td>4" x 36" 15605 AZT 15605 BKT</td> <td>6" x 36" 15615 AZT 15615 BKT</td> </tr> </table> <p>For use with fixtures 15215, 15221, 15226</p>	4" x 18" 15603 AZT 15603 BKT	6" x 18" 15613 AZT 15613 BKT	4" x 24" 15604 AZT 15604 BKT	6" x 24" 15614 AZT 15614 BKT	4" x 36" 15605 AZT 15605 BKT	6" x 36" 15615 AZT 15615 BKT	
4" x 18" 15603 AZT 15603 BKT	6" x 18" 15613 AZT 15613 BKT							
4" x 24" 15604 AZT 15604 BKT	6" x 24" 15614 AZT 15614 BKT							
4" x 36" 15605 AZT 15605 BKT	6" x 36" 15615 AZT 15615 BKT							
<p>Surface Mounting Flange</p>  <p>4" D 1/2-14 NPSM thd</p>	<p>15601 AZT 15601 BBR 15601 BKT 15601 WHT</p>	<p>On 120V installations, Cast Aluminum surface flange must be used with junction box (not included). Neoprene gasket supplied to ensure water tight seal. BBR is Bronzed Cast Brass.</p>						
<p>Flange Mounting Nipple</p>  <p>1/2-14 NPSM thd.</p>	<p>15602 AL</p>	<p>Anodized aluminum nipple. Used when attaching fixture directly to 15601 flange and 15607 bracket.</p>						