


# Plastic Drum

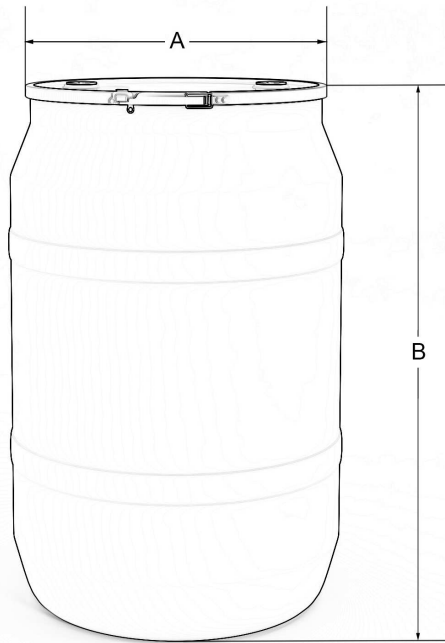

## Specifications

UN Mark(s)	1H2/X150/S & 1H2/Y250/S
Nominal Capacity	55 gal
Nominal O.D. (A)	23.0 inches
Opening I.D.	19.3 inches
Overall Height (B)	36.8 inches
Body Height	36.5 inches
Mid Panel Height	10.3 inches
Chime Height	0.480 inches
Total Weight	20.6 lbs
Body Weight	16.4 lbs
Min. Wall Thickness	0.090 inches

Opening 1	2" NPS
Closure 1	G2X11.5 NPS PLASTIPLUG™ EPDM
Tabseal 1	None
Opening 2	2" NPS
Closure 2	G2X11.5 NPS PLASTIPLUG™ EPDM
Tabseal 2	None

Body Construction	Extrusion blow molded
Resin Type	HDPE / GB1 Resin
Body Color	Blue
Cover Type	Plastic, FIG w/2" & 2"
Cover Color	Blue
Closing Ring	Steel Exterior Lever-Lok 16ga
Special Instructions	Change plugs in cover to two CLPL80
Design Notes	Recycle symbol embossed on bottom.
Filling Temperature	Maximum filling temperature 160°F. When filled at this maximum temperature, drums should be allowed to cool to ambient prior to stacking. Drums filled at elevated temperatures should be vented properly to prevent vacuum formation within the drum which can compromise stacking capability.

DISTRIBUTED BY:



REF NO.:

DWG31625

DESCRIPTION:

55 Gallon Blue HDPE OH SS Drum with Lever Lock Ring, UN Rated

### DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.