
HEKMAN



TO ASSEMBLE : (Two People Required)

- Step 1: Remove Drawers (B) and turn the table (A) upside down on a soft, clean surface
- Step 2: Remove Dustproof Panel (D) for allowing access and for installing the Leg Assemblies (C).
- Step 3: Attach Leg Assemblies (C) to each side table using the JCBC bolts(1) with lock washer(2) and a flat washer(3). Do not tighten until shelf (E) is attached.(Detail 1).
- Step 4: Line up the holes of metal tab in Legs Assemblies (C) with the bottom Shelf (E), then tighten with screw driver. (Detail 2).
- Step 5: Tighten JCBC bolts (1) in Leg Assemblies (C).
- Step 6: Reinstall the Dustproof panel (D).
- Step 7: Carefully turn the table upright and insert drawers (B) into position.

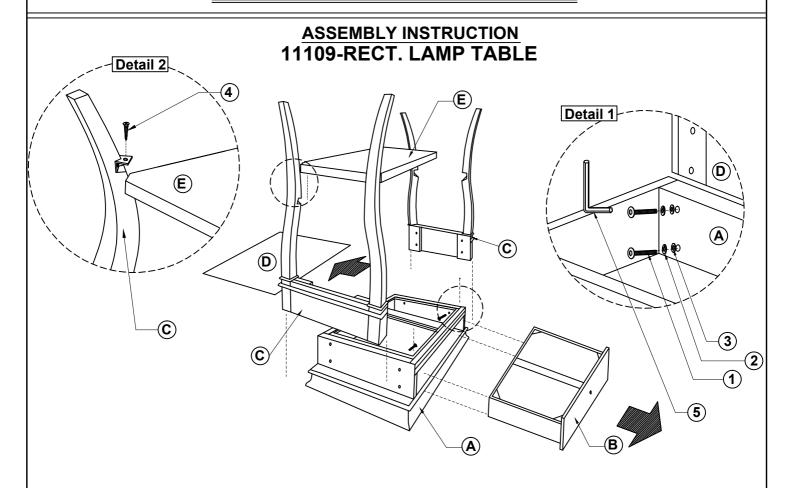

HARDWARE LIST			
Part	ltem	Description	Qty
1.		JCBC Bolt M6 x 45 mm	8 pcs
2.		Lock Washer M6	8 pcs
3.		Flat Washer M6	8 pcs
4.	(s))))))))))>>>	Screw 8 x ⁵ / ₈ "	4 pcs
5.		Allen Wrench	1 pc