


Hampton



Colors

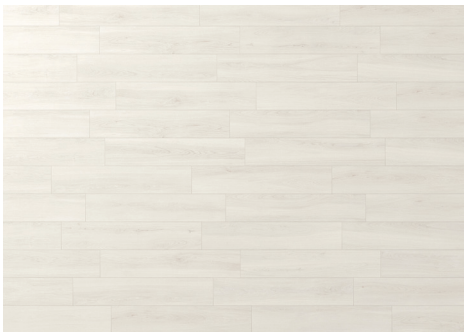

White Wash VTL HPWW



Weathered Grey VTL HPWG



Sun Bleached VTL HPSB




Jacobean VTL HPJA

Sizes



8" x 40" x 9mm Rectified



8" x 40" x 9mm Chevron Rectified

Field Tiles*

SIZE	ACTUAL	THICKNESS	FINISH
8" x 40" Chevron Rectified	8.00" x 40.00"	9.00mm	Matte/Natural
8" x 40" Rectified	8.00" x 40.00"	9.00mm	Matte/Natural
* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.			

Mosaics & Coordinating Trims*

SIZE	ACTUAL	FINISH
3" x 20" Bullnose Rectified	2.50" x 20.00"	Matte/Natural
Recommended Grout Joint: 1/8" - Rectified 3/16" - Non Rectified		

Product Characteristics

	MATTE/NATURAL
Breaking Strength (ASTM C648 or ISO 10545-4)	≥ 400 lbs
Chemical Resistance (ASTM C650 or ISO 10545-13)	Resistant
DCOF	> 0.42
Deep Scratch Resistance - Unglazed (ISO 10545-6)	N/A
Frost Resistance (ASTM C1026 or ISO 10545-12)	Resistant
Mohs Hardness - EN101	6
Water Absorption (ASTM C373 or ISO 10545-3)	≤ 0.5%
Certifications	HPD LEED Certified
Country of Origin	USA
Shade Variation Code	V2

Application**

		WALL	FLOOR
Interior	Residential	•	•
Interior	Commercial	•	•
Interior	Heavy Commercial	•	
Exterior	Residential/Commercial	•	

** These recommendations are not defined by ANSI Standards

Material

Glazed Color-Body Porcelain



V2 Slight Variation



DCOF: > 0.42



Made in USA



Water Absorption: ≤ 0.5%



Frost Resistant



HPD and LEED Certified



Recommend an offset pattern ≤33%



Scan QR Code for
Product Information and
Installation Images

Request samples.

www.vitlsurfaces.com
samples@vitlsurfaces.com

