




One Lithonia Way, Conyers, Georgia 30012 telephone 800 241-4750 www.relocwiring.com

SUPPLEMENTAL FIELD INSTALLATION INSTRUCTIONS

IMPORTANT SAFEGUARD: All unused connector openings must be capped.
Your RELOC cables are shipped with extra dust covers for this purpose.

SYSTEM 820, and ONEPASS use a metal end cover. These work with model numbers beginning with **CD, CE, CSU, DUP, MOA, OC, OCS, OSC2, OSS, PT, RRCA, SS, SSC, and ST.**

Additional covers may be ordered by requesting RDC3 METAL DUST COVER CSA/UL J50 through your RELOC Distributor.

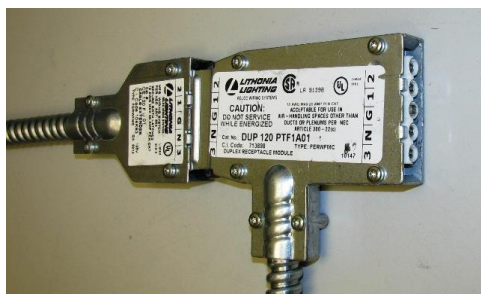

SYSTEM 820 without cap on unused opening.



Cap added.



ONEPASS without cap on unused opening.



Cap added.