Aimpoint

MILITARY & LAW ENFORCEMENT



Red Dot Sights

Content

Why Aimpoint?	5
Ready for any platform	6
System of Systems	8
Aimpoint® Acro P-2	12
Aimpoint® Duty RDS	18
Aimpoint® Micro	20
Aimpoint® Comp	22
Aimpoint® PRO	28
Aimpoint® MPS3	29
Aimpoint® Magnifiers	30
Aimpoint® CEU	34
Accessories	36
Mounting solutions	38
Technical specs	42



WHY AIMPOINT®?

With an Aimpoint® sight, you can hit moving targets faster and safer. That's a proven fact. Being able to shoot with both eyes open, fully aware of your surroundings, gives you the confidence you need in high-speed situations.

When your life depends on your equipment

When the time comes to take the shot, there should be no question that you can count on your sight to perform. So we design and test Aimpoint products to stand up to any condition you are likely to encounter. We also design our products to operate constantly for years on a single battery, so your sight will be ready when you are.

Aimpoint - the original

Aimpoint is the recognized worldwide leader and originator of red dot sighting technology. After almost 50 years of working closely with experienced marksmen and military weapons experts around the world, Aimpoint red dot sights remain the number one choice for combining ruggedness, speed and accuracy.

Aimpoint sights are in service with most NATO countries, the US Army, US Air Force, US Navy, US Marine Corps, and numerous other military forces, police agencies, and special teams worldwide.

Superior situational awareness

Dangerous situations happen suddenly. With both eyes open, you see the target as well as the surroundings. You instinctively place the red dot on the target, and you're ready to pull the trigger. When your life depends on it, don't settle for anything less.

READY FOR ANY PLATFORM

Aimpoint offers a full line of sighting solutions for a wide range of platforms. High-quality mounts and accessories allow the sights to be customized and adapted for specific needs. Aimpoint magnifiers work perfectly with our red dot sights, utilizing the red dot in the optic as the aiming reticle.



PDW





SYSTEM OF SYSTEMS

Integrated combat optics solution

Aimpoint supplies sophisticated modular sighting systems and offers end users not just stand-alone products but complete modular optical solutions. Although the primary focus for Aimpoint has always been the electronic reflex collimator (red dot) sight, we also offer a choice of modular accessories that enhance operators' capabilities.

Customize your sight

Aimpoint sights can be customized with a wide range of mounts, accessories, spacers and lens covers to meet the demands of your specific mission and equipment. If you want to upgrade your sight, see page 34-39.

STANDARD FEATURES ON ALL AIMPOINT SIGHTS

- Increased aiming confidence and hit probability
- Unlimited field of view
- Absence of parallax No centering needed
- Unlimited eye relief
- Operational in extreme weather conditions
- Extremely rugged, durable construction
- No hazardous materials
- No laser emission that could be harmful to your eyes
- Reduced training time and ammunition consumption
- Battery life measured in years





AIMPOINT® ACRO

The Acro™ is the smallest professional grade, enclosed red dot series of sights for pistols and other platforms available today. It features the latest LED technology, new electric circuitry, a battery that provides 50,000 hours of continuous-on and a wide range of mounting solutions for most pistols as well as carbines and hunting rifles.



KEY FEATURES

- · Lightweight, low-profile optic
- Fully enclosed housing protects electronic components
- CR2032 battery provides 5 years of continuous-on operation
- Front and rear lens covers available separately
- Designed for direct integration onto optic ready pistol slides
- Can be mounted on any Aimpoint Micro sight mount via the Acro mount plate with Micro interface
- Can be used as a secondary sight on magnifying rifle scopes
- Battery installation while optic is still mounted on weapon
- NVD Compatible



Aimpoint Acro[™] P-2

The Acro™ P-2 is now available in two Ceracote editions: Sniper Grey and FDE. Cerakote® finishes are known worldwide for their corrosion and chemical resistance, UV and thermal stability, and durability under extreme conditions.

ACRO P-2™



- Oot size 3.5 MOA
- Battery life 50,000 h
- Battery type CR2032 (3V)
- ON Power switch Push buttons
- Weight (sight only) 61 g / 2.2 oz



- Dot size 3.5 MOA
- Battery life 50,000 h
- Battery type CR2032 (3V)
- ON Power switch Push buttons
- Weight (sight only) 61 g / 2.2 oz



- Dot size 3.5 MOA
- Battery life 50,000 h
- Battery type CR2032 (3V)
- ON Power switch Push buttons
- Weight (sight only) 61 g / 2.2 oz

Accessories



Flip-up Front Cover Solid / black With ARD filter. For Acro P-2 ITEM NO. 200751



Flip-up Front Cover Transparent With ARD filter. For Acro P-2. ITEM NO. 200752



Flip-up Front Cover Solid / black For Acro P-2. ITEM NO. 200747



Flip-up Rear Cover Solid / black For Acro P-2. ITEM NO. 200748



Flip-up Front Cover Transparent For Acro P-2. ITEM NO. 200749



Flip-up Rear Cover Transparent For Acro P-2. ITEM NO. 200750

The availability of different mounts and mounting plates make it possible to mount the Acro sight on several weapon platforms.

For information about more Acro mounting solutions adapted for specific weapon types please see page 38.









AIMPOINT® DUTY RDS

The Duty RDS™ offers a bright, crisp 2 MOA dot that's ideal for short to medium range target engagements. All windage and elevation adjustments are flush mounted and waterproof. The turrets provide audible "clicks" when zeroing the optic. The dot brightness intensity switch is a digital keypad with intuitive push buttons.



KEY FEATURES


- A compact, high-grade red dot reflex optic that offers a bright, crisp 2 MOA dot
- One-piece Torsion Nut Mount Integral Picatinny-style base allows easy attachment to any picatinny rail
- Flip-up lens covers included. Front is solid, and rear is transparent.
- Windage and elevation adjustments are flush mounted and waterproof - eliminating the need for protective caps
- Digital keypad with intuitive push buttons that can easily be manipulated while wearing gloves
- NVD Compatible

DUTY RDS™



- Dot size 2 MOA
- Battery Life 30,000 h
- Battery Type CR2032 (3V)
- Submersible to 25 m
- NVD compatible
- Weight (sight only) 110 g
- Mounting solution std. config
 Duty RDS one-piece torison
 mount 39 mm

Also available with a one-piece torison nut mount for 30 mm optical axis height.

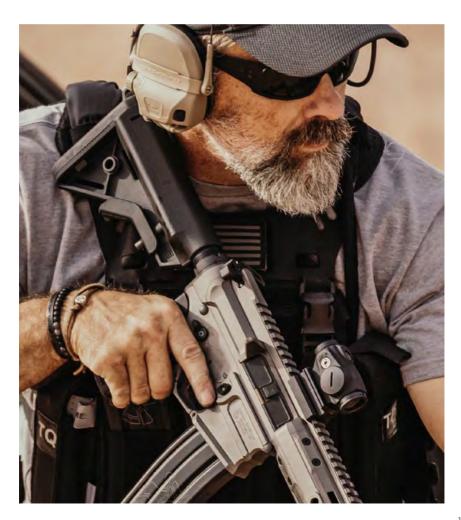

AIMPOINT® MICRO

The Aimpoint Micro™ series delivers exceptional optical performance, while adding negligible size and weight. Unparalleled in mounting solutions, the Micro series is the top choice for speed and accuracy for virtually any application. The Micro sights are built to handle heavy recoil and is extremely user-friendly for any skill level.



KEY FEATURES

- Extremely rugged, durable construction
- Front and rear transparent lens covers included
- Reinforced turret protection for even greater ruggedness
- 12 intensity settings for use in daylight and low light conditions
- Fits most firearms there are plenty of mounting solutions available
- Can be used as a secondary sight on magnifying rifle scopes
- Compatible with all Aimpoint Magnifiers
- NVD Compatible

MICRO™ T-2



- O Dot size 2 MOA
- Battery Life 50,000 h
- Battery Type CR2032 (3 V)
- ON Power switch Rotary switch
- Weight (sight only) 94 g / 3.3 oz
- **Weight (std. config)** 130 g / 4.6 oz
- Mounting solution std. config
 Micro™ standard mount for Weaver /
 Picatinny (20 mm optical axis height)



AIMPOINT® COMP

The Aimpoint Comp™ series of reflex sights is combat- proven and widely touted by professional users as the highest quality red dot optic available. The Comp series of sights are the standard infantry soldier sight in many NATO countries. There are more than 2 million Comp series sights in use worldwide.



KEY FEATURES

- Constant-on models of the Comp series can achieve
 5 to 8 years of constant-on use with one AA or AAA battery
- For use at longer range compatible with Aimpoint 3X and 6X magnifiers.
- Fully submersible (up to 45 meters)
- Compatible with all generations NVD
- 2 MOA red dot size, suitable for both close and long ranges.
- Offered in a standard ready to use configuration including mounts and lens covers, but with plenty of alternative mounting solutions and accessories for specific weapon platforms and needs.
- NVD Compatible

COMPM4/COMPM4s™





O Dot size 2 MOA



Battery Life 80,000 h



Battery Type AA, Alk./Lit.



ON) Power switch Rotary switch



Weight (sight only) 268g / 9.5 oz



Weight (std. config) 375 g / 13.2 oz



Mounting solution std. config QRP2 Mount and Standard Spacer (39 mm optical axis height)





More tech details on page 40-41. Specifications are subject to change without notice.





Standard configuration

Ballistic Adjustable Mount for Aimpoint® COMPM4

BAM is an ambidextrous quick-detachable Aimpoint® CompM4 mount used by European NATO forces. It features built-in ballistic compensation for 5.56 NATO or 7.62 NATO ammunition, offering high repeatability for specific distances. The BAM allows aiming with the CompM4 beyond 200 meters without holdovers. Designed for use with Aimpoint® CompM4, it can also accommodate Aimpoint® 3XMAG-1 or 6XMAG-1 magnifiers. The optic can be replaced using a Picatinny interface in the bridge cradle. To operate, use the lowest setting up to 200 meters; for longer distances, adjust the knobs forward to the desired range.





COMPM5/COMPM5S™





- Dot size 2 MOA
- Battery Life 50,000 h
- Battery Type AAA, Alk./Lit. (1,5V)
- ON Power switch Rotary switch
- Weight (sight only)
 148 g / 5.2 oz (CompM5)
 165 g /5.8 oz (CompM5s)
- Weight (std. config)
 238 g / 8.4 oz (CompM5)
 235 g /8.3 oz (CompM5s)
- Mounting solution std. config LRP Mount and Spacer (39 mm optical axis height)

Optimized for Aimpoint Magnifiers, CEU (see page 22-24). and with all generations NVDs (Night Vision Devices).

Powered by a single AAA battery, and weighing just 148 g (5.2 oz), the CompM5 takes its place as the most compact optic in the Aimpoint Comp series. The CompM5 has a top-mounted battery compartment while the CompM5s has a low battery compartment – this is the only difference between these two sights.







AIMPOINT® PRO

The rugged PRO™ sight comes in a ready-to-go kit at a budget friendly price. It has a 2 MOA red dot that allows for fast target acquisition. The hard anodized, high strength aluminum housing provides unmatched protection. The PRO sight contains a QRP2 mount and a standard AR15 spacer.



More tech details on page 40-41. Specifications are subject to change without notice.

- Dot size 2 MOA
- Battery Life 30,000 h
- Battery Type DL1/3N
- (ON) Power switch Rotary switch
- (a) Weight (sight only) 193 g / 6.8 oz
- (a) Weight (std. config) 364 g / 12.8 oz
- Mounting solution std. config
 QRP2 Mount, Base & Top Ring and
 Standard Spacer (39 mm optical
 axis height)



AIMPOINT® MPS3

Aimpoint MPS3™ (Multi Purpose Sight) is a passive electronic reflex collimator sight designed for use on medium and heavy weapons. The MPS3 is ideal for use on land vehicles, helicopters or fast attack boats and ships. Export license/End-user certificate is required for this product.

MPS3





Dot size 2 MOA



Battery Life 80,000 h



Battery Type AA, Alk./Lit.



Power switch Rotary switch



Weight (sight only) 736 g / 26.0 oz



Weight (std. config) 1230 g / 43.4 oz

MGMOUNT for MPS3

Aimpoint MGMount contains a user friendly 3-step ballistic compensator with preset range adjustments which can be quickly changed by the operator without losing eye contact with the target. The MGMount is compatible with all MIL-STD-1913 Picatinny rails. A separate QD rail adaptor for M2 HMG is also available.



AIMPOINT® MAGNIFIERS

Aimpoint magnifiers utilize the red dot in Aimpoint sights as the aiming reticle, eliminating the need for re-zeroing when shifting between non-magnified and magnified aiming. They are encased in a shock-absorbing rubber cover that also creates an ideal ergonomic grip. Internal adjustments make aligning the magnifier and sight quick and easy.



KEY FEATURES

- Compatible with Aimpoint red dot sights for longer range aiming or observation
- No re-zeroing needed when shifting between non-magnified and magnified aiming
- Can quickly be detachted from the TwistMount™ or flipped to the side whit the FlipMount™
- Can also be used as a handheld monocular
- Legendary Aimpoint ruggedness



3X-P™



Optical system

(3X)

Magnification 3X



Field of view (FOV) 7°



Dioptric adjustment ± 2.0 D

Physical specification

 (\longrightarrow)

Length 103 mm / 4.1 in



Weight 203 g / 7.2 oz

The Aimpoint® 3X-P Magnifier is a professional grade premium military standard approved optic designed to increase capabilities for observation or target acquisition at longer distances. Featuring a variable dioptric setting (-2 to +2), allowing the magnifier to be adjusted to the individual user's eye. Whether it is paired with a red dot sight by Aimpoint or used as a hand-held monocular, the 3X-P™ provides a crisp sight picture with a generous field of view. 3X-P is submersible to 25 m (80 feet).

3X-C™



Optical system



Magnification 3X



Field of view (FOV) 6°



Dioptric adjustment ± 2.0 D

Physical specification



Length 103 mm / 4.1 in



Weight 203 g / 7.2 oz

Aimpoint 3X-C was developed for both civilian end user and law enforcement. It can be used in conjunction with all Aimpoint sights for long-range aiming or observation. A variable (-2 to +2) dioptric setting allows this magnifier to be adapted to the individual shooter's eye. The 3X-C can also be used as a handheld 3X monocular. 3X-C is submersible to 0.5 m (2 feet).

3XMAG-1



Optical system



Magnification 3X



Field of view (FOV) 7°



Dioptric adjustment ± 3.0 D

Physical specification



Length 117 mm / 4.6 in



Weight 230 g / 8.1 oz

The 3XMag-1 is for the professional user that needs a more rugged and military standard proven product. It can be used in conjunction with all Aimpoint sights for long-range aiming or observation. Variable (-3 to+3) dioptric setting allows it to be adapted to the individual operator's eye. It can also be used as a handheld 3X monocular. 3XMag-1 is submersible to 25 m (80 feet).

6XMAG-1™



Optical system



Magnification 6X



Field of view (FOV) 3°



Dioptric adjustment \pm 3.0 D

Physical specification



Length 151 mm / 6.0 in



Weight 250 g / 8.8 oz

Aimpoint 6XMag-1 was designed for use with the Aimpoint Micro T-2, CompM5, and CompM5s. It gives professional users enhanced capability for long-range aiming and observation. A variable (-3 to +3) dioptric setting allows it to be adapted to the individual operator's eye. It can also be used as a handheld 6X monocular. 3XMag-1 is submersible to 25 m (80 feet).

Mechanical interface

The Aimpoint FlipMount can be used with Aimpoint magnifiers and is a quick attach/detach mount that can be quickly flipped in or out of the optical axis. Another recommended mount is the Aimpoint TwistMount, which allows for quick attachment on any MIL-STD 1913 Picatinny Rail.

AIMPOINT® CEU

Aimpoint CEU gives the operator the ability to observe and/or engage a threat from a concealed or covered position. It easily rotates from side to side, so an operator can safely look around corners, over barricades and under vehicles. It can also be quickly removed in order to rapidly return to direct engagement.



CEU™







See page 37 for more details about the TwistMount and CEU rings

Optical system



Operating Principle Dual mirror reflective device for true target viewing



Magnification 1X (unlimited eye reliefe)

Physical specification



Size x W x H 87 x 103 x 43 mm / 3.4 x 4.0 x 1.7 in



Weight 130 g / 4.6 oz



Material housing High strength glass fiber reinforced polymer, black, non-glare finish

Environmental specifications



Temperature Range (Storage) -45 °C to + 71 °C / -49 °F to +160 °F



Temperature Range (Operation) +5 °C to + 55 °C / + 41 °F + 131 °F



Water resistance 25 m / 80 ft.

Mechanical interface

The Aimpoint CEU rotates a full 260° allowing the operator to safely look around either right or left-hand corners, up staircases or down tunnels from almost any angle. To mount the CEU, use the Aimpoint TwistMount base and choose the CEU ring which allows co-witnessing with the Aimpoint sight.



See page 37 for more details about TwistMount and CEU rings.

Accessories



Flip-up Front Cover Solid / Black For PRO & Comp sights* ITEM NO. 12223



Flip-up Rear Cover Solid / Black For PRO & Comp sights* ITEM NO. 12224



Flip-up Front Cover Transparent For PRO & Comp sights* ITEM NO. 12241



Flip-up Rear Cover **Transparent** For PRO & Comp sights* ITEM NO. 12240



Flip-up Front Cover Solid / Black For MPS3 sights ITEM NO. 200101



Flip-up Rear Cover Transparent For MPS3 sights ITEM NO. 200102



Flip-up Front **Cover Transparent** For Micro T-2 & CompM5 sights ITEM NO. 200192



Flip-up Rear **Cover Transparent** For Micro T-2 & CompM5 sights ITEM NO. 200193



Flip-up Front Cover Solid / Black For Micro T-2 & CompM5 sights ITEM NO. 200191



Flip-up Rear Cover Solid / Black For Micro T-2 and CompM5 sights ITEM NO. 200202



Lens Cover Bikini Rubber For Micro T-1 sights **ITEM NO. 12204**



Lens Cover Bikini For PRO and CompM3 mounted with Quick Release ITEM NO. 12228



ARD Filter ARD filter (Anti Reflection

Device) for PRO & Comp sights* **ITEM NO. 12239**



Flip-Up Front Cover with Flip-up ARD Solid / Black (closed & open) For PRO & Comp sights*





Flip-Up Front Cover with ARD Transparent (closed & open) For PRO & Comp sights* ITEM NO. 200122



Rubber Bikini Lens CoverFor CompM4 sights
ITEM NO. 12205



Flip-Up Front Cover with ARD Transparent (closed & open). For Micro T-2 & CompM5 sights



Flip-up Front Cover Solid / Black For Acro P-2 sights ITEM NO. 200747



Flip-up Rear Cover Solid / Black For Acro P-2 sights ITEM NO. 200748



Flip-up Front Cover Transparent For Acro P-2 sights ITEM NO. 200749



Flip-up Rear Cover Transparent For Acro P-2 sights ITEM NO. 200750



Flip-Up Front Cover with ARD Solid / Black For Acro P-2 sights ITEM NO. 200751



Flip-up Front cover with ARD Transparent For Acro P-2 sights ITEM NO. 200752



AAA Battery Alkaline 4 pcs For CompM5 and CompM5s sights ITEM NO. 200443



AA Battery Alkaline 4 pcs For CompM4 and MPS3 sights ITEM NO. 12242



Outer Rubber Cover Color: Dark Earth BrownFits CompM3 and PRO sights ITEM NO. 12226



Outer Rubber Cover Color: Black Fits CompM3 and PRO sights ITEM NO. 12225



DL1/3N Lithium Battery 10 pcs For PRO & CompM3 sights ITEM NO. 10903



CR 2032 Lithium Battery 2 pcs For Micro & Acro P-2 series sights ITEM NO. 12211



CR 1225 Lithium Battery 10 pcs For Acro P-1 sights ITEM NO. 13851



Aimpoint Tool Universal tool with T10 for Aimpoint products ITEM NO. 12207

Mounting solutions



QRP2 Mount

Quick Release Picatinny (MIL-STD 1913) Mount. For CompM4 or PRO with Base & Top Ring. Return to zero after dismounting (Spacer is necessary for M4 flat top rifles and carbines)

ITEM NO. 12195*



TNP Mount

Torsion Nut Picatinny (MIL-STD 1913) Mount for CompM4, PRO and Base & Top Ring

ITEM NO. 12197*



LRP Mount

Lever Release Picatinny Mount for CompM4, PRO and Base & Top Ring. Return to zero after dismounting. Screws, Allen key and thread sealer included

ITEM NO. 12198



Base & Top Ring

For PRO. Base and Top 30 mm ring. Fits QRP2, QRW2, LRP and TNP Mounts

ITEM NO. 12194*



Standard Spacer

Spacer for CompM4 and PRO. Spacer raises height of optical axis from 30 to 39 mm

ITEM NO. 12192*



Extension Spacer

Spacer for CompM4 and PRO. Spacer raises height of optical axis from 30 to 39 mm and brings sight 40 mm forwards

ITEM NO. 12193*



QRP3 Mount

Quick Release Picatinny (MIL-STD 1913) Mount 30 mm. For CompM3 or PRO.

ITEM NO. 12923*



Ring 30 mm

Low Wide Ring, 30 mm Black. For CompM3 or PRO. Fits on Weaver and Picatinny rail

ITEM NO. 200286*



Spacer

Spacer for Base & Top Ring, Ring, QRP3 mount and TwistMount Ring. Raises height of optical axis from 30 to 39 mm

ITEM NO. 12227*



Micro LRP Mount

Lever Release Picatinny Mount for Micro and CompM5 series sights. Returns to zero after dismounting. Screws, Aimpoint Tool and thread sealer included

ITEM NO. 12905



Micro Standard Mount

Picatinny rail (MIL-STD 1913) mount for Micro and CompM5 series sights. Returns to zero after dismounting. Screws, thread lock and Aimpoint tool inluded

ITEM NO. 200388



Spacer 39 mm

Spacer for CompM5s. Raises optical axis to 39 mm. Incl. screws, tool and thread lock



Micro Spacer 30 mm

For Micro T-2 and CompM5. Raises height of optical axis to 30 mm. Four screws (torx), Aimpoint Tool and thread sealer included

ITEM NO. 12357





CEU Ring - High Rise

Ring for CEU. Fits on TwistMount Base, 39 mm height of optical axis

ITEM NO. 12203



Picatinny Adapter Ring 34 mm

For mounting a secondary sight on magnifying scope with 34 mm tube

ITEM NO. 200153*



TwistMount Base

Separate base for Twist-Mount/FlipMount and CEU rings. Fits on Picatinny rail (MIL-STD 1913)

ITEM NO. 12236

FlipMount

A quick attach/detach mount that can be quickly flipped in or out of the optical axis. Complete with TwistMount base. For Aimpoint magnifiers or other optical equipment with a 30 mm tube. Micro tool included.



Micro Spacer 33 mm

For Micro T-2 and CompM5. Raises height of optical axis to 33 mm. Four screws (torx), Aimpoint Tool and thread sealer included

ITEM NO. 200348



CEU Ring - Low Rise

Ring for CEU. Fits on TwistMount Base, 30 mm height of optical axis

ITEM NO. 12202



FlipMount Ring 30 mm

Separate FlipMount ring for TwistMount base. 30 mm optical axis

ITEM NO. 200248*



TwistMount

Complete Quick Release Mount for 3X-C, 3XMag-1 and 6XMag-1. Optical axis 30mm. Fits on Picatinny rail (MIL-STD 1913)

ITEM NO. 12234*



Micro Spacer 39 mm

For Micro and CompM5. Raises height of optical axis to 39 mm for cowitness with AR15. Four screws (torx). Aimpoint Tool and thread sealer included

ITEM NO. 12358



Picatinny Adapter Ring 30 mm

For mounting a secondary sight on magnifying scope with 30 mm tube

ITEM NO. 200152*



FlipMount Ring 39 mm

Separate FlipMount ring for TwistMount base. 39 mm optical axis

ITEM NO. 200249*



TwistMount Ring

Separate ring for TwistMount

ITEM NO. 12238*



FlipMount

(30 mm height of optical axis)

ITEM NO. 200250



FlipMount

(39 mm height of optical axis)

^{*}Screws and Allen key included

Mounting solutions for the Acro™ series



Acro QD Mount 22 mm

Quick Detachable Mount for Acro sights. Raises height of optical axis to 22 mm. Fits on Weaver and Picatinny rail.

ITEM NO. 200517



Acro Mount 22 mm

Fixed mount for Acro sights. Raises the optical axis to 22 mm. Fits Weaver/Picatinny rails.

ITEM NO. 200666



Acro QD Mount 30 mm

Quick Detachable Mount for Acro sights. Raises height of optical axis to 30 mm. Fits on Weaver and Picatinny rail.

ITEM NO. 200518



Acro 45° Angle Mount

Mounts on a Picatinny rail (MIL-STD 1913). Gives the Aimpoint Acro sight a 45° angle. Can be mounted either to the right or to the left.

ITEM NO. 200697



Acro QD Mount 39 mm

Quick Detachable Mount for Acro sights. Raises height of optical axis to 39 mm. Fits on Weaver and Picatinny rail.

ITEM NO. 200519



Acro Mount Plate for Micro Interface

The Acro adapter plate allows for compatibility with all Micro sights mounting solutions.

ITEM NO. 200526



Acro Rear Sight Mount Plate for Glock

For mounting Acro s ights on Glock handguns without the optic ready system.

ITEM NO. 200622



Acro Rear Sight Mount Plate for Beretta APX

For mounting Acro sights on Beretta APX handguns without the optic ready system.

ITEM NO. 200614



Acro Mount Plate for RMR Interface

For mounting Acro sights on RMR interface.

ITEM NO. 200602



Acro Rear Sight Mount Plate for CZ P-10

For mounting Acro sights on CZ P-10 handguns without the optic ready system.

ITEM NO. 200663



Acro Rear Sight Mount Plate for CZ Shadow 2

For mounting Acro Sights on optic ready CZ Shadow 2 handguns.

ITEM NO. 200698



Acro Adapter Ring 30 mm

For mounting of an Aimpoint Acro series sight as a secondary sight on magnifying scope with 30 mm tube.

ITEM NO. 200681



Acro Adapter Ring 34 mm

For mounting of an Aimpoint Acro series sight as a secondary sight on magnifying scope with 34 mm tube.

Additional Acro mount plates available for optic ready handguns only

Acro Mount Plate Glock MOS

For mounting Acro sights on optic ready Glock MOS handguns.

ITEM NO. 200520

Acro Mount Plate S&W M&P9

For mounting Acro sights on optic ready Smith & Wesson M&P9 gen 1 handguns.

ITEM NO. 200523

Acro Mount Plate Sig Sauer X5

For mounting Acro sights on optic ready Sig Sauer X-Five handguns.

ITEM NO. 200576

Acro Mount Plate FNX-45 Tactical

For mounting Acro sights on optic ready FNX-45 Tactical handguns.

ITEM NO. 200579

Acro Mount Plate for HK SFP9

For mounting Acro sights on optic ready HK SFP handguns.

ITEM NO. 200521

Acro Mount Plate Beretta APX

For mounting Acro sights on optic ready Beretta APX handguns.

ITEM NO. 200524

Acro Mount Plate CZ Shadow 2 OR

For mounting Acro sights on optic ready CZ Shadow 2 OR handguns.

ITEM NO. 200577

Acro Mount Plate Silencerco Maxim 9

For mounting Acro sights on optic ready Silencerco Maxim 9 handguns.

ITEM NO. 200580

Acro Mount Plate for CZ P-10

For mounting Acro sights on optic ready CZ P-10 C OR handguns.

ITEM NO. 200522

Acro Mount Plate Sig Sauer P320

For mounting Acro sights on optic ready Sig Sauer P320 handguns.

ITEM NO. 200525

Acro Mount Plate Walther Q5 Match

For mounting Acro sights on optic ready Walther Q5 Match handguns.

ITEM NO. 200578

Acro Mount Plate Sig Sauer P320/M17

For mounting Acro sights on optic ready Sig Sauer P320/M17 handguns.



TECHNICAL SPECS

SPECIFICATION	ACRO P-2	MICRO T-2	COMPM4 COMPM4S	
Dot size	3.5 MOA	2 MOA	2 MOA	
Battery life	50,000 h ^p	50,000 h ^A	80,000 h ^c	
Battery type	CR2032 (3V)	CR2032 (3V)	AA, Alk. / Lit.	
Power switch	Push buttons	Rotary switch	Rotary switch	
Night Vision Device (NVD) settings	4	4	7	
Daylight (DL) settings	6	8	9	
Water resistance	35 m 115 ft.	25 m 80 ft.	45 m 150 ft.	
Adjustment 1 click =	20 mm at 100 m 0.7 in at 100 yds	13 mm at 100 m 0.5 in at 100 yds	16 mm at 100 m 0.6 in at 100 yds	
Size L × W × H (sight only)	47 × 33 × 31 mm 1.9 × 1.3 × 1.2 in	68 × 41 × 36 mm 2.7 × 1.6 × 1.4 in	CompM4: 120 x 51 x 57 mm 4.7 x 2.0 x 2.2 in CompM4s: 120 x 53 x 59 mm 4.7 x 2.1 x 2.3 in	
Weight (sight only)	61 g 2.2 oz	94 g 3.3 oz	268 g 9.5 oz	
Lens covers (std config.)	Flip-up lens covers available	Flip-up lens covers	Bikini lens cover (Flip-up lens covers available)	

MAGNIFIERS	3X-C	3X-P	3XMAG-1	6XMAG-1
Magnification	3X	3X	3X	6X
Field of view (FOV)	6°	7°	7°	3°
Dioptric adjustment	± 2.0 D	± 2.0 D	± 3.0 D	± 3.0 D
Water resistance	0.5 m 1.6 ft.	25 m 80 ft.	25 m 80 ft.	25 m 80 ft.
Size L × W × H	103 × 45 × 45 mm 4.1 × 1.8 × 1.8 in	103 x 46 x 46 mm 41 x 1.8 x 1.8 in	117 × 43 × 43 mm 4.6 × 1.9 × 1.7 in	151 × 47 × 43 mm 6.0 × 1.9 × 1.7 in
Weight	203 g 7.16 oz	203 g 7.16 oz	230 g 8.1 oz	250 g 8.8 oz
Mechanical interface	Ø30 mm ring	Ø30 mm ring	Ø30 mm ring	Ø30 mm ring
Mounting options	TwistMount FlipMount	TwistMount FlipMount	TwistMount FlipMount	TwistMount FlipMount

COMPM5 COMPM5S	PRO	DUTY RDS	MPS3	
2 MOA	2 MOA	2 MOA	2 MOA	
50 000 h ^B	30 000 h ^B	30 000 h ^B	80 000 h ^c	
AAA, Alk. / Lit. (1.5V)	DL1/3N (3V)	CR2032 (3V)	AA, Alk. / Lit.	
Rotary switch	Rotary switch	Push buttons	Rotary switch	
4	4	4	7	
6	6	6	9	
45 m 150 ft.	45 m 150 ft.	25 m 80 ft.	1 m 3 ft.	
10 mm at 100 m 0.4 in at 100 yds	16 mm at 100 m 0.6 in at 100 yds	14 mm at 100 m ≈ 0.5 in at 100 yds	50 mm at 100 m 2.0 in in at 100 yds	
CompM5: 83 × 40 × 41 mm 3.3 × 1.6 × 1.6 in CompM5s: 83 × 40 × 48 mm 3.3 × 1.6 × 1.9 in	120 x 49 x 49 mm 4.7 x 1.9 x 1.9 mm	68 x 37 x 43 mm 2.7 x 1.5 x 1.7 in	175 × 86 × 82 mm 6.9 × 3.4 × 3.2 in	
CompM5: 148 g / 5.2 oz CompM5s: 165 g / 5.8 oz	193 g 6.8 oz	110 g 3.9 oz	736 g 26.0 oz	
Flip-up lens covers	Flip-up lens covers	Flip-up lens covers	Bikini lens cover (Flip-up lens covers available)	

BATTERY LIFE

- A: At daylight setting 8 (room temperature)
- B: At daylight setting 7 (room temperature)
- C: At daylight setting 12 (room temperature)
- D: At daylight setting 6 (room temperature)

DOT SIZE (MOA)

MOA (minute of angle) 1 MOA \approx 30 mm at 100 meters \approx 1 in at 100 yards.

WARRANTY INFORMATION

Aimpoint products are guaranteed to be free from original manufacturer defects in material and/or workmanship under normal use from the date of purchase for two (2) years for professional users.

GENERAL TECHNICAL DATA

	Acro P-2	CompM5 CompM5s	Micro T-2	CompM4 CompM4s	PRO	MPS3	Duty RDS
APPLICATION AREAS							
Law Enforcement	•	•	•	•	•	-	•
Armed Forces - Special Units	•	•	•	•	-	•	0
APPLICATION FIREARMS							
Handgun	•	-	0	-	-	-	•
Carbine/tactical rifle	•	•	•	•	•	-	•
PDW (personal defence weapon)	•	0	•	0	•	-	0
LMG (light machine gun)	0	•	0	•	-	-	•
MMG (medium machine gun)	0	•	0	•	-	0	•
HMG (heavy machine gun)	-	-	-	-	-	•	-

primary use o secondary use - not recommended

TECHNOLOGY

Working principle: Reflex collimator sight — red dot sight

OPTICAL DATA

- LED (Light Emitting Diode) totally eye-safe
- Light source wavelength, 650 nm red light
- Absence of parallax No centering required
- Unlimited eye relief
- Anti-reflex coating all surfaces & multi-layer coating objective lens
- No magnification (1X)

MECHANICAL DATA

- Material housing and tube, high strength aluminium
- · Surface finish housing, anodized, semi-matte

ENVIRONMENTAL DATA

- Temperature range -45 °C to +71 °C (-50 °F to +160 °F)
- Submersible, for more details see page 32
- No radioactive material used
- No laser emission

Specifications are subject to change without notice.

SPEED MEETS ACCURACY

In summary, an Aimpoint sight allows you to do what comes naturally – shoot with both eyes open while remaining focused on the target. Even in bad light and when the target is moving. When you look through an Aimpoint sight, a red dot appears in the lens. When the red dot is on target, so are you, with no centering required.

It is this combination of simplicity, speed, and accuracy that makes Aimpoint sights the ideal choice for beginners and experts alike.





Jägershillgatan 15 SE- 213 75 Malmö, Sweden Phone +46 (0)40 671 50 20 Fax +46 (0)40 21 92 38 E-mail: info@aimpoint.se

Unless otherwise indicated, displayed trademarks, logos, and service marks are subject to the trademark rights of either Aimpoint AB or third parties. Art. No. 011636