



The Original Since 1981

11750 Roscoe Blvd. Unit 1 Sun Valley, CA 91352


Email: info@falconstainless.com

www.falconstainless.com

TEL: (818) 767-3569

FAX: (818) 768-8533

Toll Free 1-800-814-8444

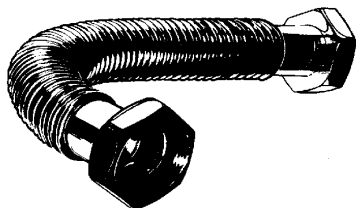

**Corrugated Stainless Steel Flexible
Water Heater/ Softener Connectors
Specification Sheet**

SPECIFICATION:

Furnish and install Corrugated Stainless Steel
Water Heater/Softener Connector

DESIGN FEATURES: Mega-flow SUPER Water-flex™

- 304 Series Stainless Steel
- Maintains optimum flow – no restriction
- Kink and Crimp Free
- Chrome plated brass nut
- Extremely Flexible
- Will not corrode or rust
- No Dielectric union required
- Highest Quality EPDM washer
- Resists work hardening
- Burst pressure approx 1850 psi
- 100% Leak Tested
- Working pressure 200 psi
- No Sweat Installation
- Lifetime Warrantee
- Temperature rating 40 – 250 degrees F
- Bright annealed

COMPLIANCES/LISTINGS:

- * ICC-ES PMG
- * ICC Listed, Tested & Certified
- * UPC, IPC, IMC, IRC (USA)
- * Low Lead Compliant California H & S Code 116875
- * ASME A112.18.6/CSA B125.6-2009 Compliant
- * NSF-61 (ICC-ES PMG Certified to ANSI/NSF section 9)
- * State of Wisconsin, Commonwealth of Massachusetts

Model #	Description	Length
SWC-1 x 12	1" FIP x 1" FIP	12"
SWC-1 x 18	1" FIP x 1" FIP	18"
SWC-1 x 24	1" FIP x 1" FIP	24"
SWC-1 x 36	1" FIP x 1" FIP	36"
SWC-1 x 48*	1" FIP x 1" FIP	48"
*48" length Not intended for use on water heaters		



ANSI/NSF 61



Compliant to AB1953

ASME A112.18.6

Product Submittal

Job Name: _____

Date: _____

Model# _____ Quantity: _____

Architect/Contractor: _____

