



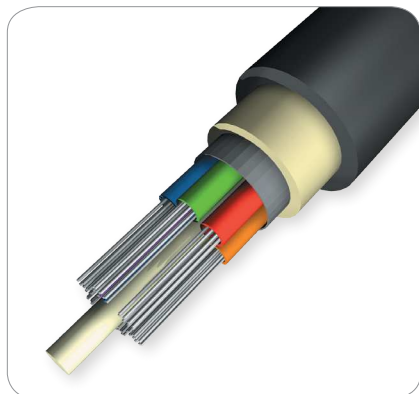

Non-Armored OSP Loose Tube (LE Series SJ)

Acting as the backbone for most of today's fiber based systems, stranded fiber optic cables play a critical role in the high speed network. AFL's Non-Armored Loose Tube fiber optic cables are designed to provide high fiber counts with the flexibility and versatility required for today's most demanding installations. With fiber counts up to 576 and S-Z strand designs for easy mid-span access, AFL's cables comply with EIA/TIA, REA/RUS PE-90 and GR-20. Industry standard designs combined with innovative technologies, such as a dry core product, yield a world class cable that will support today's and tomorrow's technological needs.

Cable Components

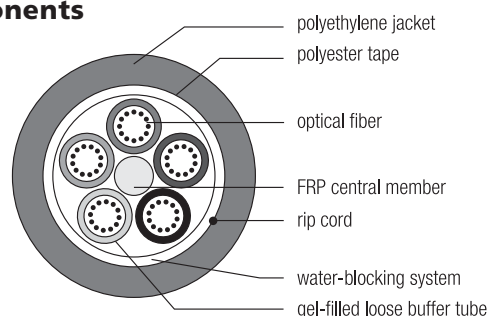

Product Applications

- Long Haul Networking
- Building Interconnections (Campus LAN)
- Trunking Lines Direct to Telecommunications Closet
- Local Loop
- Distance Learning
- Distribution
- Intrabuilding Backbones

Temperature Specifications

TEMPERATURE RANGE	
INSTALLATION	-30°C to +70°C
OPERATING	-40°C to +70°C
STORAGE	-40°C to +75°C

Typical Lengths

MAXIMUM LENGTHS*				
FIBER COUNT	SINGLE-MODE		MULTIMODE	
	FEET	METERS	FEET	METERS
6 - 60	22,900	7,000	22,900	7,000
72 - 96	22,900	7,000	22,900	7,000
108 - 120	22,900	7,000	22,900	7,000
132 - 144	22,900	7,000	22,900	7,000
146 - 216	22,900	7,000	22,900	7,000
218 - 288	16,400	5,000	16,400	5,000
290 - 432	14,100	4,300	14,000	4,300
434 - 576	10,800	3,300	11,000	3,300

* Longer lengths may be available upon request.

Fiber Specifications

FIBER TYPE	MAXIMUM ATTENUATION (DB/KM)				OVERFILL LAUNCH MIN. BANDWIDTH (MHZ•KM)		GIGABIT ETHERNET MIN. LINK DISTANCE (METERS)	
	850 NM	1300 NM	1310 NM	1550 NM	850 NM	1300 NM	850 NM	1300 NM
(6) 62.5/125 GIGA-Link™ 300	3.5	1.2	N/A	N/A	200	600	300	550
(5) 50/125 GIGA-Link™ 600	2.9	0.9	N/A	N/A	500	500	600	600
(L) 50/125 Laser-Link™ 300	2.9	0.9	N/A	N/A	1500	500	900	550
(9) Single-mode	N/A	N/A	0.35	0.25	N/A	N/A	N/A	5000
(Q) Non-zero Dispersion-shifted Single-mode	N/A	N/A	N/A	0.25	N/A	N/A	N/A	N/A
(K) AFL G.657.A1 Single-mode	N/A	N/A	0.35	0.25	N/A	N/A	N/A	5000

Gigabit Ethernet Minimum Link Distances are based on "bandwidth"/modal dispersion constraints. Actual link distances may be constrained by attenuation, depending on specific loss budget.

Non-Armored OSP Loose Tube (LE Series SJ)

Ordering Information

AFL NO.	FIBER COUNT	NUMBER OF TUBES/FIBERS	NOMINAL DIAMETER		NOMINAL WEIGHT		MAXIMUM TENSILE LOAD		MINIMUM BEND RADIUS	
			INCHES	MM	LBS/1,000FT	KG/KM	LBS (N)		INCHES (CM)	
							SHORT TERM	LONG TERM	SHORT TERM	LONG TERM
LE006★C5101N1	6	1w/6 (4 fillers)	0.41	10.5	56	83	600 (2670)	200 (890)	8.2 (21)	4.1 (11)
LE012★C5101N1	12	1w/12 (4 fillers)	0.41	10.5	56	84	600 (2670)	200 (890)	8.2 (21)	4.1 (11)
LE018★C5101N1	18	1w/12, 1w/6 (3 fillers)	0.41	10.5	57	85	600 (2670)	200 (890)	8.2 (21)	4.1 (11)
LE024★C5101N1	24	2w/12 (3 fillers)	0.41	10.5	57	85	600 (2670)	200 (890)	8.2 (21)	4.1 (11)
LE030★C5101N1	30	2w/12, 1w/6 (2 fillers)	0.41	10.5	58	86	600 (2670)	200 (890)	8.2 (21)	4.1 (11)
LE036★C5101N1	36	3w/12 (2 fillers)	0.41	10.5	58	86	600 (2670)	200 (890)	8.2 (21)	4.1 (11)
LE048★C5101N1	48	4w/12 (1 filler)	0.41	10.5	59	87	600 (2670)	200 (890)	8.2 (21)	4.1 (11)
LE060★C5101N1	60	5w/12 (no fillers)	0.41	10.5	60	89	600 (2670)	200 (890)	8.2 (21)	4.1 (11)
LE072★C6101N1	72	6w/12 (no fillers)	0.45	11.5	71	106	600 (2670)	200 (890)	9.0 (22)	4.5 (11.5)
LE084★C8101N1	84	7w/12 (1 filler)	0.52	13.3	90	135	600 (2670)	200 (890)	10.4 (27)	5.2 (14)
LE096★C8101N1	96	8w/12 (no fillers)	0.52	13.3	91	136	600 (2670)	200 (890)	10.4 (27)	5.2 (14)
LE108★CA101N1	108	9w/12 (1 filler)	0.59	15.1	117	174	600 (2670)	200 (890)	11.8 (31)	5.9 (16)
LE120★CA101N1	120	10w/12 (no fillers)	0.59	15.1	118	175	600 (2670)	200 (890)	11.8 (31)	5.9 (16)
LE132★CC101N1	132	11w/12 (1 filler)	0.67	17.0	147	219	600 (2670)	200 (890)	13.4 (34)	6.7 (17)
LE144★CC101N1	144	12w/12 (no fillers)	0.67	17.0	148	220	600 (2670)	200 (890)	13.4 (34)	6.7 (17)
LE216★CI301N1	216	18w/12 (no fillers)	0.69	17.4	150	224	600 (2670)	200 (890)	14.0 (35)	6.9 (18)
LE288★CO301N1	288	24w/12 (no fillers)	0.79	20.1	202	301	600 (2670)	200 (890)	17.3 (41)	7.9 (21)
LE432★IO301N1	432	24w/18 (no fillers)	0.87	22.0	242	360	600 (2670)	200 (890)	17.4 (44)	8.7 (22)
LE576★OO301N1	576	24w/24 (no fillers)	1.00	25.3	319	475	600 (2670)	200 (890)	20.1 (51)	10.2 (26)

Note: Diameter and weight subject to change without notice

★ Fiber Types – Replace asterisk (★) in AFL number with number in the Fiber Specifications table on previous page.

Reel Information

ITEM	REEL A		REEL B		REEL C		REEL D		REEL E	
	INCHES	CM	INCHES	CM	INCHES	CM	INCHES	CM	INCHES	CM
Reel Height	42	106.7	58	147.3	66	167.6	72	182.8	84	213.4
Reel Width Outside	36	91.4	38	96.5	42	106.7	42	106.7	40	101.6
Reel Width Inside	32	81.6	32	81.3	36	91.4	36	91.4	34	86.4
Drum Diameter	23	58.7	28	71.1	36	91.4	36	91.4	35	88.9
Arbor Hole Diameter	3	7.9	3	7.9	3	7.9	3	7.9	3	7.9
Reel Weight With Lagging	180 lbs	82 kg	420 lbs	191 kg	685 lbs	311 kg	710 lbs	320 kg	950 lbs	431 kg

AFL typically provides Loose Tube cable on several standard sizes of non-returnable wooden reels. Non-standard reel sizes are available upon request. Larger reel sizes may be required to accommodate long cable lengths.