



CABLE TO CABLE TO GROUND ROD OR OTHER ROUNDS



- Forms a permanent, low resistance connection
- Provides a molecular bond
- Cadweld Exothermic Connections are rated with the same current capacity as the conductor
- Portable installation equipment with no external source of power required
- Installers can be easily trained to make Cadweld Exothermic Connections
- Connections are visually inspected

NC MOLDS

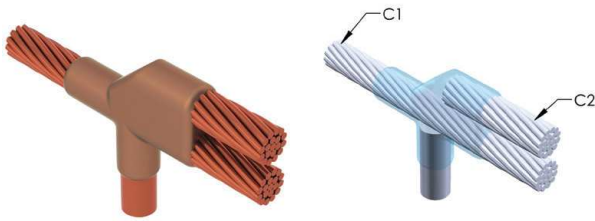

Global Part Number	Mold family	Price Key	Conductor 1	Conductor 2	Ground Rod Size, Nominal	Ground Rod Size Actual	Ground Rod Type	Welding Material Required	Ease of Use	Handle Clamp
NCF222V	NC	F	250 kcmil Concentric	250 kcmil Concentric	1"	0.914"	Copper-bonded	200 x 2 or 400PLUSF20	Preferred	L159, Sold Separately
NCF223D	NC	F	350 kcmil Concentric	350 kcmil Concentric	1"	0.914"	Copper-bonded	200 x 2 or 400PLUSF20	Preferred	L159, Sold Separately
NCF223Q	NC	F	500 kcmil Concentric	500 kcmil Concentric	1"	0.914"	Copper-bonded	250 x 3 or 750PLUSF20	Preferred	L159, Sold Separately
NCF313Q	NC	F	500 kcmil Concentric	500 kcmil Concentric	5/8"	0.625"	Steel	200 x 3 or 600PLUSF20	Preferred	L159
NCF333Q	NC	F	500 kcmil Concentric	500 kcmil Concentric	3/4"	0.750"	Steel	200 x 3 or 600PLUSF20	Preferred	L159
NCR142C	NC	R	1/0 Concentric	1/0 Concentric	1/2"	0.505"	Steel	115 or 115PLUSF20	Preferred	L160
NCR142G	NC	R	2/0 Concentric	2/0 Concentric	1/2"	0.505"	Steel	150 or 150PLUSF20	Preferred	L160
NCR142Q	NC	R	4/0 Concentric	4/0 Concentric	1/2"	0.505"	Steel	200 or 200PLUSF20	Preferred	L160
NCR161T	NC	R	#2 Solid	#2 Solid	5/8"	0.563"	Copper-bonded	115 or 115PLUSF20	Preferred	L160
NCR161T1G	NC	R	#2 Solid	#6 Solid	5/8"	0.563"	Copper-bonded	115 or 115PLUSF20	Preferred	L160
NCR161V	NC	R	#2 Concentric	#2 Concentric	5/8"	0.563"	Copper-bonded	115 or 115PLUSF20	Preferred	L160
NCR161Y	NC	R	#1 Concentric	#1 Concentric	5/8"	0.563"	Copper-bonded	115 or 115PLUSF20	Preferred	L160
NCR162C	NC	R	1/0 Concentric	1/0 Concentric	5/8"	0.563"	Copper-bonded	150 or 150PLUSF20	Preferred	L160
NCR162G	NC	R	2/0 Concentric	2/0 Concentric	5/8"	0.563"	Copper-bonded	200 or 200PLUSF20	Preferred	L160
NCR162G2Q	NC	R	2/0 Concentric	4/0 Concentric	5/8"	0.563"	Copper-bonded	250 or 250PLUSF20	Preferred	L160
NCR162Q	NC	R	4/0 Concentric	4/0 Concentric	5/8"	0.563"	Copper-bonded	250 or 250PLUSF20	Preferred	L160