
SYMMONS® Dia®

3594BTRM
Tub/Hand Shower Trim
Specification Submittal

Location:



Model Numbers

☐ **3594BTRM**
Dia HM Tub/Hand Shower Trim

Valve Options
-261 Series Temptrol® Shower Valve with TRM modifier
-161 Series Temptrol® Shower Valve requires TC modifiers

Feature Highlights

- Dia HM Tub/Hand Shower Trim.
- Requires Temptrol Pressure-Balancing Shower Valve.
- 30" slide bar.
- 7" diverter thread-on tub spout.
- 60" flexible metal hose.
- 7-mode HydroMersion® hand shower with Non-Positive Shutoff (NPSO).
- Dual check valves for backflow protection.
- Standard 2.0 GPM (7.6 L/min) flow restrictors.
- Components made from metal and nonmetal materials plated in standard Polished Chrome finish.

Modifications

☐	15 CG	1.5 GPM (5.7 L/min) flow restrictor
☐	Delete suffix B	Chrome plastic escutcheon on valve with color graphics/ indicators in place of standard brass escutcheon
☐	TC	Test Cap Trim (includes TA-10® & T-12A) used with 161 Series Temptrol Valve.
☐	STN	Satin Nickel finish
☐	MB	Matte Black finish
☐	BBZ	Brushed Bronze finish

Compliance

- ASME A112.18.1/CSA B125.1.
- WaterSense 1.5 GPM (5.7 L/min)/1.75 GPMm (6.6 L/min)/2.0 GPM (7.6 L/min).
- Lever handle meets ADA requirements for operation.

Warranty

Limited Lifetime - for residential installations.
10 Years - for commercial/industrial installations.
Refer to www.symmons.com/warranty for complete warranty information.

SKU Builder

Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	1L	Final SKU
3594				TRM			3594TRM
3594B	BBZ		15	TRM			3594BBBZ15TRM


Architectural/Engineering Specification

Symmons Dia HM Tub/Hand Shower Trim _____ Includes Dia HM Tub and Hand Shower Trim for the Temptrol® Pressure-Balancing Shower Valve. Features include 30" slide bar, 7" diverter thread-on tub spout, 60" flexible metal hose, 7-mode HydroMersion® hand shower with Non-Positive Shutoff (NPSO), dual check valves for backflow protection and standard 2.0 GPM (7.6 L/min) flow restrictors. Components made from metal and nonmetal materials plated in standard Polished Chrome finish. 10-Year Commercial Warranty. Lever handle meets ADA requirements for operation. ASME A112.18.1/CSA B125.1, WaterSense 1.5 GPM (5.7 L/min), 1.75 GPM (6.6 L/min), and 2.0 GPM (7.6 L/min) compliant. Available options: 15 = 1.5 GPM (5.7 L/min) flow restrictor, Delete Suffix B = Chrome plastic escutcheon, STN = Satin Nickel finish, MB = Matte Black finish, BBZ = Brushed Bronze finish, and TC = Test Cap Trim.

SYMMONS® Dia®

3594BTRM

Dimensions

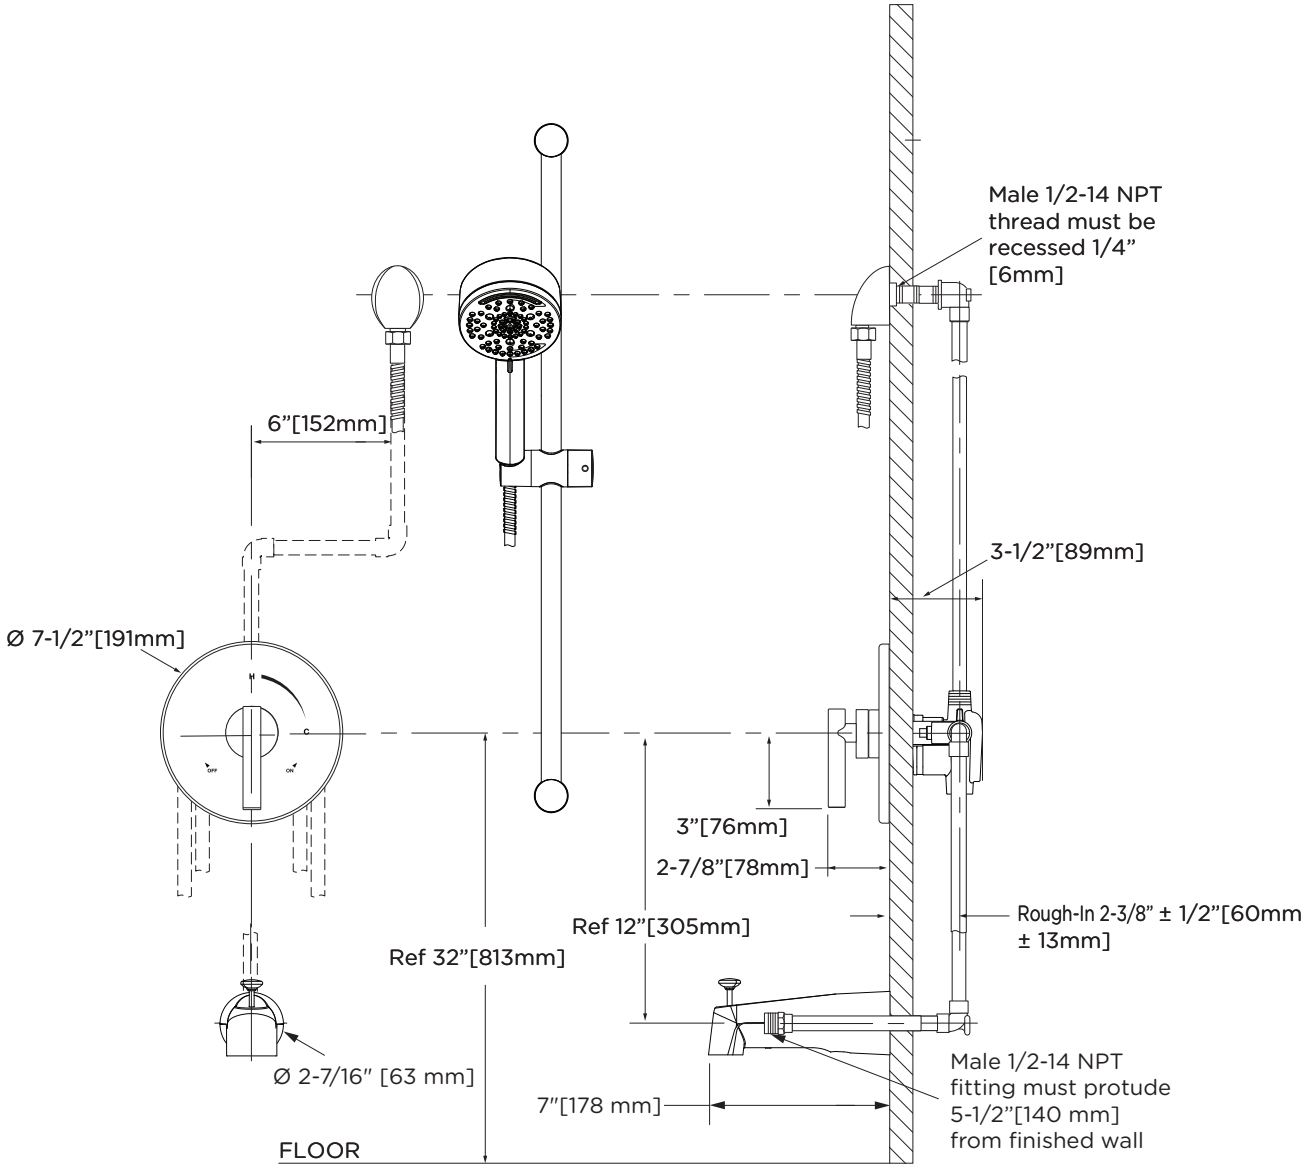

Notes:
1. Valve body and piping not included and shown as reference only.
2. Plaster shield (p/n T-176) from drywall, plaster, or other type walls 1/2" or greater.
3. All dimensions measured from nominal rough-in (see 2-3/8" ± 1/2"[60 mm ± 13 mm] as reference).
4. Dimensions are subject to change without notice.

Copyright © 2026 Symmons Industries, Inc. ▪ symmons.com ▪ gethelp@symmons.com ▪ ZV-4129 REV B ▪ 090126