


PB PANELBOARD STACK LUG

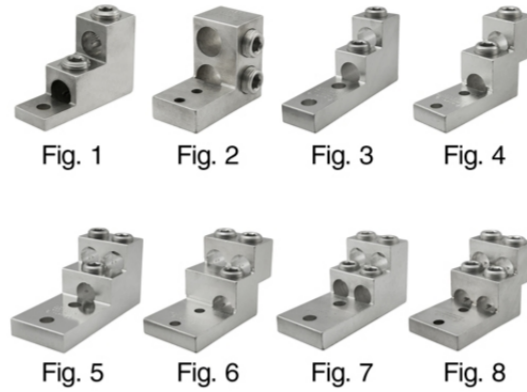

- Manufactured from high strength 6061-T6 aluminum alloy.
- Electro-Tin plated.
- UL 486A/B 90° C Listed and is CSA certified.
- Suitable for use in circuits rated 35KV or less; proper high voltage spacing and insulation techniques must be used.
- Stacked Design.
- Suitable for use with either copper or aluminum conductors.
- Chamfered wire entry provides ease of installation.
- UL File E6207

Item ID	Figure Number	Conductor Range	Bolt/Stud Size	Mounting Hole Spacing	Length	Width	Height	Hex Size	Number of Ports	Standard Package	NAED/UPC Number
PB4-750-2N	7	750 kcmil-1/0 AWG	1/2	1-3/4	5.6875	3.0625	3.0000	1/2	4	1	078366919536 1