


Alexandria



Colors

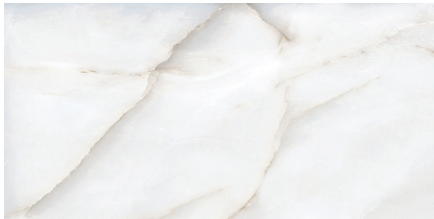


White
VTL AXWH




Ivory
VTL AXIV



Beige (V3)
VTL AXBE

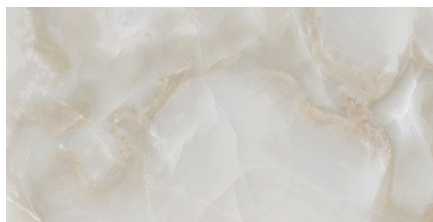


Light Gray
VTL AXLG

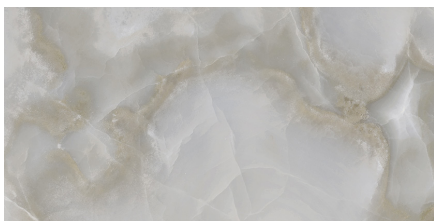


Dark Gray (V3)
VTL AXDG


Sizes



24" x 48" x 8mm Rectified



24" x 24" x 8mm
Rectified



12" x 24" x 8mm
Rectified

ALEXANDRIA

Field Tiles*

SIZE	ACTUAL	THICKNESS	FINISH
24" x 48" Rectified	24.00" x 48.00"	8.00mm	Matte & Polished
24" x 24" Rectified	24.00" x 24.00"	8.00mm	Matte & Polished
12" x 24" Rectified	12.00" x 24.00"	8.00mm	Matte & Polished

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

Mosaics & Coordinating Trims*

SIZE	ACTUAL	FINISH
3" x 6" Brick Mosaic Rectified	12.00" x 12.00"	Matte & Polished
2" x 2" Mosaic Rectified	12.00" x 12.00"	Matte & Polished
3" x 24" Bullnose Rectified	3.00" x 24.00"	Matte & Polished

Recommended Grout Joint: 1/8" - Rectified
3/16" - Non Rectified

Product Characteristics

	POLISHED
Breaking Strength (ASTM C648 or ISO 10545-4)	≥ 275lbf
Chemical Resistance (ASTM C650 or ISO 10545-13)	Resistant
DCOF	≥ 0.42
Deep Scratch Resistance - Unglazed (ISO 10545-6)	N/A
Frost Resistance (ASTM C1026 or ISO 10545-12)	Resistant
Mohs Hardness - EN101	N/A
Water Absorption (ASTM C373 or ISO 10545-3)	≤ 0.5%
Certifications	Greenguard Bureau Veritas NSF EPD
Country of Origin	USA
Shade Variation Code	V3

Application**

		WALL	FLOOR
Interior	Residential	•	•
Interior	Commercial	•	•
Interior	Heavy Commercial	•	
Exterior	Residential/Commercial	•	

** These recommendations are not defined by ANSI Standards

Material

Color-Body Porcelain



Made in USA



Stock and Import



V3 Moderate Variation



DCOF: ≥0.42



Greenguard, Bureau Veritas
NSF,EPD



Scan QR Code for
Product Information and
Installation Images

Request samples.

www.vitlsurfaces.com
samples@vitlsurfaces.com



VITL
SURFACES
COMMERCIAL