



Tools Required

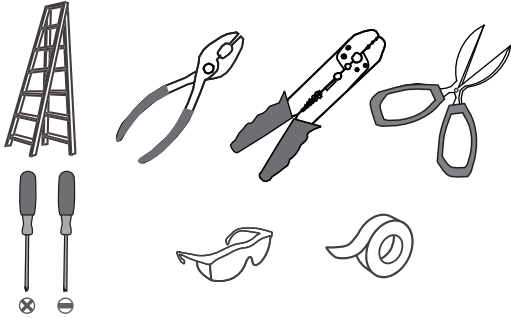

Light Source

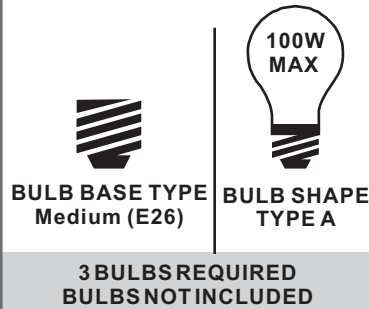

Fixture Height Adjustable 10.25" to 46.25"

⚠ Warnings and Cautions

Turn off the electricity at the circuit breaker before installation. Consult a licensed electrician if in doubt about installation.


Turn off power to the fixture and allow the bulbs to cool before replacing.

Package Contents

Preparation: Identify and inspect all parts before beginning the installation.

Missing or damaged parts? Contact your original place of purchase.


PARTS BAG




B Outlet Box Screw
x 2



C Wire Connector
x 3




D Ceiling Canopy
Assembly
x 1




E 6" L Rod
x 2

F 12" L Rod
x 2

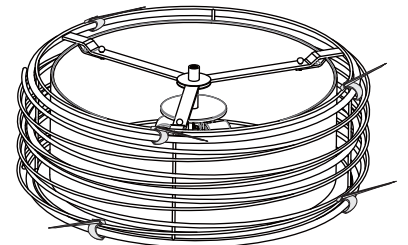

G Fixture Body
x 1




H Diffuser
x 1



I Nipple assembly
x 1


Table of Contents

Remove support cage




STEP 1

Crossbar Assembly




STEP 2

Ceiling Canopy Assembly & Downrod




STEP 3

Wiring




STEP 4

Ceiling Canopy




STEP 5

Nipple and Bulb



STEP 6

Diffuser




STEP 7

STEP 1


1

Cut straps

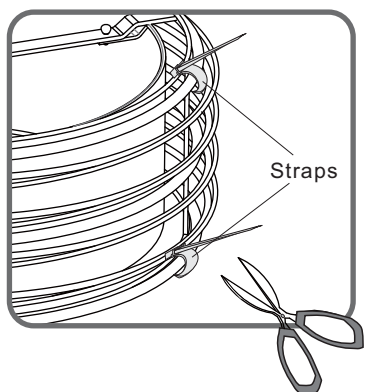

2


Remove support cage

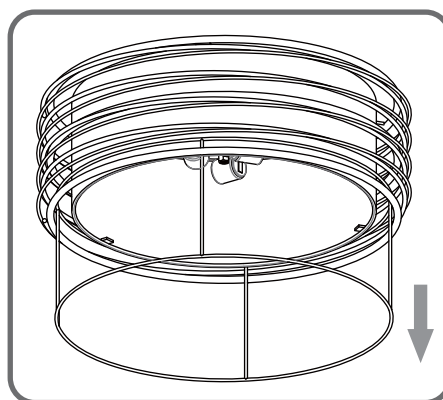

STEP 2


1

Step 1
Install crossbar assembly

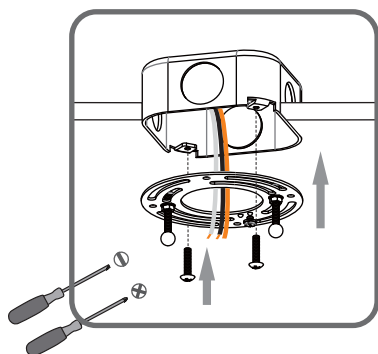


2

Step 2 - 3
Test fitting ceiling canopy to
mounting screws




3

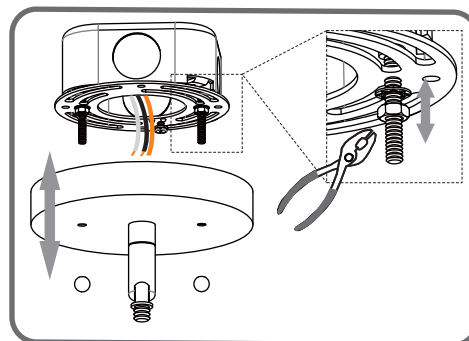


STEP 3

OPTION 1


Pendant — SPL2820K, SPL2820LG

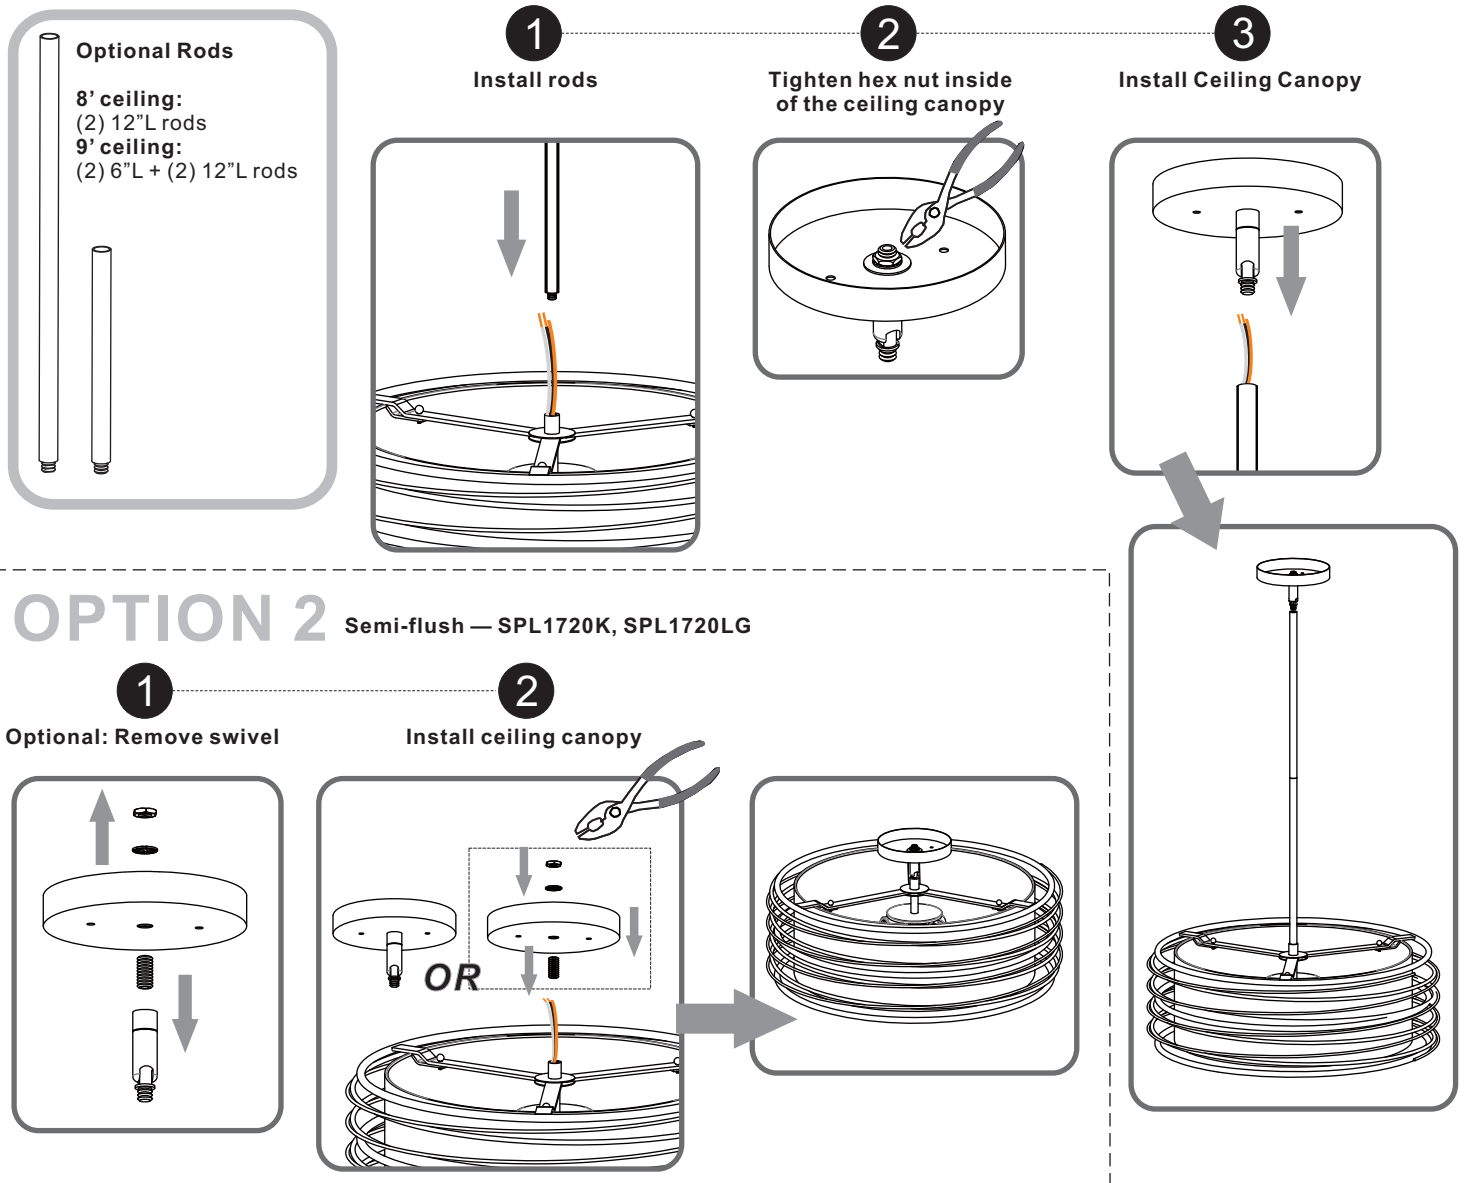

STEP 4

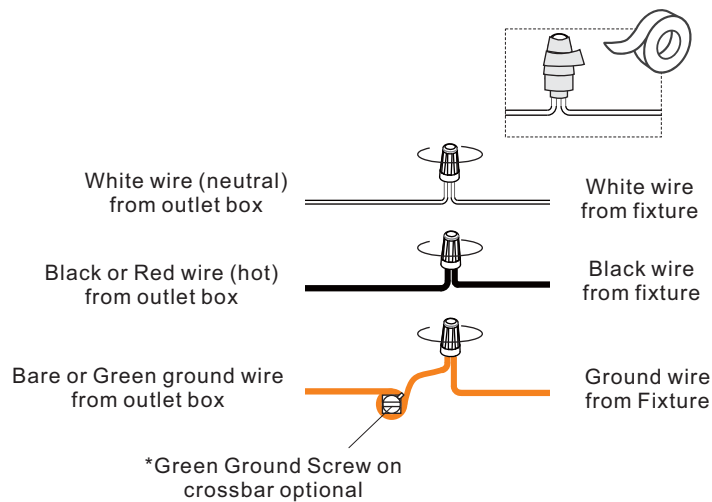


STEP 5

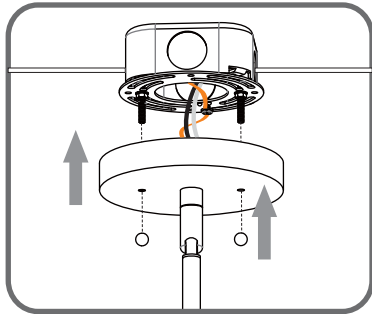


OPTION 1

SPL2820K, SPL2820LG

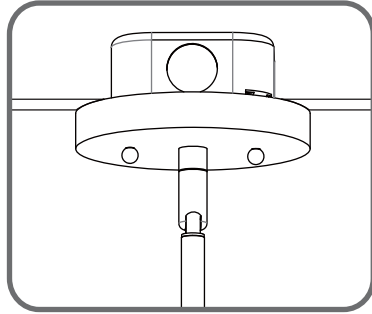

OPTION 2


SPL1720K, SPL1720LG

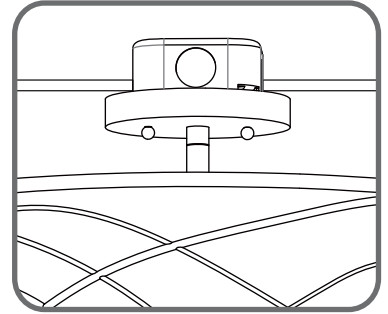

STEP 6


1

Remove finial, cap, (1) hex nut
and washers from nipple

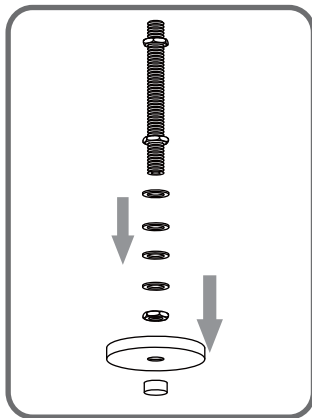



OPTION 1

SPL2820K, SPL2820LG




OPTION 2

SPL1720K, SPL1720LG

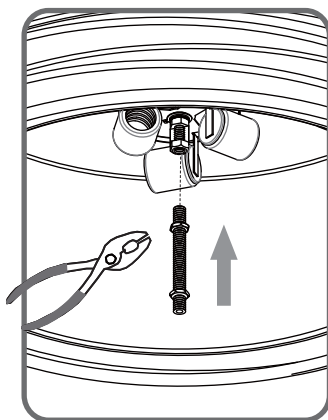

Install nipple with hex nuts

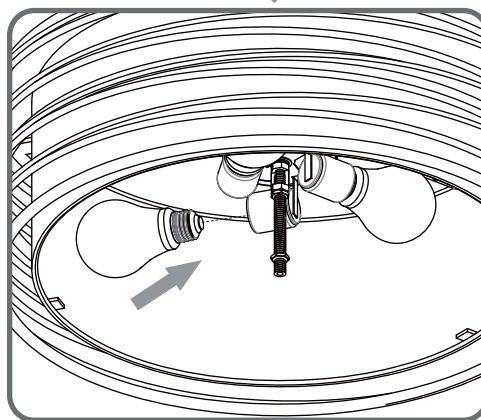

Install bulb


2

3

STEP 7


1

Turn the hex nut upward




2

Install diffuser and finial

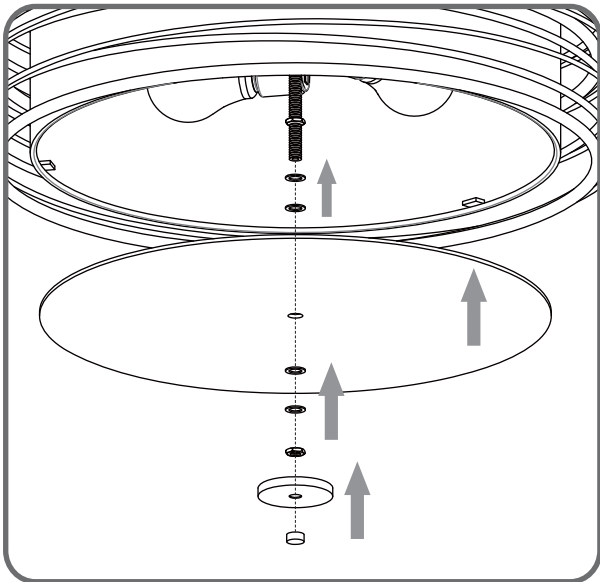


3

Tighten hex nut against the diffuser

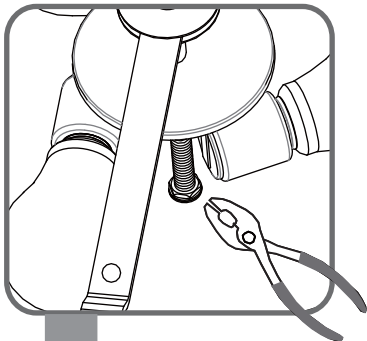

OPTION 1

SPL2820K, SPL2820LG

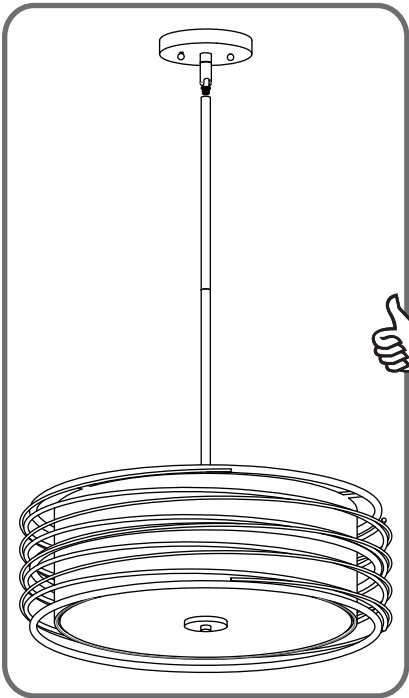

OPTION 2

SPL1720K, SPL1720LG

