





SPL2 AND SPL3 BRACKET MOUNT INSTALLATION GUIDE

INSTRUCTIONS


1. Carefully place the TV and James SPL Soundbar face down on a soft surface with the soundbar positioned flush with the bottom of the TV.

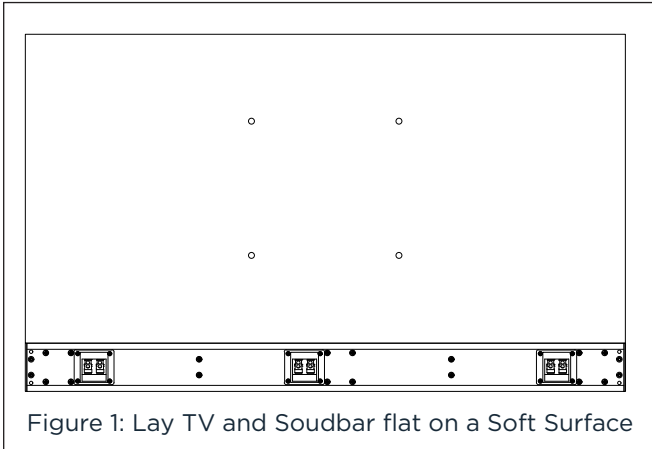


2. Attach bracket mount to the soundbar without tightening the provided pinch tabs. Adjust the bracket arms to ensure clearance of speaker terminals.

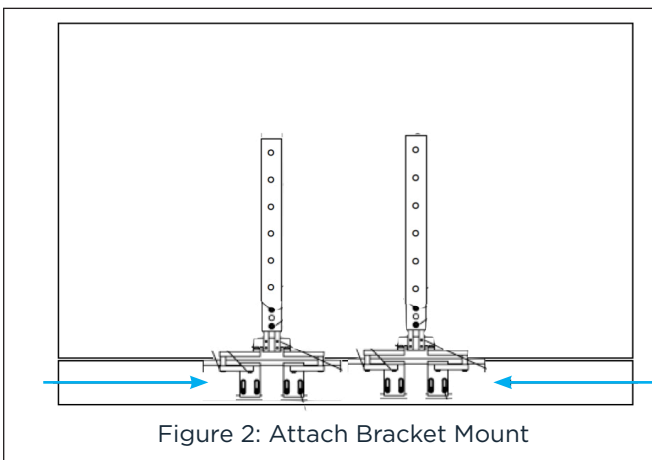


3. Loosen 10-32 Hex flathead screws on the VESA bracket and extend to match the TV's VESA hole pattern.

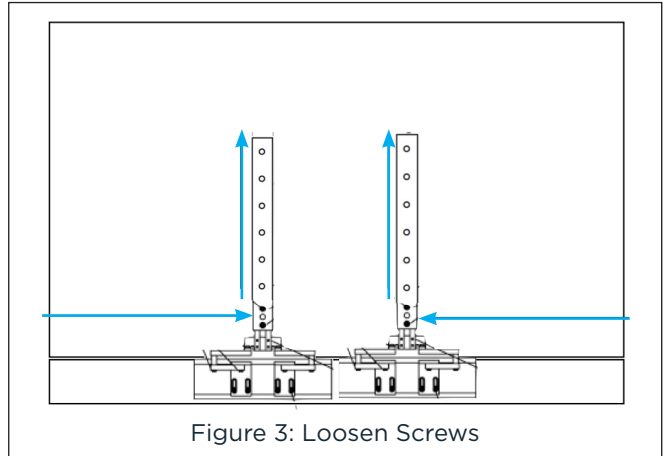


4. Install TV wall mount on top of the VESA bracket using metric screws. (Use provided spacers if necessary).

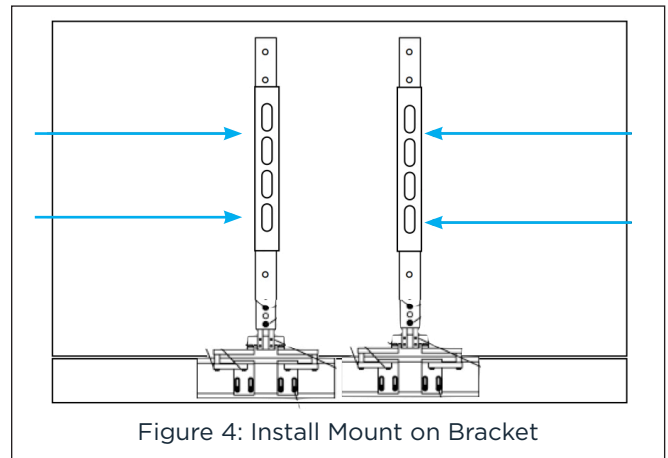

5. Tighten the bracket arm screws and the provided pinch tab screws. Loosen pinch tab screws. Slide pinch tab down into soundbar channel. Tighten pinch tabs, then tighten the bracket arm screws.

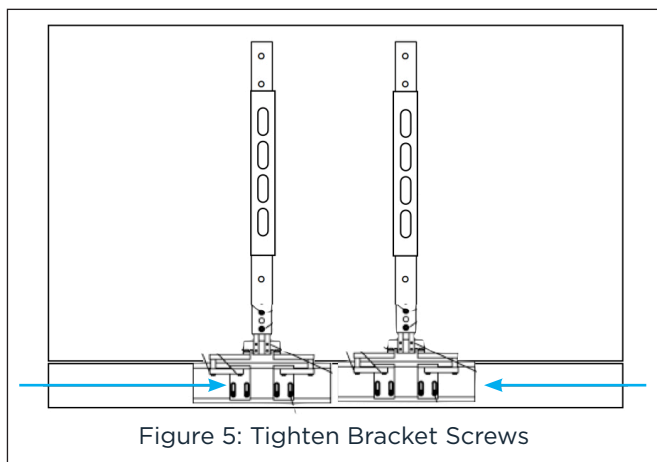

6. Tighten 10-32 Hex flathead screws on the VESA bracket to lock the bracket into position.

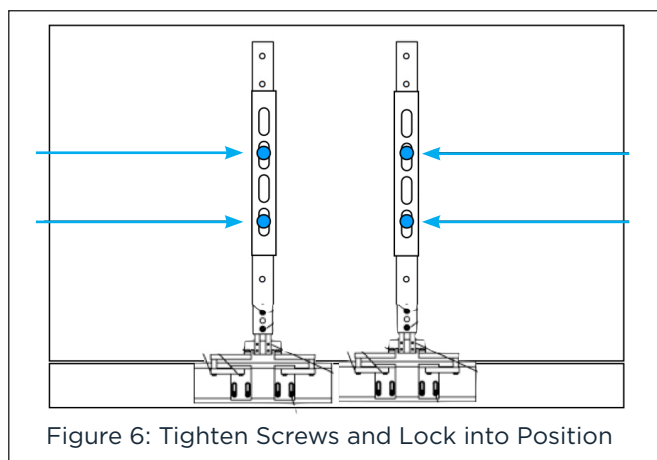

7. Hang the TV and soundbar on the wall.

