

STYLED IN ITALY. PROUDLY AMERICAN.

PATH



atlas concorde
USA



PATH

The warmth and naturalness of vein-cut travertine are recreated in a color palette that makes this collection compelling. Elegant and cool colors make it particularly suitable even for most sophisticated and minimal spaces.



PATH

Path White 11^{3/4}"x23^{5/8}" - 30x60 cm

COLORLED BODY PORCELAIN STONEWARE



White



Silver Pearl



Moka

PATH

Path White 11^{3/4}"x23^{5/8}" - 30x60 cm



PATH

COLORLED BODY PORCELAIN STONEWARE



White



Silver Pearl



Moka

PATH

COLORLED BODY PORCELAIN STONEWARE

PATH

Path Moka 17^{3/4}" x 35^{3/8}" - 45x90 cm

Path White 11^{3/4}" x 23^{5/8}" - 30x60 cm

Path Moka Cove Base 6"x12" - 15x30 cm





Compliant with standards ANSI A137.1-2012



PATH

Path White $11\frac{3}{4}'' \times 23\frac{5}{8}''$ - 30x60 cm
 Path White Net Mosaic $11\frac{3}{4}'' \times 11\frac{3}{4}''$ - 30x30 cm
 Path Silver Pearl $11\frac{3}{4}'' \times 23\frac{5}{8}''$ - 30x60 cm




PATH

SIZE - THICKNESS

11^{3/4"} x 23^{5/8"} - 30x60 cm / 17^{3/4"} x 35^{3/8"} - 45x90 cm ∇ 9 mm

FINISH

MATTE

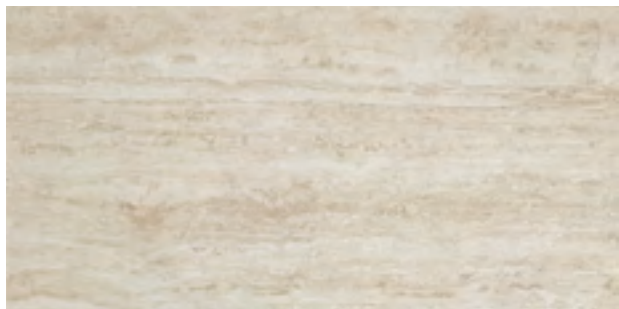


PATH White

17^{3/4"} x 35^{3/8"} - 45x90 cm - Rectified



PATH Silver Pearl

17^{3/4"} x 35^{3/8"} - 45x90 cm - Rectified

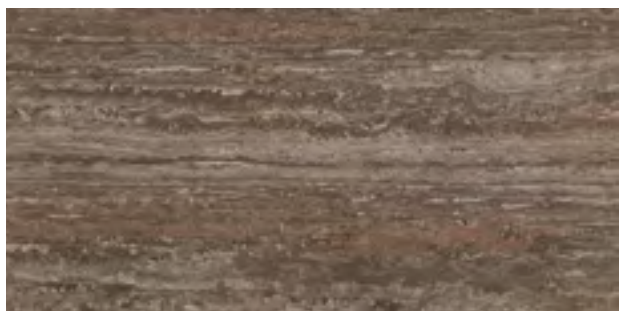


PATH Moka

17^{3/4"} x 35^{3/8"} - 45x90 cm - Rectified



PATH White

11^{3/4"} x 23^{5/8"} - 30x60 cm

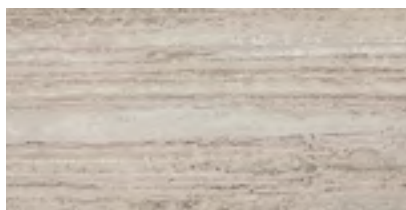

PATH Silver Pearl

11^{3/4"} x 23^{5/8"} - 30x60 cm



PATH Moka

11^{3/4"} x 23^{5/8"} - 30x60 cm



SLIGHT VARIATION

V2

Compliant with standards ANSI A137.1-2012



MOSAICS



PATH White
Net Mosaic
11^{3/4"}x11^{3/4"} - 30x30 cm
(Net Mosaic 1.5"x2")



PATH Silver Pearl
Net Mosaic
11^{3/4"}x11^{3/4"} - 30x30 cm
(Net Mosaic 1.5"x2")



PATH Moka
Net Mosaic
11^{3/4"}x11^{3/4"} - 30x30 cm
(Net Mosaic 1.5"x2")

COORDINATING TRIMS




PATH White




PATH Silver Pearl



PATH Moka



Bullnose
3"x24" - 7.2x60 cm



Cove base
6"x12" - 15x30 cm

COLORED BODY PORCELAIN STONEWARE



Compliant with standards ANSI A137.1-2012

SIZE - THICKNESS

11 3/4" x 23 5/8" - 30x60 cm ± 9 mm
17 3/4" x 35 3/8" - 45x90 cm ± 9 mm

FINISH

MATTE



V2

SLIGHT VARIATION

Clearly distinguishable differences in texture and/or pattern within similar colors.

FIELD TILES - Available in all colors

Nominal size (in)	Thickness (mm)	Finish	Rectified edge
11 3/4" x 23 5/8"	9 mm	Matte	-
17 3/4" x 35 3/8"	9 mm	Matte	Yes

MOSAICS AND COORDINATING TRIMS - Available in all colors

	Nominal size (in)	Thickness (mm)	Finish
Net Mosaic 1.5"x2"	11 3/4" x 11 3/4"	9 mm	Matte
Bullnose 3"x24"	2 7/8" x 23 5/8"	9 mm	Matte
Cove Base 6"x12"	5 7/8" x 11 3/4"	8.5 mm (*)	Matte

Please refer to caliber chart for work sizes.

Close joints are not recommended.

(*): Cove Base thickness is 7 mm on flat top part.

PERFORMANCE & FEATURES

		PROPERTY		ASTM TEST METHOD		Porcelain Tile Specification				PATH
						Calibrated		Rectified		
						Minimum	Maximum	Minimum	Maximum	
REGULARITY CHARACTERISTICS		Nominal Size	ASTM C499	-3.00%	3.00%	-3.00%	2.00%	Compliant		
		Caliber Range (Variation from average facial dimension of sample)		-0.50% or -0.08 in (-2.0 mm) (*)	0.50% or 0.08 in (2.0 mm) (*)	-0.25% or -0.03 in (-0.8 mm) (*)	0.25% or 0.03 in (0.8 mm) (*)	Compliant		
		Thickness ⁽¹⁾		N/A	Range: 0.40 in (1.02 mm)	N/A	Range: 0.40 in (1.02 mm)	Compliant		
		Wedging	ASTM C502	-0.50% or -0.08 in (-2.0 mm) (*)	0.50% or 0.08 in (2.0 mm) (*)	-0.25% or -0.03 in (-0.8 mm) (*)	0.25% or 0.03 in (0.8 mm) (*)	Compliant		
		Warpage Edge	ASTM C485	-0.75% or -0.09 in (-2.3 mm) (*)	0.75% or 0.09 in (2.3 mm) (*)	-0.40% or -0.05 in (-1.3 mm) ⁽²⁾ or -1.8 mm ⁽³⁾ (*)	0.40% or 0.05 in (1.3 mm) ⁽²⁾ or 1.8 mm ⁽³⁾ (*)	Compliant		
		Warpage Diagonal		-0.50% or -0.08 in (-2.0 mm) (*)	0.50% or 0.08 in (2.0 mm) (*)	-0.40% or -0.07 in (-1.8 mm) (*)	0.40% or 0.07 in (1.8 mm) (*)	Compliant		
				All Porcelain Tiles						
STRUCTURAL CHARACTERISTICS		Water Absorption	ASTM C373	≤ 0.5%				≤ 0.5%		
BULK MECHANICAL CHARACTERISTICS		Breaking strenght	ASTM C648	Average ≥ 250 lbf. (1.11 kN) Individual ≥ 225 lbf. (1.00 kN)				≥ 350 lbf. avg		
PHISICAL PROPERTIES		Bond Strength	ASTM C482	≥ 50 psi (0.34 Mpa)				≥ 100 psi		
THERMAL AND IGROMETRIC CHARACTERISTICS		Resistance to Freeze/ Thaw Cycling	ASTM C1026	As Reported				Resistant		
CHEMICAL CHARACTERISTICS		Chemical Resistance	ASTM C650	As Reported				Unaffected		
		Stain Resistance	ASTM C1378	As Reported				Unaffected		
SAFETY CHARACTERISTICS		Dynamic coefficient of friction	DCOF	Requires a minimum value of 0.42 for commercial areas that are likely to be wet				> 0,42 Wet		

(*) Whichever is less

(1) May not apply to textured surfaces or tiles with uneven back patterns.

(2) Whichever is less, for tiles up to 24"x24" (610 mm x 610 mm).

(3) Applies to tiles larger than 24"x24" (610 mm x 610 mm).

Atlas Concorde reserves the right to modify any product without notice and will not be liable for any direct or indirect damage resulting from such modifications. Colors and optical features of the materials illustrated in this catalogue are to be regarded as mere indications. For information and details relating to codes, packaging and weight it is recommended to refer to the latest pricelist.

Atlas Concorde Usa, Inc.
117 Seaboard Lane - Suite 170
Franklin, TN 37067 - USA