LIFESTYLE REFRIGERATION

XOU15WGBS

- Racks Absorb Vibration and Extend Fully
- Tri-Color Led Lighting
- Secure Door Lock
- Single Zone To Store and Serve

15" UNDERCOUNTER OUTDOOR WINE COOLER

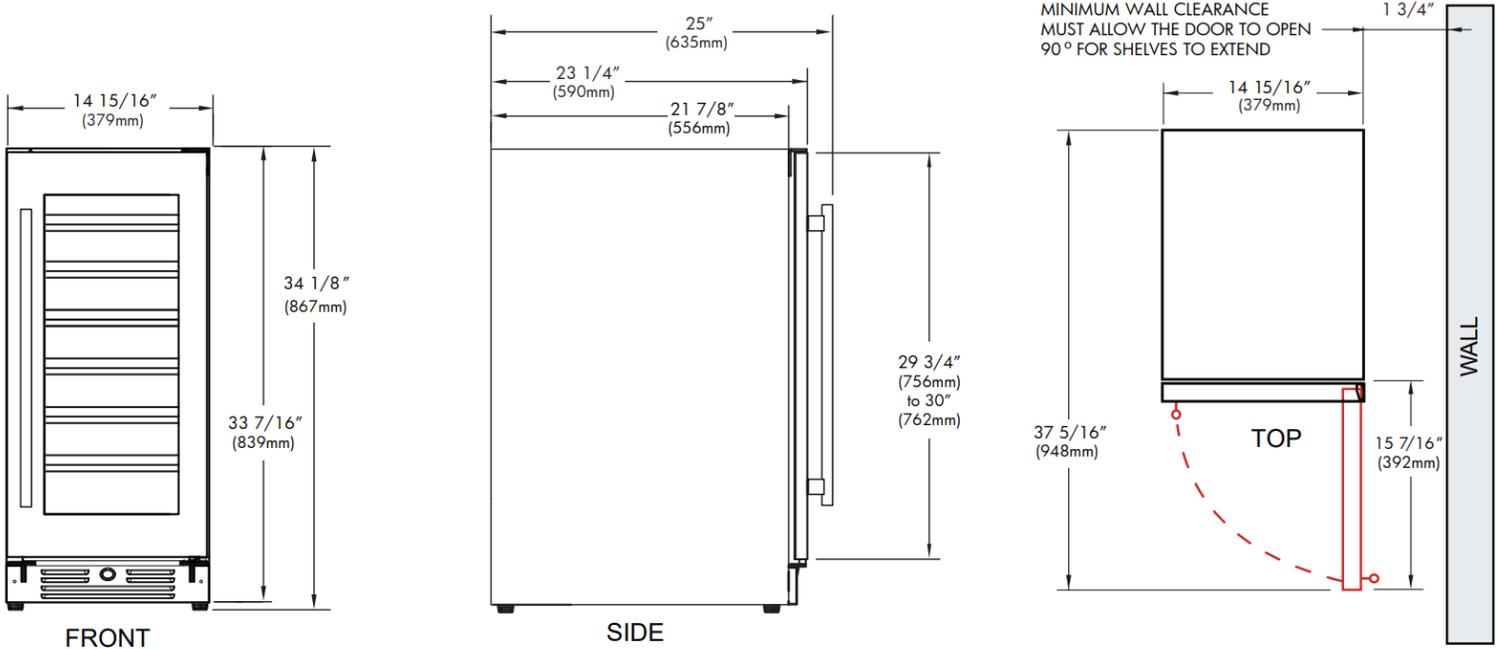Keep 34 bottles close at hand and ready to serve at 41° to 64° F.

This elegant, efficient wine storage and serving center is the perfect choice for convenient entertaining. At only 15" wide and designed to install flush with your cabinetry, this quiet and efficient wine cooler will prove to be the ideal choice for entertaining or just relaxing.

When it is all about the wine - it is all about XO.

WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES
OUR LASTING COMMITMENT TO YOU

*Specify **R** for right hand hinge - or - **L** for left hand hinge

14 15/16"
(379mm)

34 1/8"
(867mm)

33 7/16"
(839mm)

FRONT

25"
(635mm)

23 1/4"
(590mm)

21 7/8"
(556mm)

29 3/4"
(756mm)
to 30"
(762mm)

SIDE

MINIMUM WALL CLEARANCE
MUST ALLOW THE DOOR TO OPEN
90° FOR SHELVES TO EXTEND

1 3/4"

14 15/16"
(379mm)

WALL

37 5/16"
(948mm)

TOP

15 7/16"
(392mm)

FEATURES

CAPACITY

Extending wire bottle racks hold:
(30) 750ml bottles 41° To 64° F
(4) additional bottles storage at the bottom

FEATURES

- Telescoping Wire Racks Absorb Vibration
- Tri-Color Led Lighting
- Secure Door Lock
- Single Zone To Store And Serve
- Flush undercounter Installation Design
- Low-E Glass Blocks Damaging Uv Light
- Intuitive Electronic Controls
- X-Active purifies and circulates air
- Quiet Operation 39 Dba
- Designed for residential or commercial settings

Note: zero clearance hinges are visible
just above and below the door

SPECIFICATIONS

ELECTRICAL 115V 60HZ 1.2 AMP*

DIMENSIONS H 34 1/8"
W 14 15/16"
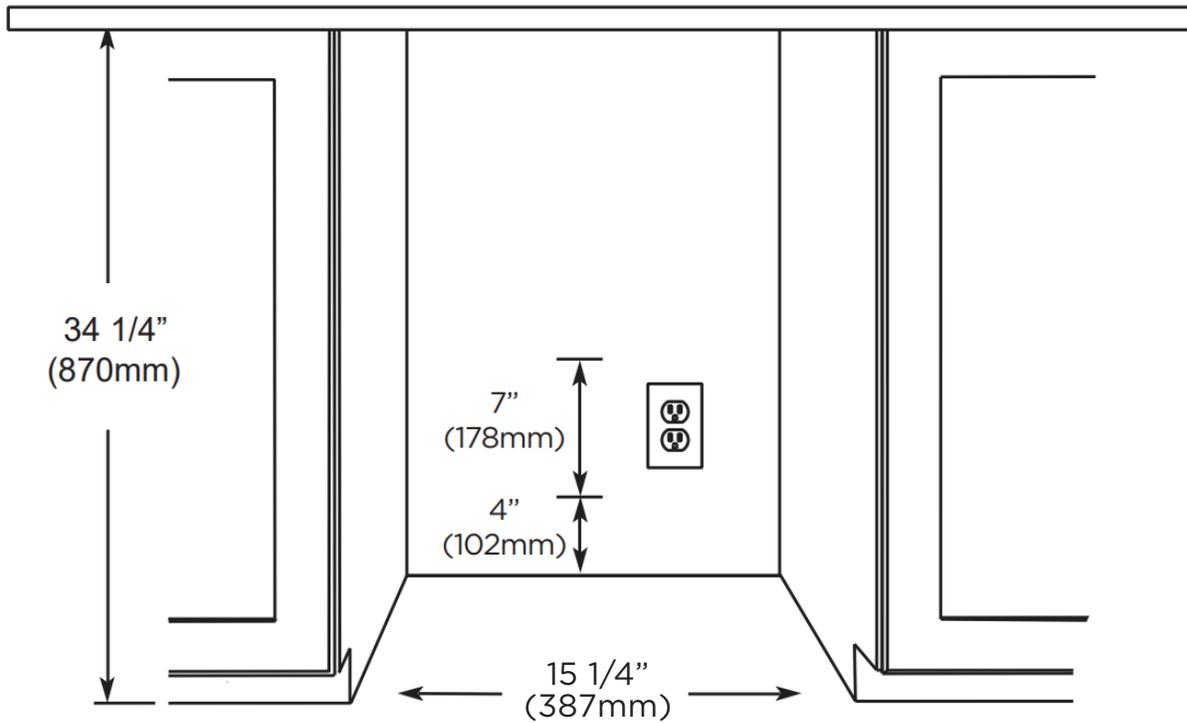D 23 1/4"

ROUGH IN H 34 1/4" min
W 15 1/4"
D 24"

REFRIGERANT R600A

DESIGNER Handle
Included

ENERGY STAR

XO the next level
in luxury appliances

xoappliance.com | 800.966.8300

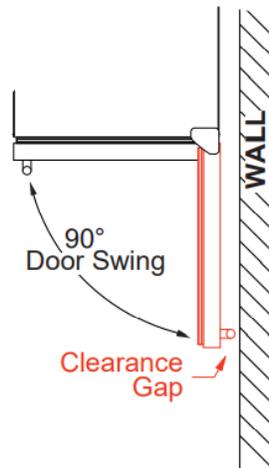**ROUGH-IN DIMENSIONS**

34 1/4"
(870mm)

7"
(178mm)

4"
(102mm)

15 1/4"
(387mm)
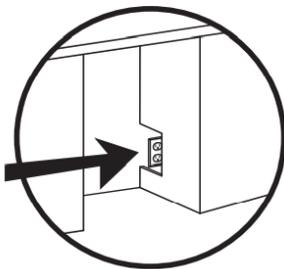
All XO undercounter units arrive pre-wired with low profile plugs for easy installation

Need more space - Cut into an adjoining cabinet to reach an outlet there

90°
Door Swing

WALL

Clearance Gap

When installing with the hinge side next to a wall -leave 1-3/4" clearance gap for cabinet handles.

Door must be able to open a minimum of 90 .

If the door cannot open fully You cannot extend the shelves.

XO the next level in luxury appliances
xoappliance.com | 800.966.8300