

PCA® Spray Faucet Attachment - 0.5 gpm max Pressure Compensating Regular Size



Features and Benefits

- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Provides non-splashing, non-aerated spray.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Also compatible with regular and vandal proof M22 and M24 metric housing.
- ▶ Available housing finishes: unplated, chrome and PVD.
- ▶ Laser marked housings: (custom logo and/or statutory mark).

Certifications

ANSI/NSF®-61-372

ASME A112.18.1M and CSA B125

Meets **CALGreen** requirements

Options Available

Part #	Designation
A5.9042.1	Insert only
40.7059.613	Regular male 15/16"-27
40.7059.623	Regular female 55/64"-27
40.7059.673	Regular dual thread 15/16"-27 / 55/64"-27
40.7059.723	Vandal proof regular male 15/16"-27
40.7059.733	Vandal proof regular female 55/64"-27
40.7059.603	Vandal proof dual thread
BX.399C.1	Regular vandal key



*Other combinations also available

- WSA applies to insert only

Color Code

Dome	Flow Regulator	Basket
Natural	Lime Green	Dark Gray

Flow Rate Curve

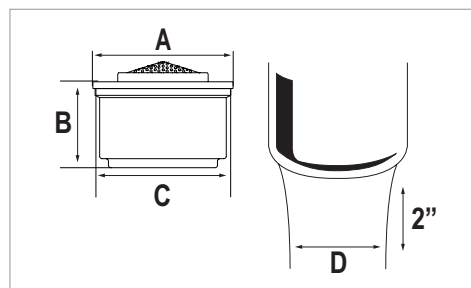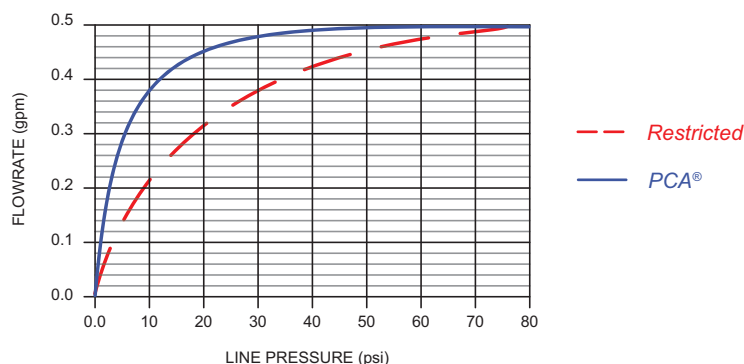

Dimensions

No	mm	In
A	20.85	.821
B	13.00	.512
C	19.95	.785
D	≈ 25	≈ 1

Housings



Technical Data

Materials: Body Acetal
O-ring EPDM
Washer EPDM
Wetted surface area: 2963 mm²

Continuous

Short-term (5 minutes max.)
Per ASME A112.18.1 testing requirements.

