


PURPOSE: To announce clearance updates to Rinnai twin pipe venting systems.

APPLICABLE PRODUCTS AND MODELS

Tankless Water Heaters		Boilers		
SENSEI™ Series	SE Series	I-Series	M-Series	
<ul style="list-style-type: none"> • RU130i • RU160i • RU180i 	<ul style="list-style-type: none"> • RU199i • RUR160i • RUR199i 	<ul style="list-style-type: none"> • RUCS Models: • RUCS65i • RUCS75i 	<ul style="list-style-type: none"> • i060C • i090C • i120C • i060S • i090S • i120S • i150S 	<ul style="list-style-type: none"> • M060C • M090C • M120C • M160C • M060S • M090S • M120S • M160S

DETAILS

Required termination clearances for twin pipe (also known as two pipe or dual pipe) venting systems have been updated to minimum 12 in. (30 cm). Technical literature will be updated to reflect the new clearances.

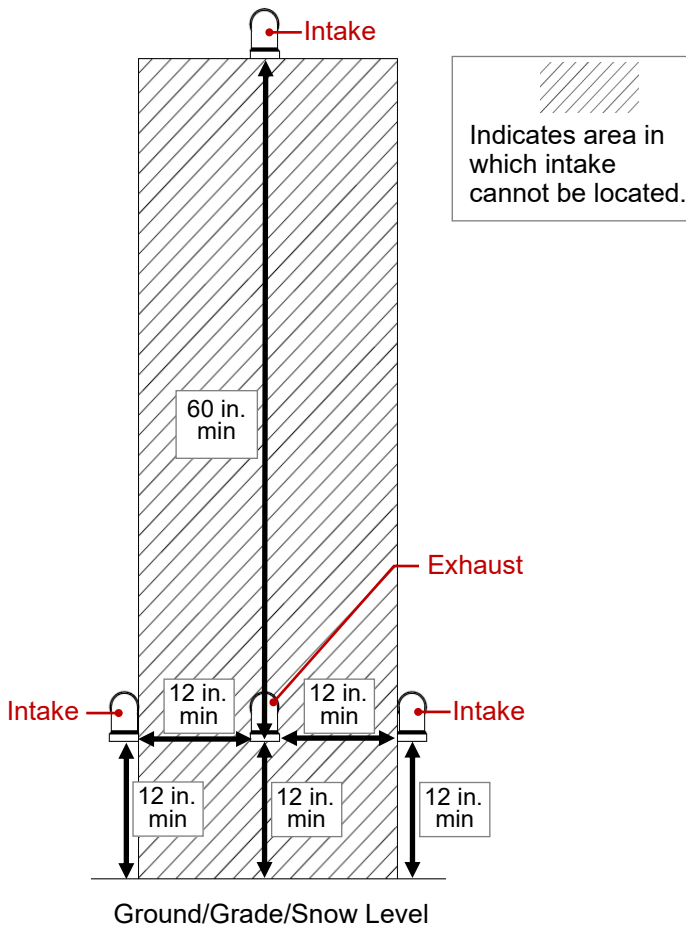

IMPORTANT

This clearance update applies only to twin pipe venting systems that are not utilizing a third-party manufactured and Rinnai-approved vent termination, such as low profile or wall termination kits (examples shown below).

Low Profile Termination Kit

Wall Termination Kit

Concentric Termination

Rinnai America Corporation • 103 International Drive, Peachtree City, GA 30269
Toll-Free: 1-800-621-9419 • Phone: 678-829-1700 • www.rinnai.us

©2019 Rinnai America Corporation. Rinnai America Corporation continually updates materials, and as such, content is subject to change without notice. Local, state, provincial, federal and national fuel gas codes must be adhered to prior to and upon installation.