



LINK 1X4-4KSPLIT

18Gbps 1x4 HDMI™ Splitter

User Manual

Version: V1.0.0



Thank you for purchasing this product

For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

Surge protection device recommended

This product contains sensitive electrical components that may be damaged by electrical spikes, surges, electric shock, lighting strikes, etc. Use of surge protection systems is highly recommended in order to protect and extend the life of your equipment.

Contents

Introduction2

 Overview.....2

 Features2

 Package Contents2

Specifications3

Operation Controls and Functions4

Application Example5

Warranty.....6

Introduction

Overview

1x4 HDMI 18Gbps Splitter is an advanced solution for splitting a single HDMI signal to 4 HDMI displays. It provides high performance audio and video output through HDMI cables up to 4K@60Hz 4:4:4 and is capable of receiving and transmitting up to 18Gbps of bandwidth with no data loss.

(Supporting the latest features you can be assured of reliable and high quality HDMI distribution.)

Features

- HDMI 2.0b, HDCP 2.2 compliant
- Supports video format up to 4K@60Hz with 8 bit RGB/YCBCR 4:4:4/YCBCR 4:2:2
- Support 3D frame sequential video format up to 1080p@60;
- Supports 3D frame sequential video format up to 4K2K@30Hz
- Supports high resolution VESA mode video format up to QSXGA@60Hz
- Supports LPCM 7.1CH, Dolby TrueHD, and DTS-HD Master Audio
- Supports smart EDID control
- Compact design for an easy and flexible installation


Package Contents

- 1× 18Gbps 1×4 HDMI Splitter
- 1× 5V/1A DC Power Adapter
- 1× User Manual

Specifications


Technical	
Video Bandwidth	600MHz/18Gbps
Input Ports	1×HDMI Type A[19-pin female]
Output Ports	4×HDMI Type A[19-pin female]
Output Resolution	480i ~1080p50/60, 4Kx2K@24/30, 4k2k@60Hz
ESD Protection	Human Body model: ±8kV (Air-gap discharge) , ±4kV (Contact discharge)
Power Supply	5V/1A DC (US/EU standards, CE/FCC/UL certified)
Dimensions	63mm (W) × 163mm (D) × 16mm (H)
Weight	260g
Chassis Material	Metal Enclosure
Silkscreen Color	Black
Operating Temperature	0°C ~ 40°C / 32°F ~ 104°F
Storage Temperature	-20°C ~ 60°C / -4°F ~ 140°F
Relative Humidity	20~90% RH (non-condensing)
Power Consumption	2W

Operation Controls and Functions

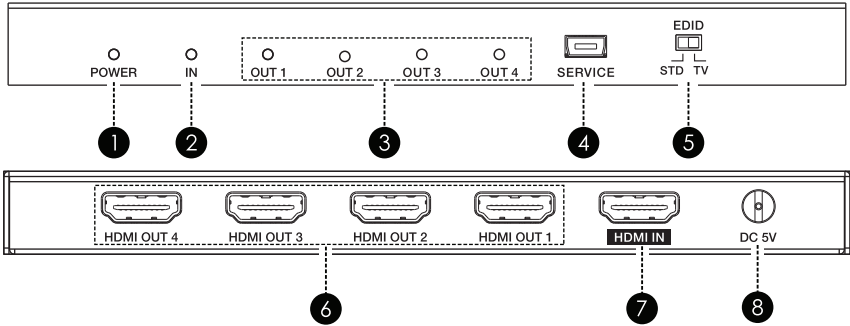

No.	Name	Function description
1	POWER LED	This blue LED illuminate when the device is connected with power supply.
2	IN LED	This blue LED illuminate when the Source connected to the device.
3	OUT LED	These blue LEDs will light up to indicate which HDMI outputs are connected to an active TV/display/monitor.
4	EDID STD	Firmware update use only.
5	EDID TV	When in 'STD' mode, the unit will use its own built-in EDID settings. In this mode, the video output will be set to 1080p@60Hz and the audio output at LPCM 2CH Stereo. Use this mode if there are display problems in TV Mode.
	EDID TV	When in 'TV' mode, the unit will read the EDID settings of the display device connected to HDMI OUT 1. If it detects a 4K capable EDID setting it will transmit the signal in that format to all outputs. If no 4K2K capable EDID is detected then the unit will output the best resolution that all displays can support.
6	HDMI OUT 1~4	Connect each of the HDMI outputs to an HDMI display for simultaneous HDMI distribution, or cascade the output to another transmitter to extend the operating distance.
7	HDMI IN	Connect the input port to the HDMI splitter output of your source device such as a DVD player or set-top box with an HDMI cable.
8	DC 5V	Plug the 5V DC power supply into the unit and connect the adaptor to an AC outlet.

Application Example

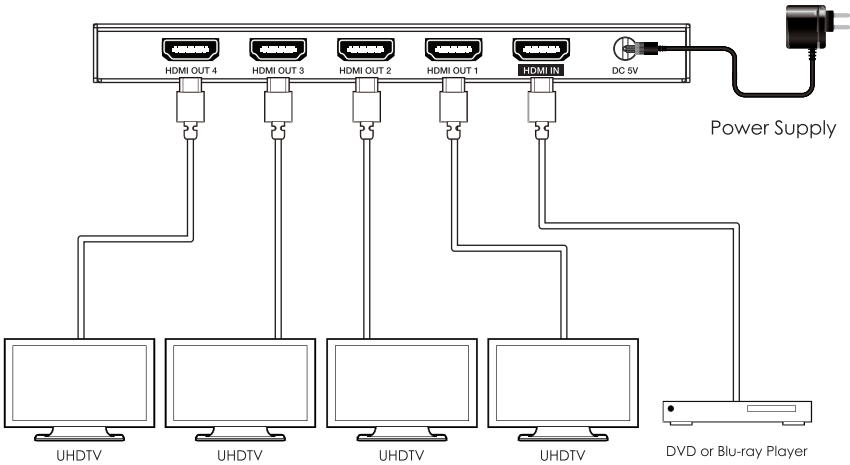

Warranty

All LINK products come with a 2-year limited liability warranty. This warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products which have been abused, modified, or disassembled. Warranty items only by authorized resellers. Warranty not eligible for products purchased through non-authorized online sellers.

A product that fails under conditions other than those covered will be repaired at the current price of parts and labor in effect at the time of repair. Such repairs are warranted for 90 days from the date of reshipment to the buyer. If the unit is delivered by mail, customers agree to insure the unit or assume the risk of loss or damage in transit. Under no circumstances will a unit be accepted without a return authorization number. The warranty is in lieu of all other warranties expressed or implied, including without limitations, any other implied warranty or fitness or merchantability for any particular purpose, all of which are expressly disclaimed. Proof of sale may be required in order to claim warranty.

