KINGSTON

Adjustable Slide Bar with Hand Shower

Installation Instructions

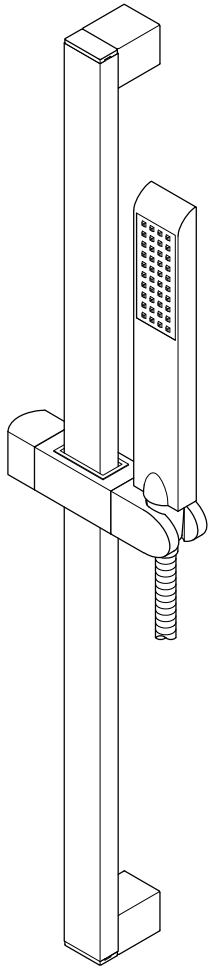

Parts:

Mounting Screw & Anchor

2 Pcs

www.kingstonbrass.com

TOLL-FREE CUSTOMER SERVICE: 1-877-2-KBRASS
TECHNICAL SUPPORT E-mail: service@kingstonbrass.com
12775 Reservoir Street, Chino, CA 91710

NOTICE

Failure to follow all directions may cause leaks which may result in water damage

⚠CAUTION

Failure to follow all installation directions may cause product to detach from the wall and cause serious injury

Tools Required



Legal Disclaimer :

This bar is not to be used as a grab bar and it is not intended to support weight. Before you begin, identify the appropriate area to install this slide bar, proper location should be above 48" from the floor (as per ASTM F446).
It is recommended that slide bar to be mounted directly to the structural framing of your home. If necessary, cross bracing can be installed to provide adequate support.

Installation Step:

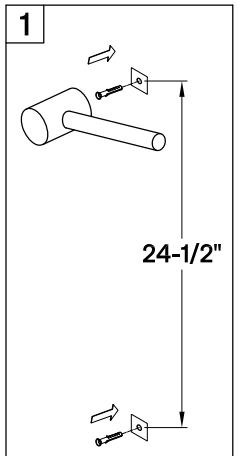

1. Mark the position of the mounting screw by inserting a pencil through the center of the end post.
Drill the holes and insert plastic anchor until it is flushed with the surface of the wall.

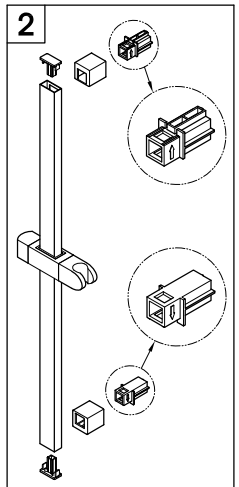

2. Take apart of the up and down fixer.

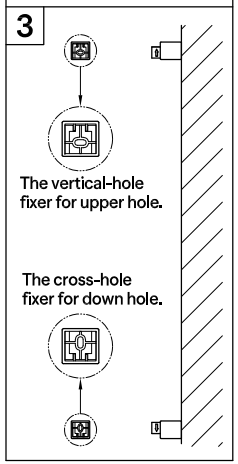

3. Take off the cover of fixer and screw it to the wall with mounting screw.
Note the fixer is different for top and bottom side.

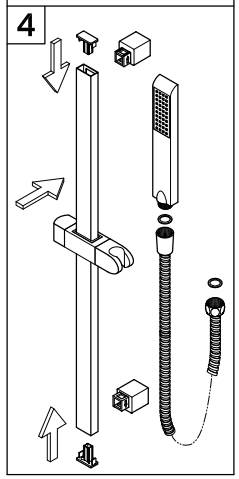

4. Attach the tube to the fixer and put the cover on and note the direction.
Then attach the hose to the hand shower and put in the slider.

©2025 LVC Kingston LLC. All Rights Reserved.

2025-05-KB