


# MOFFET STREET SMALL THREE, FOUR AND EIGHT LIGHT LANTERN

5134503; 5134504; 5134508; 5234508

## General Product Information



Intertek




STANDARD  
INSTALLATION



INDOOR



DAMP LOCATION  
SAFE




NEC COMPLIANT  
JUNCTION BOX



DIMMER  
COMPATIBLE



CLEAN WITH SOFT,  
DRY CLOTH ONLY -  
NO HARSH CHEMICALS!



SAVE THESE  
INSTRUCTIONS!

## Tools Required



PHILLIPS-HEAD  
SCREWDRIVER



WIRE CUTTER

## Safety Information

### CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

**USE MINIMUM 90°C SUPPLY CONDUCTORS.**




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



## FIXTURE PARTS

- A. Junction Box
- B. Wire Nuts
- C. Swivel (5234508 Not Including)
- D. Mounting Plate
- E. Threaded Nipple
- F. Screw Collar
- G. Canopy
- H. Collar Nut
- I. Chain
- J. Stem
- K. Fixture
- L. Lamp

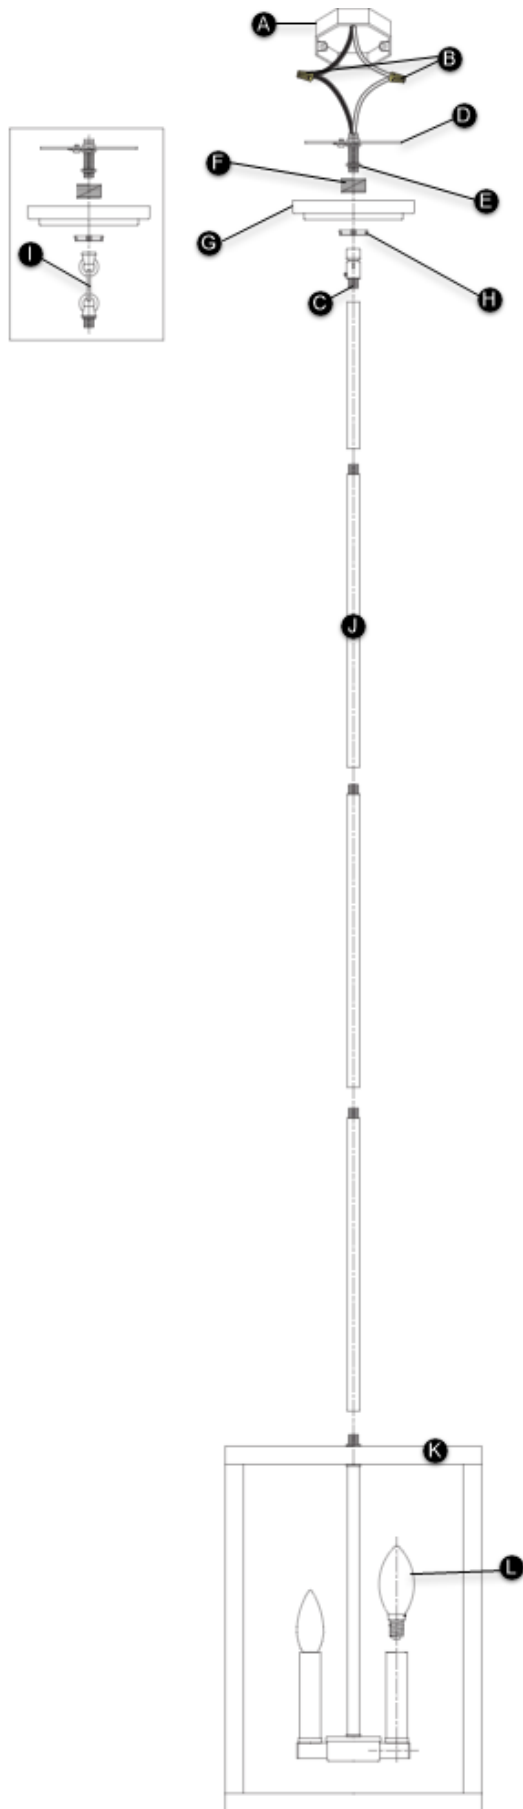

## INSTRUCTIONS

### **I. Preparing the Fixture**

1. Determine the wanted height or look of the fixture with the provided stems and/or chain and assemble them by screwing them together. All the parts may be used alone or used in combination.
2. Feed the fixture wires through the stems/chain and screw the assembly to the top of the fixture.
3. Unscrew the collar nut off the screw collar and place it onto the stem/chain followed by the canopy.
4. If necessary, screw the threaded nipple tightly onto the mounting plate.
5. Feed the fixture wires through the threaded nipple and screw the mounting plate assembly onto the stem/chain assembly.
6. Align and secure the mounting plate to the junction box.

### **II. Wiring the Fixture**

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Neutral fixture wire (square and/or ridged) to the neutral power line wire from the junction box.
  - b) Hot fixture wire (round and/or smooth) to the hot power line wire from the junction box.
4. Carefully tuck all the wires behind the mounting plate into the junction box.

### **III. Installing the Fixture**

1. Place and align the canopy over the mounting plate and secure it in place with the collar nuts.
2. Screw the lamps into the sockets, referring to the label on the socket for Max Wattage information.