

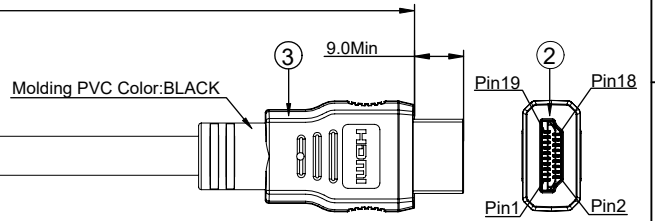
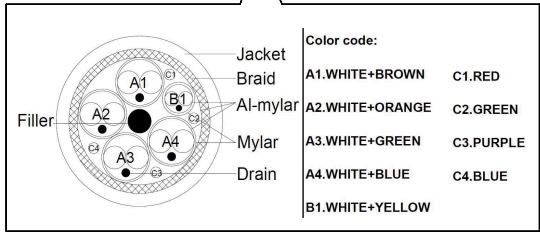
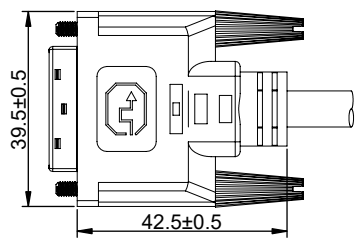



(CN.1)

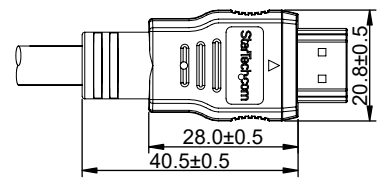

(CN.2)



Wire Pin Assignment and Wire Description:

CN.1	PAIR#	CN.2	COLOUR
2	TMDS TX2	1	WHITE
1		3	GREEN
3	TMDS TX1	2	DRAIN
10		4	WHITE
9	TMDS TX0	6	ORANGE
11		5	DRAIN
18	TMDS TXC	7	WHITE
17		9	BROWN
19	SCL	8	DRAIN
23		10	WHITE
24	SDA	12	BLUE
22		11	DRAIN
6	DDC GND	15	BLUE
7		16	GREEN
15	DC +5V	17	PURPLE
14		18	RED
16	HPD	19	YELLOW
SHELL		SHELL	BRAID

Length table:

Part NO.(F)	Length(L)
HDDVIMM3	914±30
HDMIDVIMM6	1830±50
HDMIDVIMM10	3048±70
HDMIDVIMM15	4570±70
HDDVIMM1M	1000±30
HDDVIMM2M	2000±50
HDDVIMM3M	3000±70
HDDVIMM5M	5000±70
HDDVIMM50CM	500±30
HDDVIMM150CM	1500±50

Electrical Testing :

- a. Open/Short: 100%. Testing Line-Process.
- b. HI-POT: 100V AC/0.1sec.
- c. Insulation Resistance: 10MΩ (MIN) 300V DC
- d. Conductive Resistance: 5Ω (MAX)(<5M)
10Ω (MAX)(5M-15M)

ITEM	MATERIALS LIST & SPEC. DESCRIPTION	Q'TY
⑤	DVI Thumb 4-40 UNC Screws	2PCS
④	DVI-D 18+1 Male Connector Black	1PCS
③	MOLDED Color: Black PVC	/
②	HDMI A MALE 19 PIN CONNECTOR. (GOLD PLATED CONTACTS, GOLD PLATED SHELL.)	1SET
①	HDMI CABLE: [(28AWG*2C+EAM)*4P+(30AWG*2C+EAM)+(30AWG*4C)]+AB, OD:7.3mm Copper Braid:65% Jacket Color: Black PVC	/

THIRD ANGLE PROJECTION

GENERAL NOTES
DIMENSIONS ARE IN MM - DO NOT SCALE
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS PROPERTY OF STARTECH.COM

StarTech.com

PRODUCT ID	HDDVIMMxM
DESCRIPTION	HDMI to DVI-D Cable - M/M
DO NOT SCALE	SHEET: 1 OF: 1
UPLOAD DATE: 4/13/2026	