



Installation Guide

Top and Basin Lavatory


K-3048

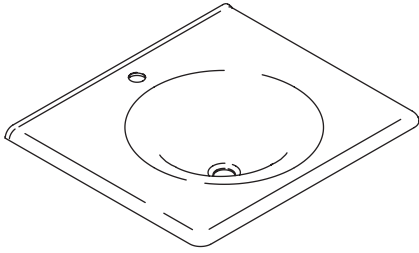


K-3049

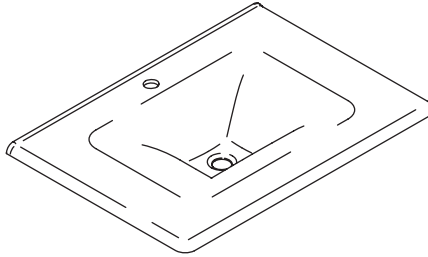


K-3051

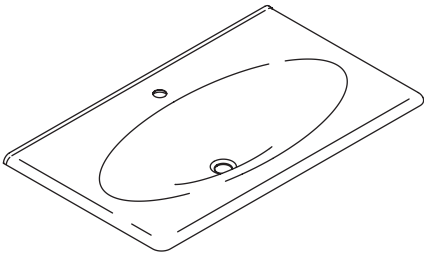


K-3052

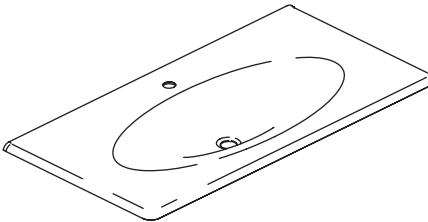

K-3053

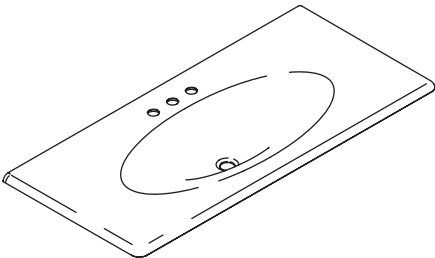

K-2372, K-14017

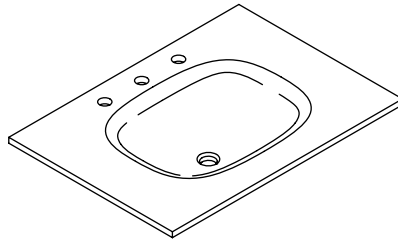


M product numbers are for Mexico (i.e. K-12345**M**)
Los números de productos seguidos de **M** corresponden a México (Ej. K-12345**M**)
Français, page "Français-1"
Español, página "Español-1"

THE BOLD LOOK
OF **KOHLER**®

1049896-2-E

Tools and Materials



Silicone Sealant



Level



Tape Measure

Plus:

- Rags or Paper Toweling


Before You Begin



CAUTION: Risk of personal injury or product damage.

Large lavatories are very heavy. Get help lifting the lavatory into place.

- Observe all local plumbing and building codes.
- Prior to installation, unpack the new lavatory and inspect it for damage. Return the lavatory to its protective carton until you are ready to install it.
- Inspect the existing drain and supply tubing. Replace if necessary.
- To ensure proper installation, get assistance aligning and lifting the lavatory into place.
- Install the faucet and drain to the lavatory before installing the lavatory.
- This lavatory has a unique drain location. If a pop-up drain will be installed, it may be necessary to bend the link in order to connect the link from the drain body to the lift rod.
- Kohler Co. reserves the right to make revisions in the design of products without notice, as specified in the Price Book.

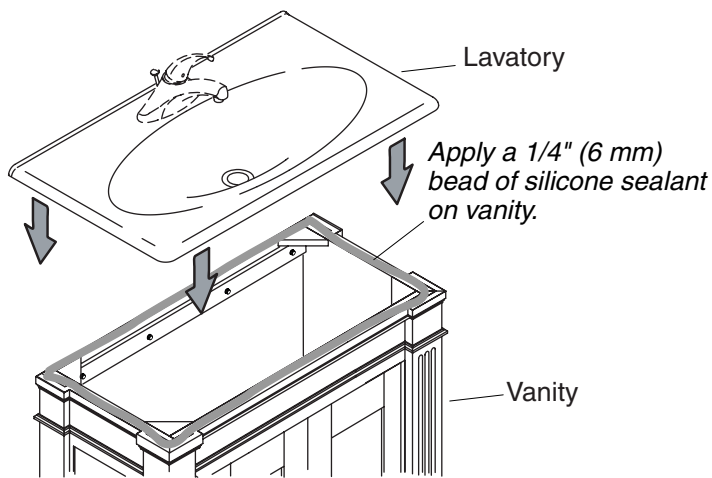

1. Install the Lavatory



CAUTION: Risk of personal injury or product damage.

Large lavatories are very heavy. Get help lifting the lavatory into place.

- Install the faucet and drain to the lavatory. Refer to the faucet and drain manufacturer's instructions.
- Apply a 1/4" (6 mm) continuous bead of silicone sealant around the top of the vanity, as illustrated.

IMPORTANT! To ensure proper installation, get assistance aligning and lifting the lavatory into place.

IMPORTANT! The back edge of the lavatory must be flush against the back of the vanity and equal left and right overhang on each side of the vanity.

- Position the lavatory on top of the vanity.
- Verify that the lavatory is level. If the lavatory is not level, gently press down on the lavatory.
- Wipe away excess silicone sealant.
- Allow the silicone sealant to set according to the sealant manufacturer's instructions.
- Complete the water supply and drain connections.
- Run water into the lavatory and check for leaks.