RM4UXB Series

Rackmount Fiber Distribution Panel

- CPE/Premise Wiring
- Data Center
- DOT
- FTTP
- MDU
- PON
- Utility / Municipality
- Wireless



RM4UXB72RSA9

The RM4UXB is a 4 RU, 12 termination panel rack mount fiber distribution unit designed to support both patching and splicing in one unit. The enclosure has a slide out master panel that allows for easy access of terminations, fiber management and splicing.


KEY PRODUCT BENEFITS

- Available with factory loaded adapter plates, splice trays and pigtails
- 19 or 23" rack mountable
- Accommodates up to 144 Fiber Ports
- Multiple Pigtail and Splice Tray Options Available
- Direct termination or fusion splice pigtails
- Slide out master tray, front or rear
- Multiple tie down points for buffer tubes and cable management
- Fanout kit securing points
- LGX compatible adapter plates or MTP modules
- Up to 12 adapter plates or MTP modules

Tii Technologies Inc.

Corporate Headquarters:
141 Rodeo Drive
Edgewood, NY 11717
Phone: 631.789.5000
Fax: 631.789.5063
Toll Free: 888.844.4720
sales@tiitech.com

RM4UXB

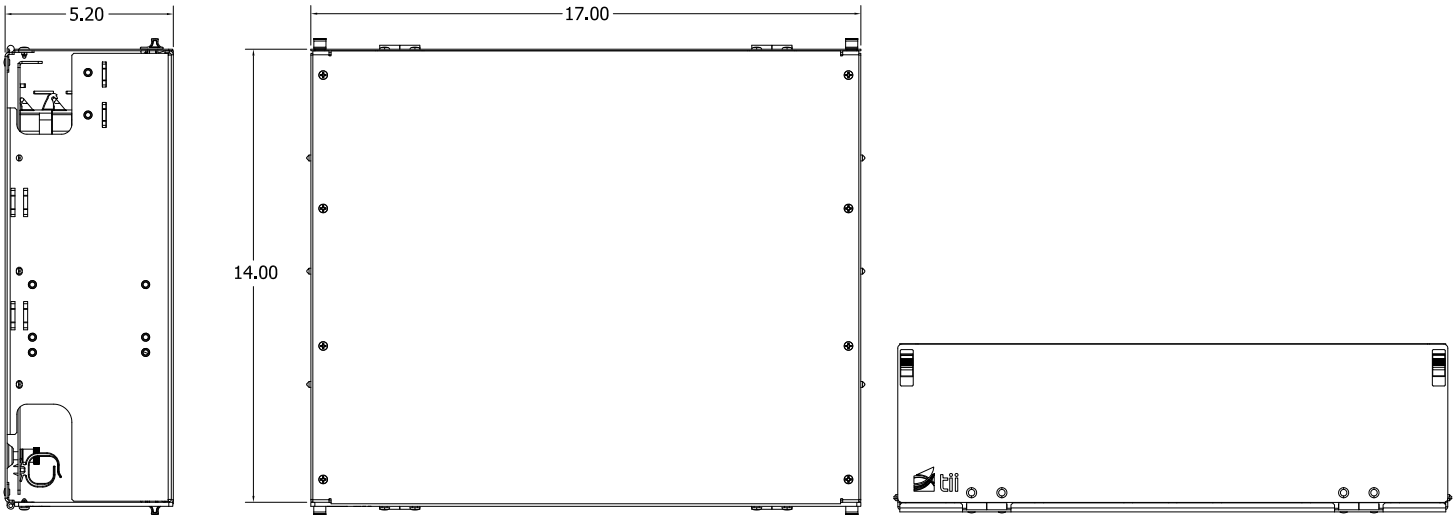

Dimensions are in Inches

MODEL NUMBER MATRIX

RM4UXB	XXX	X	XX	X
	Fiber Ports	**Fiber Type**	**Adapter**	**Pigtails & Splice Trays**
	072	R = Singlemode	FC - FC	N = None
	096	K = MM62.5 OM1	FA - FC APC	9 = 900um
	144	C = MM50 OM2	LC - LC	5 = 250um
		S = MM50 OM3	SC - SC	R = 12 Fiber Ribbon
			SA - SC APC	
			ST - ST	

SPECIFICATIONS

Model #	Description
Adapter Plates	12
Splice Trays	6
Protrusion	4.25"
Dimensions	3.4" H x 17.0" W x 14.1" D
Packaging	10" H x 20" W x 17" D
Weight	12 lbs empty, 15 lbs typical loaded
Material	0.06" Aluminum, Black powder coat

ACCESSORIES

Model #	Description
RM-SPL-BKT-2	Bracket 2 Splice Tray Capacity
FST-ASF24	Splice Tray 24 Fiber Single Fusion
LG1-xxxxxx-B	LG1 series adapter plates in black (See LG1 product guide)
RM-FM-4U	Flush mount extended rackmount ears (set of 2)