



# SYMMONS® Duro®

## Location:



### 3605-H321-V-CYL-B-TRM, 3605BTRM

### Shower System

## Specification Submittal


### Model Numbers

- 3605-H321-V-CYL-B-TRM**  
Shower System Trim (modifiers include decimal points and hyphens)
- 3605BTRM**  
Shower System Trim (use when ordering L1-L7 and TC modification, do not use hyphens or decimal points)

### Feature Highlights

- Adjustable stop screw to limit handle rotation
- 30" Slide bar
- Two function diverter body sold separately
- In-line vacuum breaker
- 60" flexible metal hose
- 1 Mode hand shower
- 1 Mode showerhead and standard 2.0 Gpm (7.6 L/min) flow restrictor
- Components made from metal and nonmetallic materials plated in standard polished chrome finish
- Valves to be ordered separately


### Modifications

- 1.5**  1.5 gpm (5.7 L/min) flow restrictor
- Delete Suffix B** Chrome plastic escutcheon on valve with color graphics/indicators in place of standard brass escutcheon
- SH4** Square, 1 mode showerhead
- TC** Test Cap Trim (includes TA-10&T-12A) used with 16 series Temptrol Valve
- L1** Less showerhead
- L2** Less hand shower (wand only)
- L3** Less showerhead and hand shower (head and wand only)
- L4** Less head, arm, and flange
- L5** Less hand shower system
- L7** Less handle
- BBZ** Brushed Bronze finish
- MB** Matte Black finish
- STN** Satin Nickel finish

### Warranty

**Limited Lifetime** - to the original end purchaser in consumer/residential installations.

**10 Years** - for commercial/industrial installations. Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.



### Compliance

-ASME A112.18.1/CSA B125.1

-WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)

-Lever handle meets ADA requirements



### SKU Builder


Series	Finish	Shower head	Modi-fier	Flow Rate	Trim (required)	Test Cap	Final SKU
3605-H321-V-CYL-B	STN			1.5	TRM		3605-H321-V-CYL-B-STN-1.5-TRM
3605B	MB	SH4	L3	15	TRM	TC	3605BMBSH4L315TRMTC

**Note:** No more than two modifiers (L1-L7) and modifier order will follow numerical order.

### Architectural/Engineering Specification



Symmons Duro Shower and Hand Shower System \_\_\_\_\_ Includes Tub and Shower and Hand Shower System powered by the Temptrol® Pressure Balancing valve. Features adjustable stop screw to limit handle rotation, 30" slide bar, in-line vacuum breaker, 60" flexible metal hose, 1 mode hand shower, 1 mode showerhead and standard 2.0 gpm (7.6 L/min) flow restrictor. Components made from metal and nonmetallic materials plated in standard polished chrome finish. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 and WaterSense compliant. Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "Delete Suffix B - Chrome plastic escutcheon", "L1 - Less showerhead", "L2 - Less hand shower (wand only)", "L3 - Less showerhead and hand shower (head and wand only)", "L4 - Less head, arm, and flange", "L5 - Less hand shower system", "L7 - Less handle", "BBZ - Brushed Bronze finish", "MB - Matte Black finish", "STN - Satin Nickel finish", "TC - Test Cap Trim".

# Dimensions

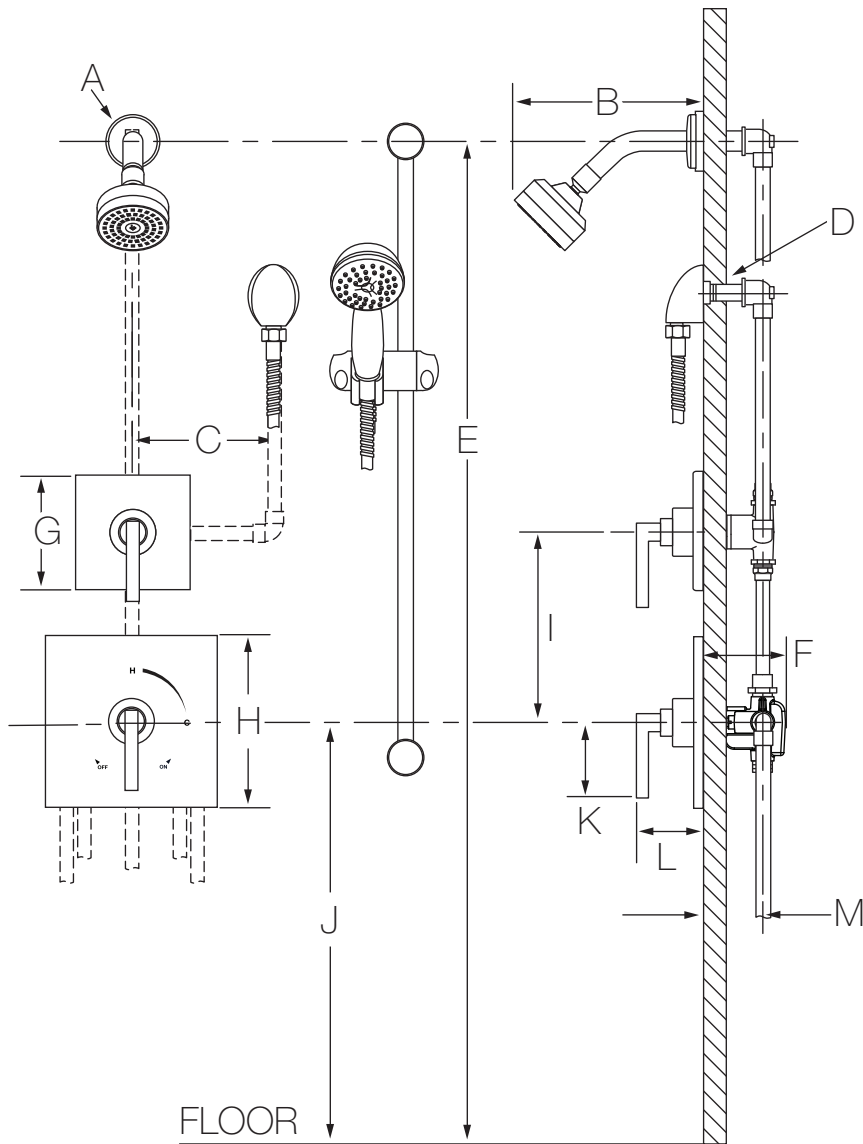

Measurements	
A	Ø 2-1/2", 64 mm
B	6", 152 mm
C	6", 152 mm
D	Male 1/2-14 NPT thread must be recessed 1/4" (6 mm) from finished wall
E	Ref. 77", 1956 mm
F	3-1/2", 89 mm
G	Sq. 5", 127 mm
H	Sq. 7-1/2", 191 mm
I	Ref. 10", 254 mm
J	Ref. 42", 1067 mm
K	3-1/8", 79 mm
L	3-1/2", 89 mm
M	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
N	6-3/4", 171 mm
O	6-3/4", 171 mm
P	5-5/8", 143 mm
Q	3-1/8", 79 mm
R	3-5/8", 92 mm
S	3-1/8", 79 mm
T	3-5/8", 92 mm

**-SH4**



**Notes:**

- 1) All dimensions measured from nominal rough-in (see M as reference).
- 2) Dimensions are subject to change without notice.