

Location:



S-9600-P, S-9600-P-TRM, S9600PTRMTC
Shower Valve System or Trim
Specification Submittal




Model Numbers	Feature Highlights
<p><input type="checkbox"/> S-9600-P Shower Valve System with integral volume control & Temptrol Pressure Balancing Shower Valve</p> <p><input type="checkbox"/> S-9600-P-TRM Shower Valve Trim with integral volume control, Temptrol Pressure Balancing Shower Valve ordered separately</p> <p><input type="checkbox"/> S9600PTRMTC Shower Valve Trim with integral volume control, TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap</p> <p>Note: -When ordering L1-L7 modifiers, remove hyphens from model number.</p>	<ul style="list-style-type: none"> • Origins Shower Valve System or Trim • Requires Temptrol® Pressure Balancing Shower Valve (included with S-9600-PLR) • Adjustable stop screw to limit handle turn (included with S-9600-PLR) • Integral volume control • Metal lever handle • Diverter tub spout not included • Showerhead not included • Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish • Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S9600PLRTRMTC)
Options/ Modifications	Compliance
<p><input type="checkbox"/> B Brass escutcheon (chrome only)</p> <p><input type="checkbox"/> CHKS Integral check stops - for use in installations where a positive shut-off device is used downstream of mixing valve</p> <p><input type="checkbox"/> REB Rebuild trim kit, includes TA-10 and TA-4</p> <p><input type="checkbox"/> X Integral service stops - allows water shut-off at valve for service</p> <p><input type="checkbox"/> L7 Less handle</p> <p>Note: Append appropriate -suffix to model number.</p>	<p>- ASME A112.18.1/CSA B125.1</p> <p>- Buy American Act (S-9600-PLR only)</p>  <p>Warranty</p> <p>Limited Lifetime - to the original end purchaser in consumer/residential installations.</p> <p>10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> 

Architectural/ Engineering Specification

Symmons Origins shower _____ Includes With adjustable stop screw to limit handle turn, metal lever handle, components shall be metal and nonmetallic construction plated in chrome. Available options: "B - Brass escutcheon (chrome only)", "CHKS - Integral check stops - for use in installations where a positive shut-off device is used downstream of mixing valve", "REB - Rebuild trim kit, includes TA-10 and TA-4", "X - Integral service stops - allows water shut-off at valve for service", "L7 - Less handle". 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, Buy American Act (S-9600-P only) compliant.

Dimensions

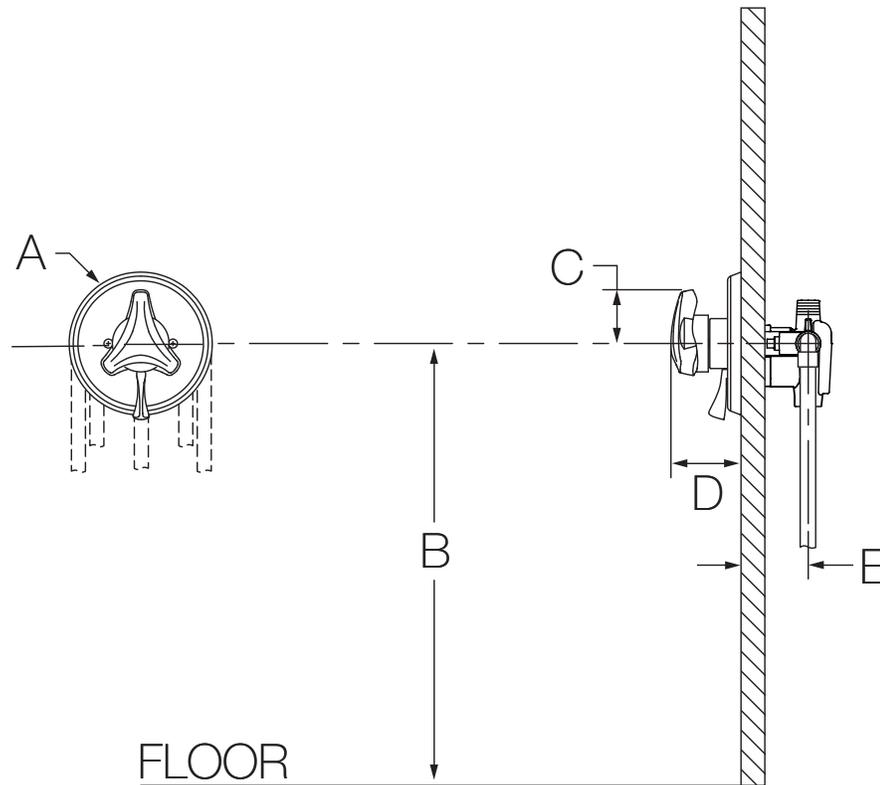

Measurements	
A	Ø 5-3/4", 146 mm
B	Ref. 42", 1067 mm
C	2-1/8", 54 mm
D	2-7/8", 73 mm
E	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see E as reference).
- 4) Dimensions subject to change without notice.